




- Cat.5,5E Surge Protector
- Hybrid GDT and Diode Technology
- Bi-Directional Protection
- Shielded Connector Configurations
- DIN Rail, Screw Lug, and Flange Mounting
- UL497B Listed



Electrical Characteristics		
Insertion loss		< 1 dB
Impulse current <i>2 x 10/350µs Test - D1 Category</i>	limp	500 A
Capacity <i>Maximum</i>	pF	<25
NOMINAL DC LINE VOLTAGE	Vdc	5
MAX. DC LINE VOLTAGE	Vdc	8
WIRES		8W+Shield+Ground
LINE CURRENT MAX	(A)	1
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
PROTECTION LEVEL	(V)	20
IMAX <i>8/20µs</i>	(kA)	16
MAX. DATA RATE	Gbps	1
MAX. FREQUENCY	Mhz	100
Mechanical Characteristics		
Weight		0.114 kg
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		Single C6A Line
CONNECTOR TYPE		Shielded RJ45
PIN OUT		[1-2][3-6][4-5][7-8]
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
Standards		
Certification		UL 497B
UL STANDARD		UL497B
UL CATEGORY		QVGQ
UL FILE NUMBER		E184939
STANDARDS		IEC 61643-21, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
560201		

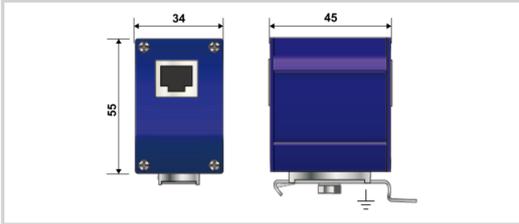