

Relays & Contactors > Relays > Signal Relays

Contact Voltage Rating: **24 VDC**Coil Power Rating DC: **1026 mW**Product Mount Type: **Printed Circuit Board**Coil Voltage Rating: **5 VDC**

Features

Configuration Features

Contact Special Features	Reed Contacts
Contact Arrangement	2 Form C (CO)
Contact Number of Poles	1

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	250 Vrms
Contact Limiting Making Current	.4 A
Contact Limiting Short-Time Current	.4 A
Contact Limiting Continuous Current	1 A
Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms
Insulation Initial Resistance	1000 MΩ
Power Consumption	50 - 288 mW
Contact Limiting Breaking Current	.4 A
Contact Switching Load (Min)	10mA @ .01V
Coil Resistance	500 Ω
Contact Voltage Rating	24 VDC

Coil Power Rating DC	1026 mW
Coil Voltage Rating	5 VDC
Contact Current Rating	.2 A
Contact Switching Voltage (Max)	200 VDC

Body Features

Product Weight	1.6 g [.0564 oz]
----------------	------------------

Contact Features

Contact Plating Material	Ruthenium
Contact Material	Gold F

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	PCB Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Product Width	5.08 mm [.2 in]
Product Length	19.8 mm [.779 in]
Product Height	7.8 mm [.307 in]

Usage Conditions

Environmental Ambient Temperature (Max)	85 °C [85 °F]
Operating Temperature Range	-40 - 85 °C

Operation/Application

Actuating System	DC
Solder Process	Wave Solder
Performance Type	Standard
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------

Other

Length Class (Mechanical)	16 - 20 mm
Environmental Ambient Temperature Class	70 - 85 °C

Height Class (Mechanical)	7 - 8 mm
Coil Power Rating Class	0 - 100 mW
Width Class (Mechanical)	0 - 6 mm
Contact Current Class	0 - 2 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

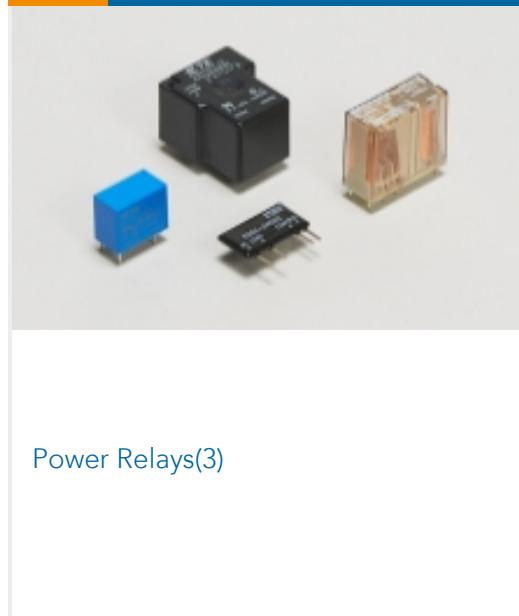
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | Axicom Reed Relay V23100 -V4

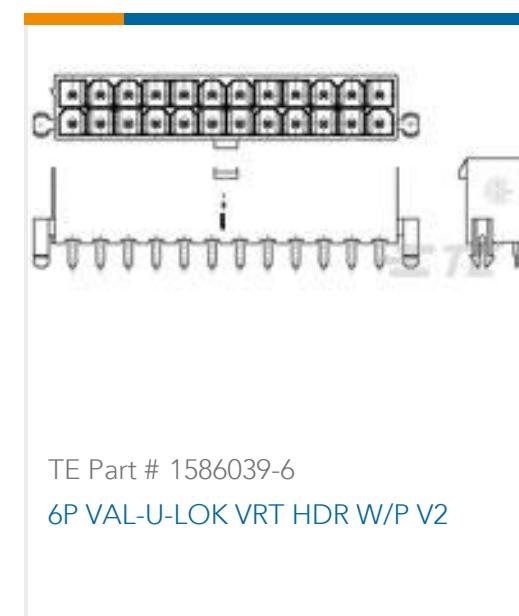
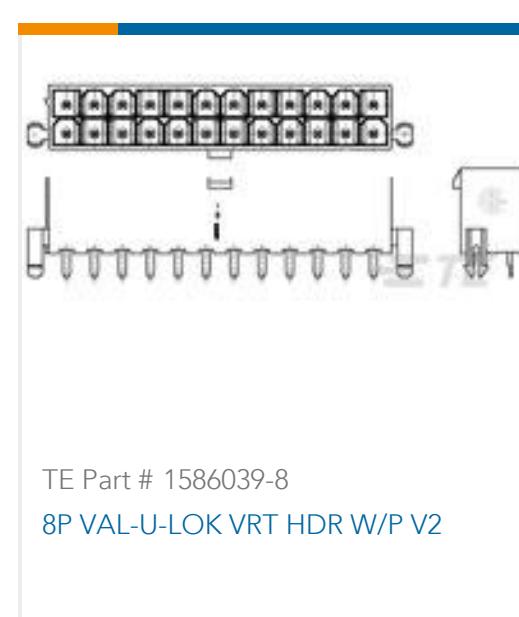


Power Relays(3)



Signal Relays(24)

Customers Also Bought

TE Part # 640903-1
RECEPT, PIDG FASTON 22-18 250TE Part # 207526-9
SKT HDR ASSY,9P,MMATE LFTE Part # 207496-9
SKT HDR ASSY,4P,MMATE LFTE Part # 1586039-6
6P VAL-U-LOK VRT HDR W/P V2TE Part # 6-103168-1
26 MODII HDR DRST SHRD .100CLTE Part # 1-770166-0
02P MINI-UMNL ASSY VO SNNI*TE Part # 1586039-8
8P VAL-U-LOK VRT HDR W/P V2TE Part # 7-1393302-5
V23134B0052C642-EV-CBOXTE Part # 63271-1
COIL TERMINAL TERMINAL 24-20
AWG PTPBR

Documents

CAD Files

[3D PDF](#)

3D

[Customer View Model](#)
[ENG_CVM_CVM_4-1393763-4_B.2d_dxf.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_4-1393763-4_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1393763-4_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Reed Relay V23100-V4](#)

English

Product Specifications

[Product Specification](#)

English

[Definitions General Purpose Relays](#)

English