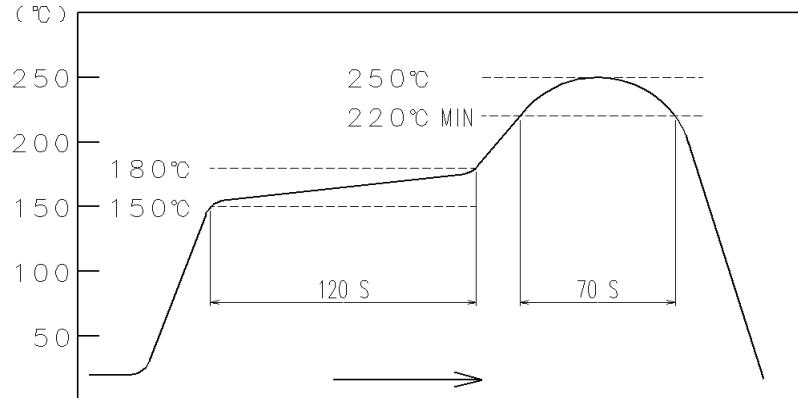


APPLICABLE STANDARD		USB2.0 SPECIFICATION AND MICRO-USB CABLES AND CONNECTORS SPECIFICATION.								
RATING	OPERATING TEMPERATURE RANGE	-30°C TO +85°C		STORAGE TEMPERATURE RANGE	-30°C TO +60°C					
	VOLTAGE	AC 30V		CURRENT	SIGNAL ONLY	1.0 A/pin				
SPECIFICATIONS										
ITEM	TEST METHOD			REQUIREMENTS		QT AT				
CONSTRUCTION										
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING.		X X				
MARKING	CONFIRMED VISUALLY.					X X				
ELECTRICAL CHARACTERISTICS										
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz).			30 mΩ MAX.		X X				
INSULATION RESISTANCE	500 V DC.			1000 MΩ MIN.		X X				
VOLTAGE PROOF	100 V AC FOR 1 min.			NO FLASHOVER OR BREAKDOWN.		X X				
CAPACITANCE	MEASURE ADJACENT TWO CONTACTS AT 1000±10 Hz AC VOLTAGE.			2 pF MAX.		X —				
MECHANICAL CHARACTERISTICS										
INSERTION AND WITHDRAWAL FORCES	A MAXIMUM RATE OF 12.5 mm/min MEASURED BY APPLICABLE CONNECTOR			INSERTION FORCE 35 N MAX. WITHDRAWAL FORCE 8 N MIN.	X —					
MECHANICAL OPERATION	10000 TIMES INSERTIONS AND EXTRACTIONS. MATING SPEED - MECHANICALLY OPERATED : 500 CYCLES / h - MANUALLY OPERATED : 200 CYCLES / h			1) CONTACT RESISTANCE: NO INCREASE OF MORE THAN 10 mΩ FROM INITIAL VALUE. 2) INSERTION FORCE 35 N MAX. WITHDRAWAL FORCE 8 N MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X —					
VIBRATION	FREQUENCY 10 TO 55 Hz SINGLE AMPLITUDE 0.75 mm, AT 2h (6 HOURS IN TOTAL) FOR 3 AXIAL DIRECTIONS.			1) NO ELECTRICAL DISCONTINUITY OF 1μs. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X —					
RANDOM VIBRATION	FREQUENCY 50 TO 2000 Hz AT 15 min (45 MINUTES IN TOTAL) FOR 3 AXIAL DIRECTIONS.				X —					
SHOCK	ACCELERATION 490 m/s ² , DURATION OF PULSE 11 ms AT 3 TIMES FOR 6 DIRECTIONS.(18 TIMES IN TOTAL)				X —					
ENVIRONMENTAL CHARACTERISTICS										
THERMAL SHOCK	TEMP -55 →+15 TO +35 →+85 →+15 TO+ 35 °C TIME 30 → 2 TO 3 → 30 → 2 TO 3 min UNDER 10 CYCLES. (MATING APPLICABLE CONNECTOR)			1) CONTACT RESISTANCE: 70 mΩ MAX. 2) INSULATION RESISTANCE: 10 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X —					
HUMIDITY LIFE	TEMPERATURE -10 ~ 65 °C, HUMIDITY 90 TO 98 % UNDER 7 CYCLES (168 h) (MATING APPLICABLE CONNECTOR)			NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X —				
DRY HEAT	EXPOSED AT 85±2 °C, 96 h. (MATING APPLICABLE CONNECTOR)			NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X —				
COLD	EXPOSED AT -40±2 °C, 96 h. (MATING APPLICABLE CONNECTOR)			NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X —				
CORROSION SALT MIST	EXPOSED AT 5 % SALT WATER, 35 °C, FOR 48h. (LEFT UNDER UNMATED CONDITION)			NO HEAVY CORROSION OF CONTACTS.		X —				
SOLDERABILITY	SOLDERING POINT IMMERSSED IN SOLDER BATH OF 255±5°C, 5 sec. (USING TYPE R FLAX)			SOLDER SHALL COVER MINIMUM OF 95% OF THE SURFACE BEING IMMERSED.		X —				
COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED					
										
REMARK				APPROVED	NM. NISHIMATSU					
HIROSE will not guarantee the performance on these specifications in case this product will be mated with the others which is not HIROSE's.				CHECKED	KN. ICHIKAWA					
Unless otherwise specified, refer to USB2.0, EIA364 or IEC 60512.				DESIGNED	TS. ITO					
Note QT:Qualification Test AT:Assurance Test X:Applicable Test				DRAWN	AK. AKIYAMA					
					15. 10. 27					
		SPECIFICATION SHEET		PART NO.	ZX62MD1-B-5P (31)					
		HIROSE ELECTRIC CO., LTD.		CODE NO.	CL242-0041-6-31	 1/2				

SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
RESISTANCE TO SOLDERING HEAT	A PROFILE IS SHOWN IN FIG-1, UNDER 2 CYCLES.	NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—



**FIG – 1 RESISTANCE TO SOLDERING HEAT
(TEMPERATURE AT TOP SURFACE OF CONNECTOR)**

RECOMMENDED PROFILE REFERS TO FIG – 2.
(TEMPERATURE AT SMT LEADS)

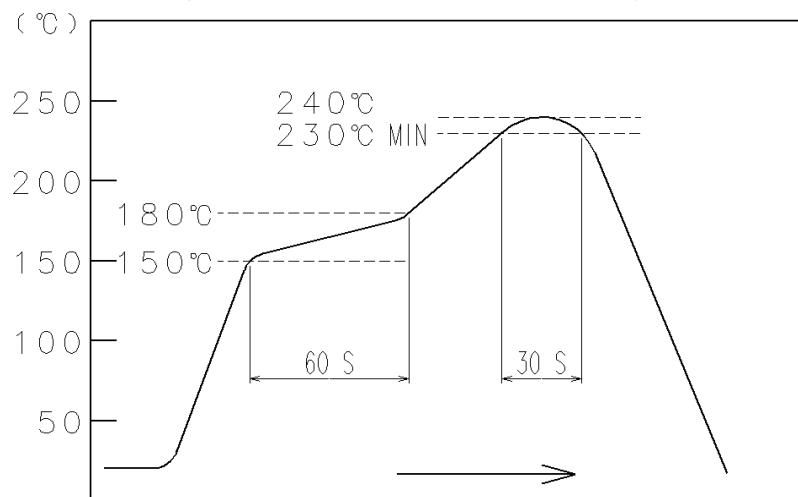


FIG – 2 RECOMMENDED REFLOW PROFILE TEMPERATURE

Note QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO.	ELC-126514-31-00	
HS	SPECIFICATION SHEET	PART NO.	ZX62MD1-B-5P (31)	
	HIROSE ELECTRIC CO., LTD.	CODE NO	CL242-0041-6-31	2/2