


# X3-Class HiPerFET™ Power MOSFET


## IXFH46N65X3

$$\begin{aligned} V_{DSS} &= 650V \\ I_{D25} &= 46A \\ R_{DS(on)} &\leq 73m\Omega \end{aligned}$$

N-Channel Enhancement Mode  
Avalanche Rated



TO-247  
(IXFH)



G = Gate      D = Drain  
S = Source    Tab = Drain

| Symbol    | Test Conditions                                                                | Maximum Ratings |                  |
|-----------|--------------------------------------------------------------------------------|-----------------|------------------|
| $V_{DSS}$ | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$                                | 650             | V                |
| $V_{DGR}$ | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ , $R_{GS} = 1M\Omega$          | 650             | V                |
| $V_{GSS}$ | Continuous                                                                     | $\pm 20$        | V                |
| $V_{GSM}$ | Transient                                                                      | $\pm 30$        | V                |
| $I_{D25}$ | $T_C = 25^\circ\text{C}$                                                       | 46              | A                |
| $I_{DM}$  | $T_C = 25^\circ\text{C}$ , Pulse Width Limited by $T_{JM}$                     | 65              | A                |
| $I_A$     | $T_C = 25^\circ\text{C}$                                                       | 10              | A                |
| $E_{AS}$  | $T_C = 25^\circ\text{C}$                                                       | 1.2             | J                |
| $dv/dt$   | $I_S \leq I_{DM}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$       | 50              | V/ns             |
| $P_D$     | $T_C = 25^\circ\text{C}$                                                       | 520             | W                |
| $T_J$     |                                                                                | -55 ... +150    | $^\circ\text{C}$ |
| $T_{JM}$  |                                                                                | 150             | $^\circ\text{C}$ |
| $T_{stg}$ |                                                                                | -55 ... +150    | $^\circ\text{C}$ |
| $T_L$     | Maximum Lead Temperature for Soldering<br>1.6 mm (0.062 in.) from Case for 10s | 300             | $^\circ\text{C}$ |
| $M_d$     | Mounting Torque                                                                | 1.13 / 10       | Nm/lb.in         |
| Weight    |                                                                                | 6               | g                |

### Features

- International Standard Package
- Low  $R_{DS(on)}$  and  $Q_G$
- Avalanche Rated
- Low Package Inductance

### Advantages

- High Power Density
- Easy to Mount
- Space Savings

### Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- PFC Circuits
- AC and DC Motor Drives
- Robotics and Servo Controls

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified) | Characteristic Values |      |                    |
|--------------|-----------------------------------------------------------------------------|-----------------------|------|--------------------|
|              |                                                                             | Min.                  | Typ. | Max.               |
| $BV_{DSS}$   | $V_{GS} = 0V$ , $I_D = 1mA$                                                 | 650                   |      | V                  |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 2.5mA$                                           | 3.2                   |      | 5.2 V              |
| $I_{GSS}$    | $V_{GS} = \pm 20V$ , $V_{DS} = 0V$                                          |                       |      | $\pm 100$ nA       |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$ , $V_{GS} = 0V$<br>$T_J = 125^\circ\text{C}$             |                       |      | 25 $\mu A$<br>2 mA |
| $R_{DS(on)}$ | $V_{GS} = 10V$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1                         |                       |      | 73 m $\Omega$      |

| Symbol<br>(T <sub>J</sub> = 25°C, Unless Otherwise Specified) | Test Conditions                                                                                                                                                                 | Characteristic Values                                            |      |           |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------|-----------|
|                                                               |                                                                                                                                                                                 | Min.                                                             | Typ. | Max       |
| <b>g<sub>fs</sub></b>                                         | V <sub>DS</sub> = 20V, I <sub>D</sub> = 0.5 • I <sub>D25</sub> , Note 1                                                                                                         | 17                                                               | 28   | S         |
| <b>R<sub>Gi</sub></b>                                         | Gate Input Resistance                                                                                                                                                           |                                                                  | 3.8  | Ω         |
| <b>C<sub>iss</sub></b>                                        | V <sub>GS</sub> = 0V, V <sub>DS</sub> = 25V, f = 1MHz                                                                                                                           |                                                                  | 2730 | pF        |
| <b>C<sub>oss</sub></b>                                        |                                                                                                                                                                                 |                                                                  | 4170 | pF        |
| <b>C<sub>rss</sub></b>                                        |                                                                                                                                                                                 |                                                                  | 18   | pF        |
| <b>Effective Output Capacitance</b>                           |                                                                                                                                                                                 |                                                                  |      |           |
| <b>C<sub>o(er)</sub></b>                                      | Energy related                                                                                                                                                                  | V <sub>GS</sub> = 0V<br>V <sub>DS</sub> = 0.8 • V <sub>DSS</sub> | 130  | pF        |
| <b>C<sub>o(tr)</sub></b>                                      | Time related                                                                                                                                                                    |                                                                  | 580  | pF        |
| <b>t<sub>d(on)</sub></b>                                      | <b>Resistive Switching Times</b><br>V <sub>GS</sub> = 10V, V <sub>DS</sub> = 0.5 • V <sub>DSS</sub> , I <sub>D</sub> = 0.5 • I <sub>D25</sub><br>R <sub>G</sub> = 3Ω (External) |                                                                  | 28   | ns        |
| <b>t<sub>r</sub></b>                                          |                                                                                                                                                                                 |                                                                  | 16   | ns        |
| <b>t<sub>d(off)</sub></b>                                     |                                                                                                                                                                                 |                                                                  | 48   | ns        |
| <b>t<sub>f</sub></b>                                          |                                                                                                                                                                                 |                                                                  | 8    | ns        |
| <b>Q<sub>g(on)</sub></b>                                      | V <sub>GS</sub> = 10V, V <sub>DS</sub> = 0.5 • V <sub>DSS</sub> , I <sub>D</sub> = 0.5 • I <sub>D25</sub>                                                                       |                                                                  | 40   | nC        |
| <b>Q<sub>gs</sub></b>                                         |                                                                                                                                                                                 |                                                                  | 13   | nC        |
| <b>Q<sub>gd</sub></b>                                         |                                                                                                                                                                                 |                                                                  | 12   | nC        |
| <b>R<sub>thJC</sub></b>                                       |                                                                                                                                                                                 |                                                                  | 0.21 | 0.24 °C/W |
| <b>R<sub>thCS</sub></b>                                       |                                                                                                                                                                                 |                                                                  |      | °C/W      |

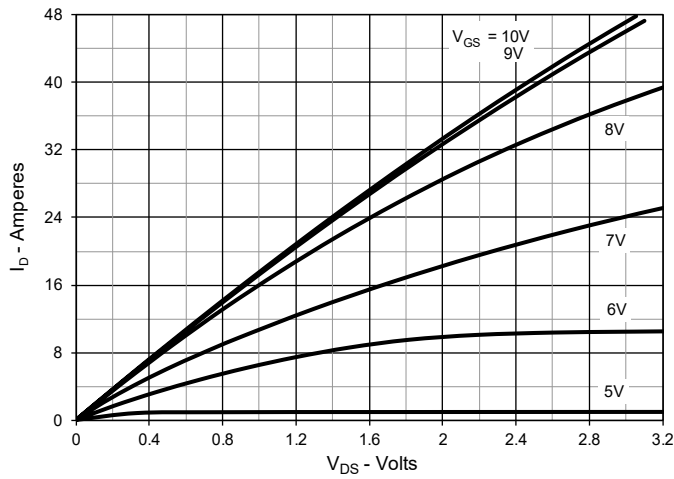
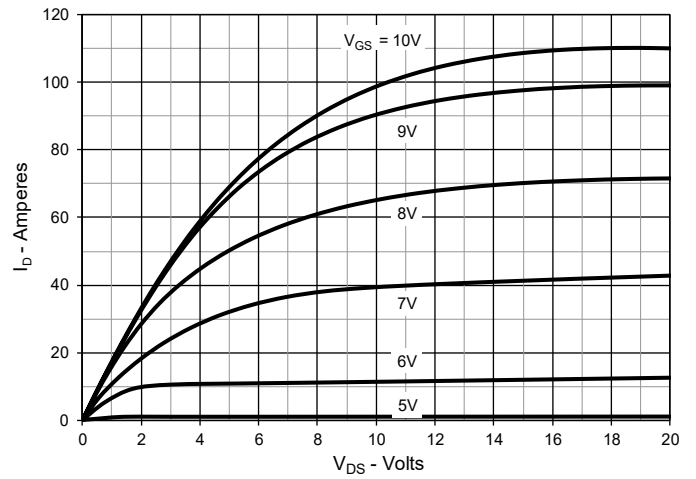
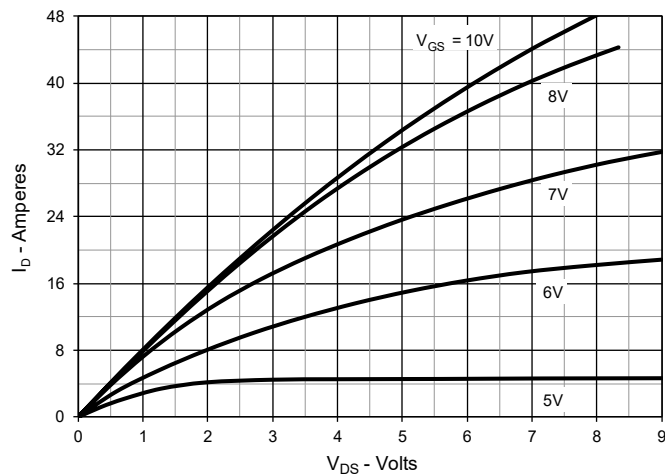
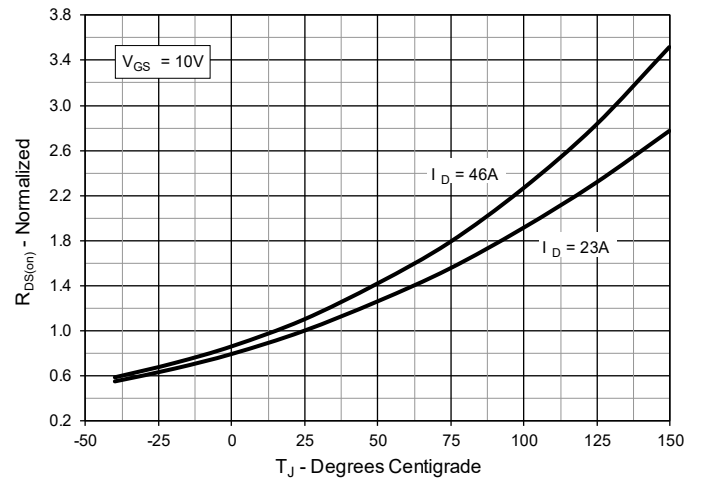
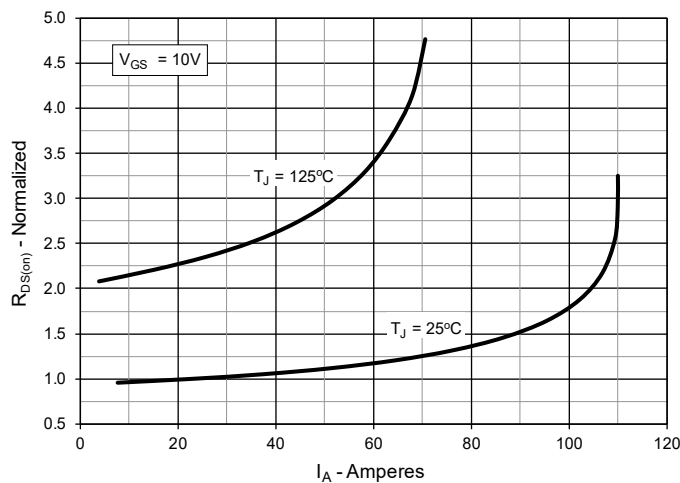
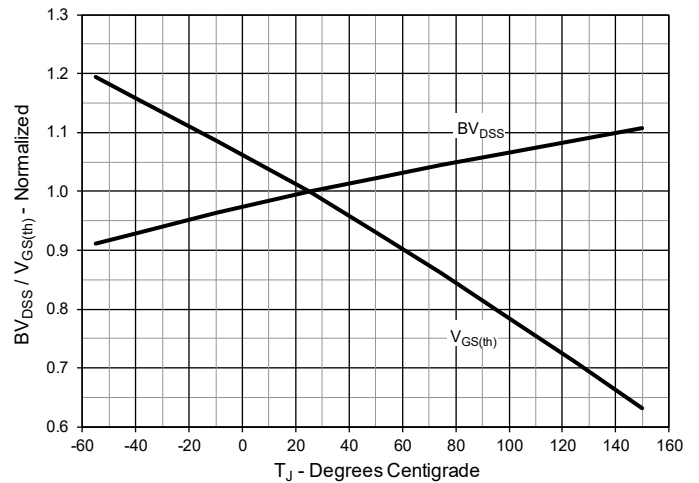
### Source-Drain Diode

| Symbol   | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)    | Characteristic Values |      |               |
|----------|--------------------------------------------------------------------------------|-----------------------|------|---------------|
|          |                                                                                | Min.                  | Typ. | Max           |
| $I_S$    | $V_{GS} = 0\text{V}$                                                           |                       |      | 46 A          |
| $I_{SM}$ | Repetitive, Pulse Width Limited by $T_{JM}$                                    |                       |      | 184 A         |
| $V_{SD}$ | $I_F = I_S$ , $V_{GS} = 0\text{V}$ , Note 1                                    |                       |      | 1.4 V         |
| $t_{rr}$ | $I_F = 23\text{A}$ , $-di/dt = 100\text{A}/\mu\text{s}$<br>$V_R = 100\text{V}$ |                       | 165  | ns            |
| $Q_{RM}$ |                                                                                |                       | 1.3  | $\mu\text{C}$ |
| $I_{RM}$ |                                                                                |                       | 16.0 | A             |

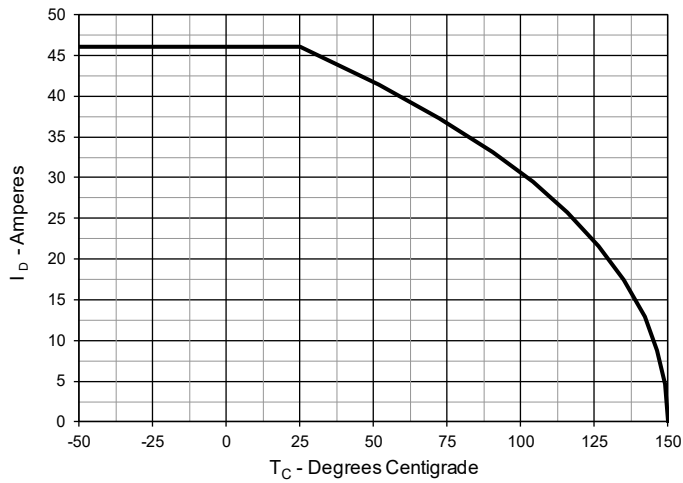
Note 1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .

Littelfuse reserves the right to change limits, test conditions and dimensions.

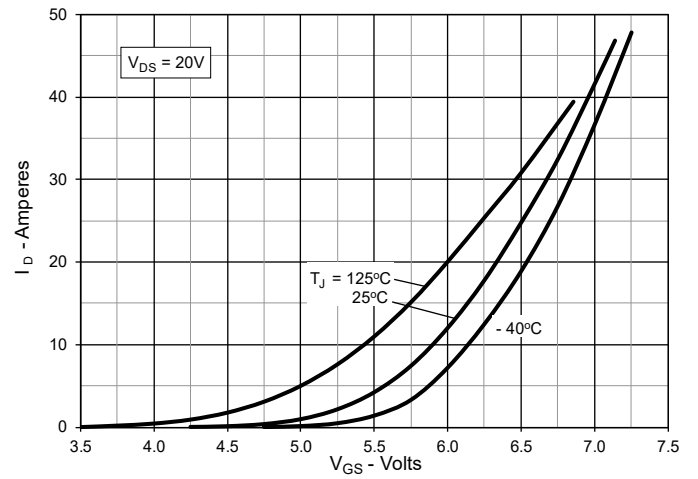
|                                               |           |           |           |           |             |             |             |             |             |             |
|-----------------------------------------------|-----------|-----------|-----------|-----------|-------------|-------------|-------------|-------------|-------------|-------------|
| IXYS MOSFETs and IGBTs are covered            | 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665   | 6,404,065B1 | 6,683,344   | 6,727,585   | 7,005,734B2 | 7,157,338B2 |
| by one or more of the following U.S. patents: | 4,860,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123B1 | 6,534,343   | 6,710,405B2 | 6,759,692   | 7,063,975B2 |             |
|                                               | 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728B1 | 6,583,505   | 6,710,463   | 6,771,478B2 | 7,071,537   |             |

**Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$** 

**Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$** 

**Fig. 3. Output Characteristics @  $T_J = 125^\circ\text{C}$** 

**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 23\text{A}$  Value vs. Junction Temperature**

**Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = 23\text{A}$  Value vs. Drain Current**

**Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature**


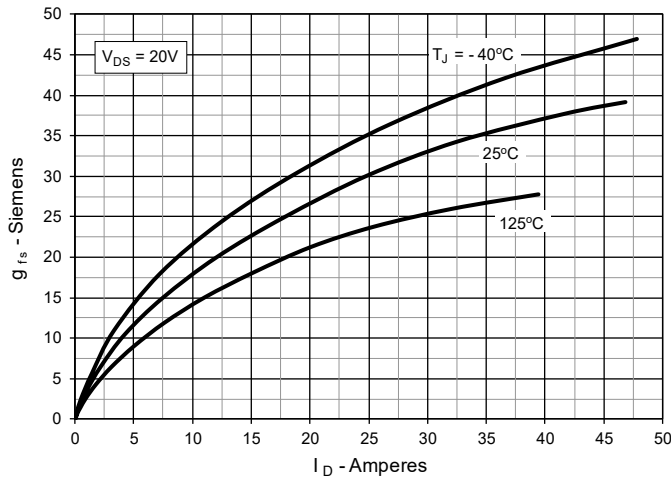
**Fig. 7. Maximum Drain Current vs. Case Temperature**



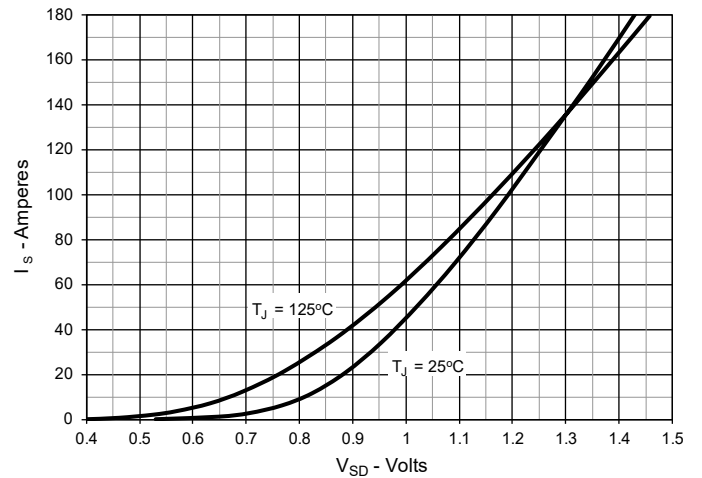
**Fig. 8. Input Admittance**



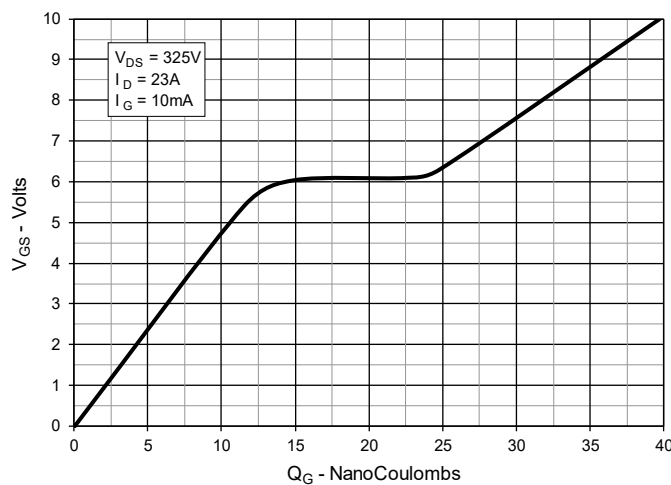
**Fig. 9. Transconductance**



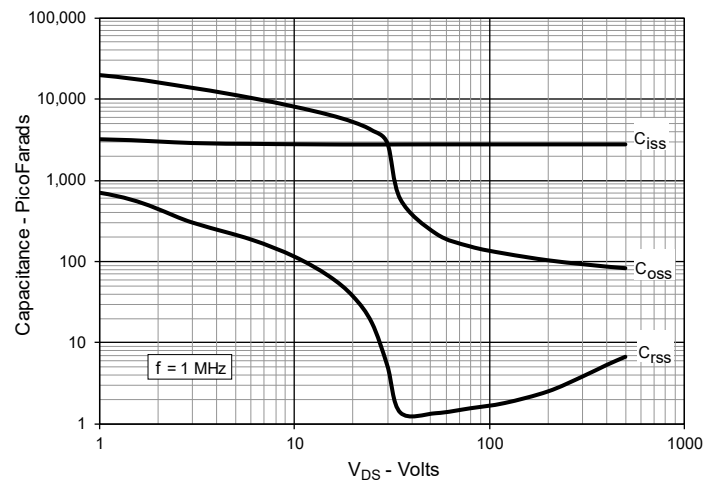
**Fig. 10. Forward Voltage Drop of Intrinsic Diode**



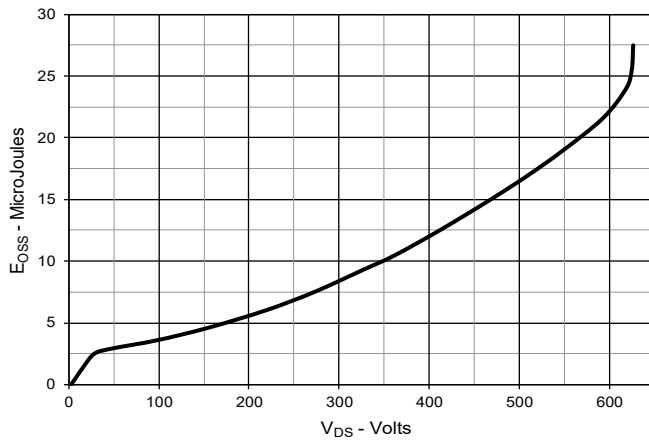
**Fig. 11. Gate Charge**



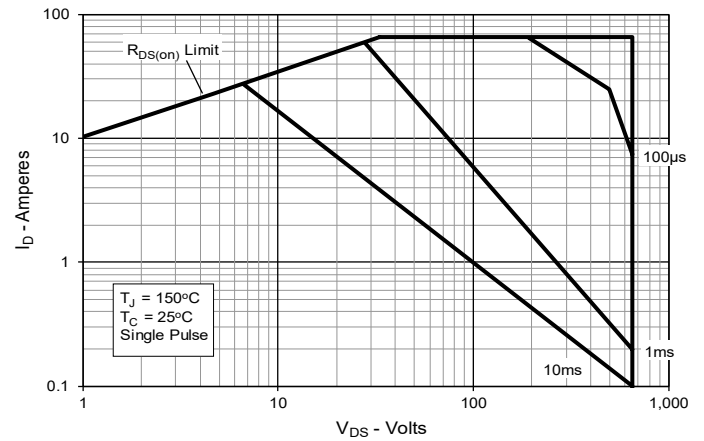
**Fig. 12. Capacitance**



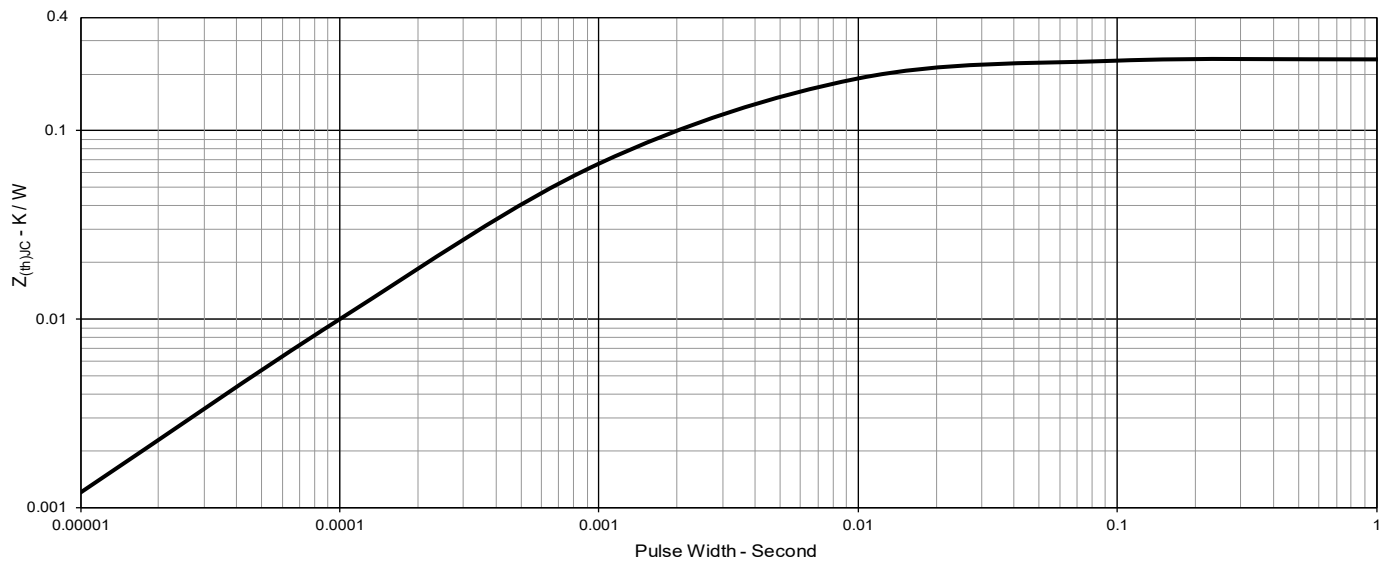
**Fig. 13. Output Capacitance Stored Energy**

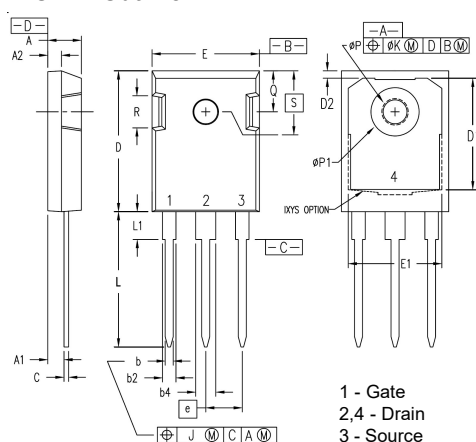


**Fig. 14. Forward-Bias Safe Operating Area**



**Fig. 15. Maximum Transient Thermal Impedance**



**TO-247 Outline**


| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .190     | .205 | 4.83        | 5.21  |
| A1  | .090     | .100 | 2.29        | 2.54  |
| A2  | .075     | .085 | 1.91        | 2.16  |
| b   | .045     | .055 | 1.14        | 1.40  |
| b2  | .075     | .087 | 1.91        | 2.20  |
| b4  | .115     | .126 | 2.92        | 3.20  |
| C   | .024     | .031 | 0.61        | 0.80  |
| D   | .819     | .840 | 20.80       | 21.34 |
| D1  | .650     | .690 | 16.51       | 17.53 |
| D2  | .035     | .050 | 0.89        | 1.27  |
| E   | .620     | .635 | 15.75       | 16.13 |
| E1  | .545     | .565 | 13.84       | 14.35 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| J   | --       | .010 | --          | 0.25  |
| K   | --       | .025 | --          | 0.64  |
| L   | .780     | .810 | 19.81       | 20.57 |
| L1  | .150     | .170 | 3.81        | 4.32  |
| øP  | .140     | .144 | 3.55        | 3.65  |
| øP1 | .275     | .290 | 6.99        | 7.37  |
| Q   | .220     | .244 | 5.59        | 6.20  |
| R   | .170     | .190 | 4.32        | 4.83  |
| S   | .242 BSC |      | 6.15 BSC    |       |