



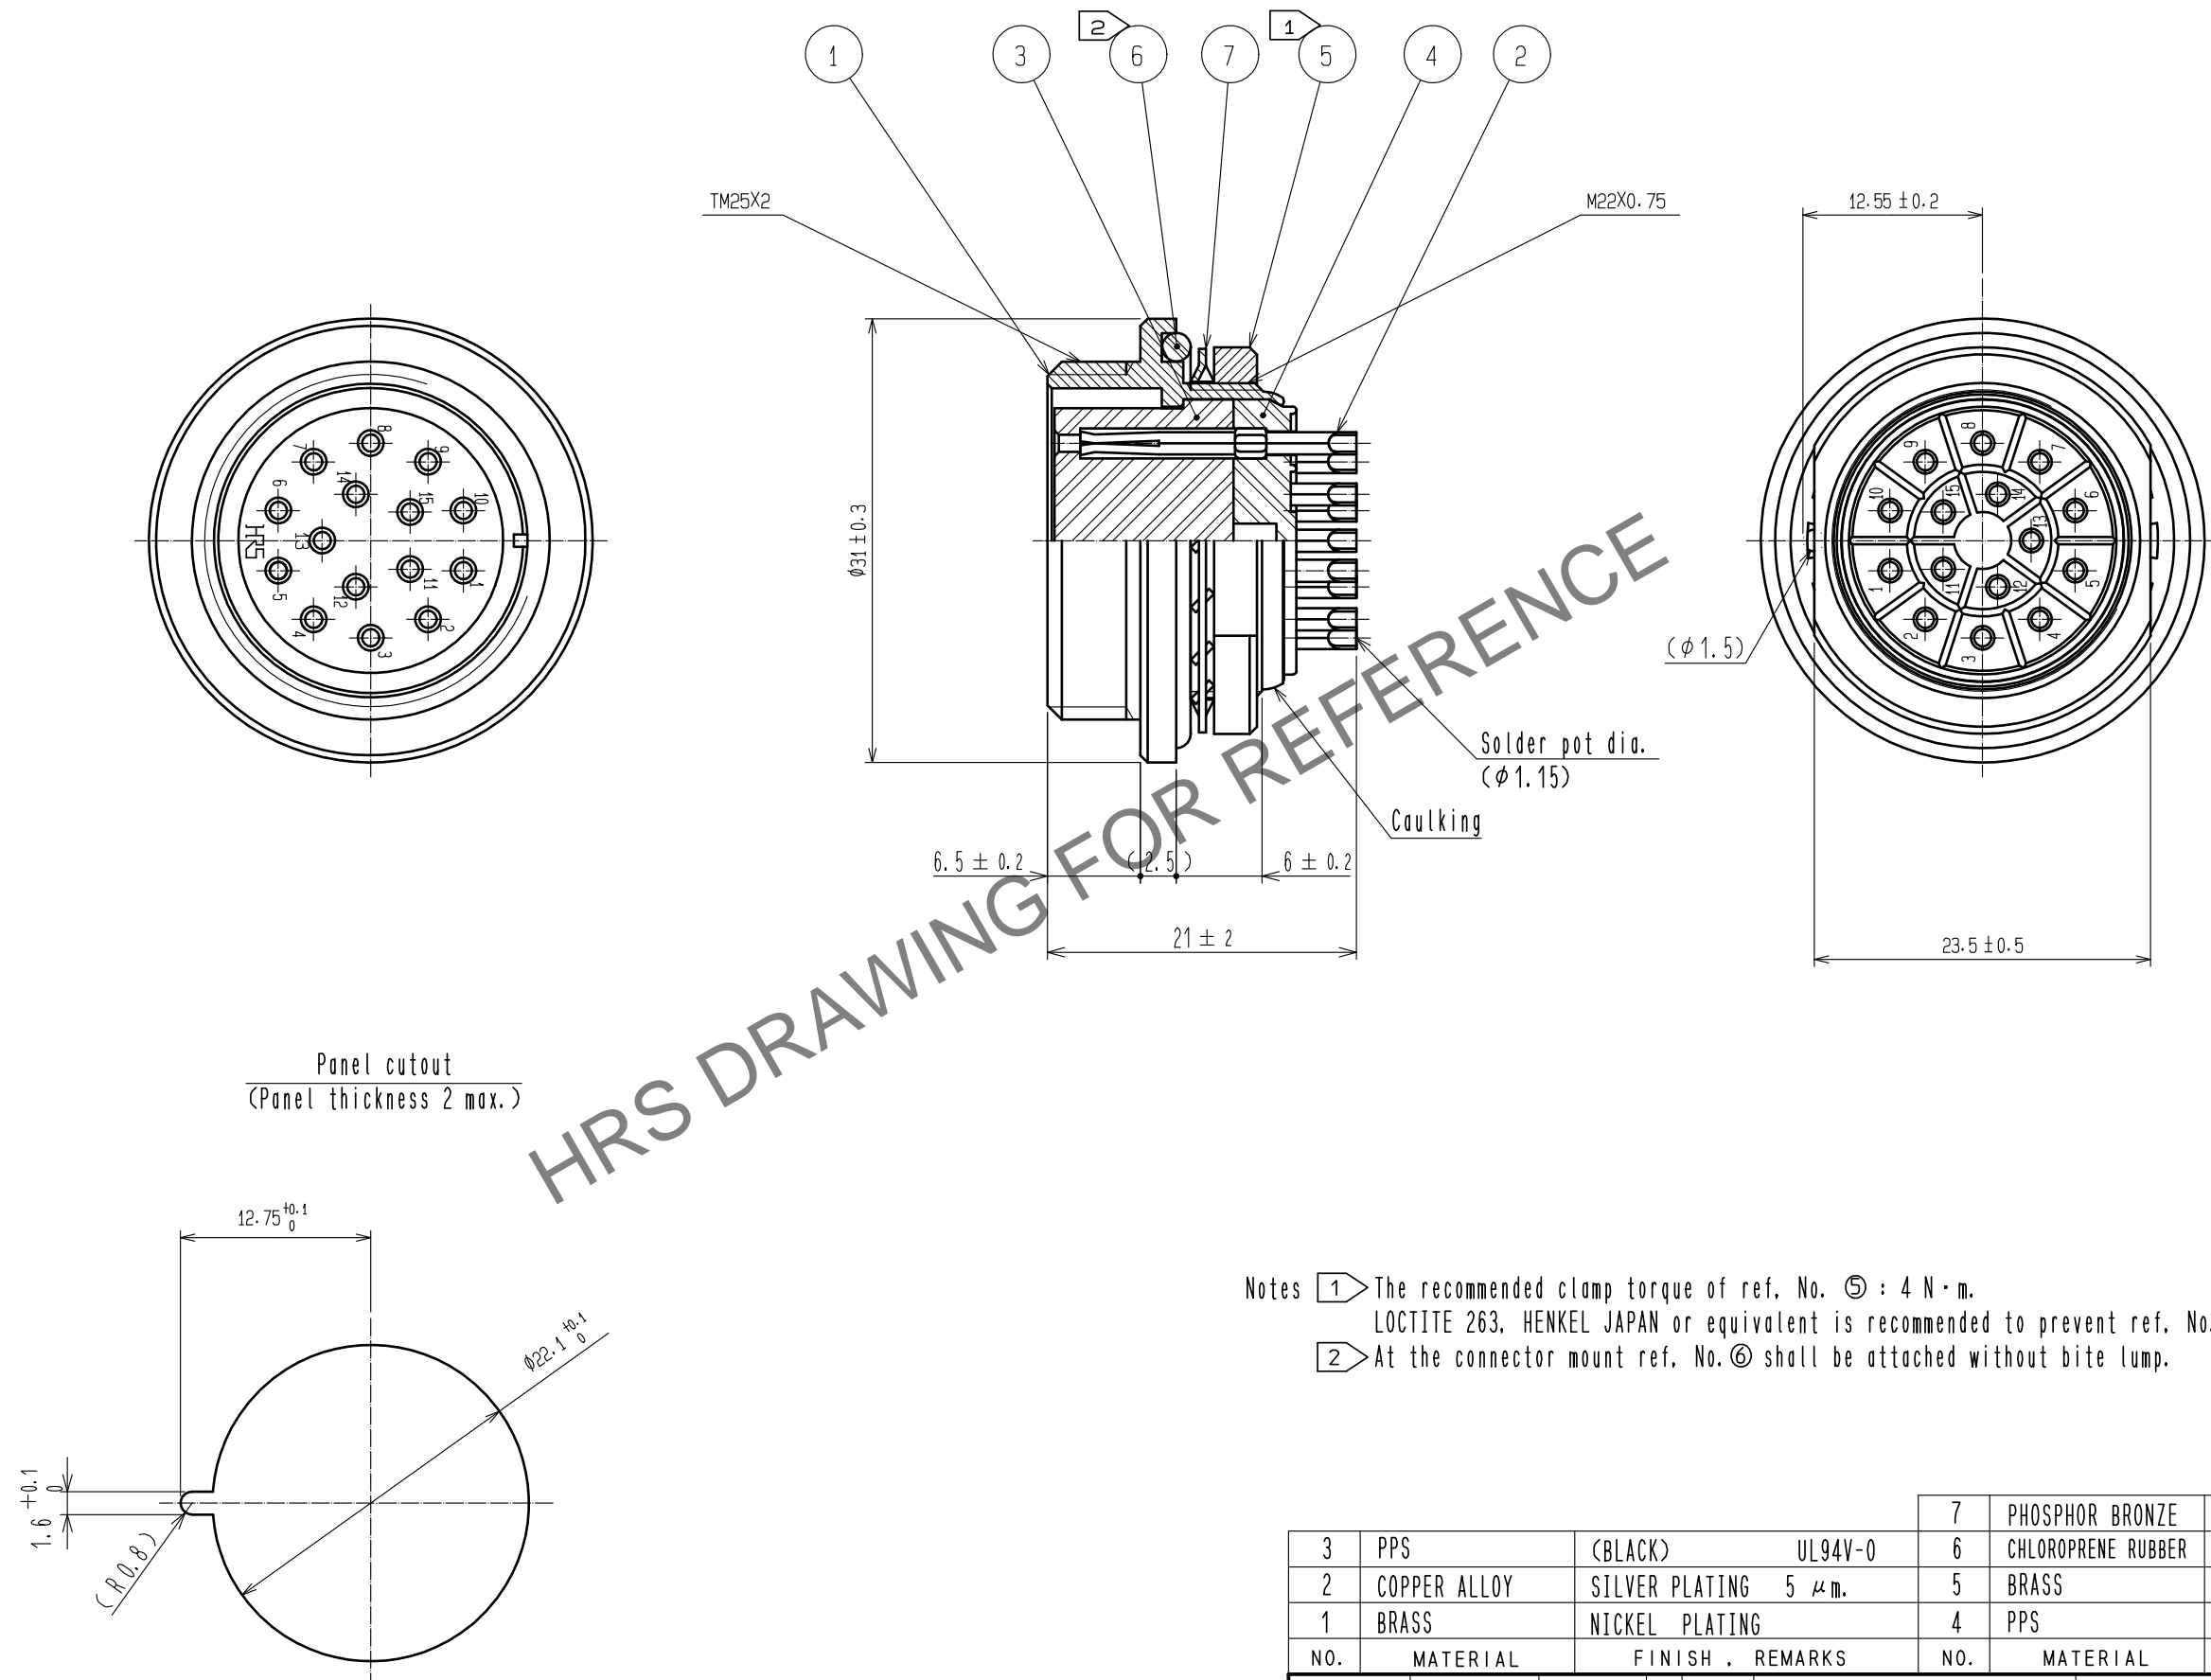


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Notes ① The recommended clamp torque of ref. No. ⑤ : 4 N·m.
LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑤ from loosening.
② At the connector mount ref. No.⑥ shall be attached without bite lump.

			7	PHOSPHOR BRONZE	NICKEL PLATING									
3	PPS	(BLACK) UL94V-0	6	CHLOROPRENE RUBBER	(BLACK)									
2	COPPER ALLOY	SILVER PLATING 5 μm.	5	BRASS	NICKEL PLATING									
1	BRASS	NICKEL PLATING	4	PPS	(BLACK) UL94V-0									
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS								
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO. . LTD.				APPROVED :HY. KOBAYASHI		18. 02. 22		DRAWING NO. EDC-003647-31-00						
				CHECKED :HY. KOBAYASHI		18. 02. 22		PART NO. RM21WTR-15S(31)						
				DESIGNED :HY. KISHI		18. 02. 22		CODE NO.						
				DRAWN :MK. INOUE		18. 02. 08		CL109-1447-3-31						
						1		1						