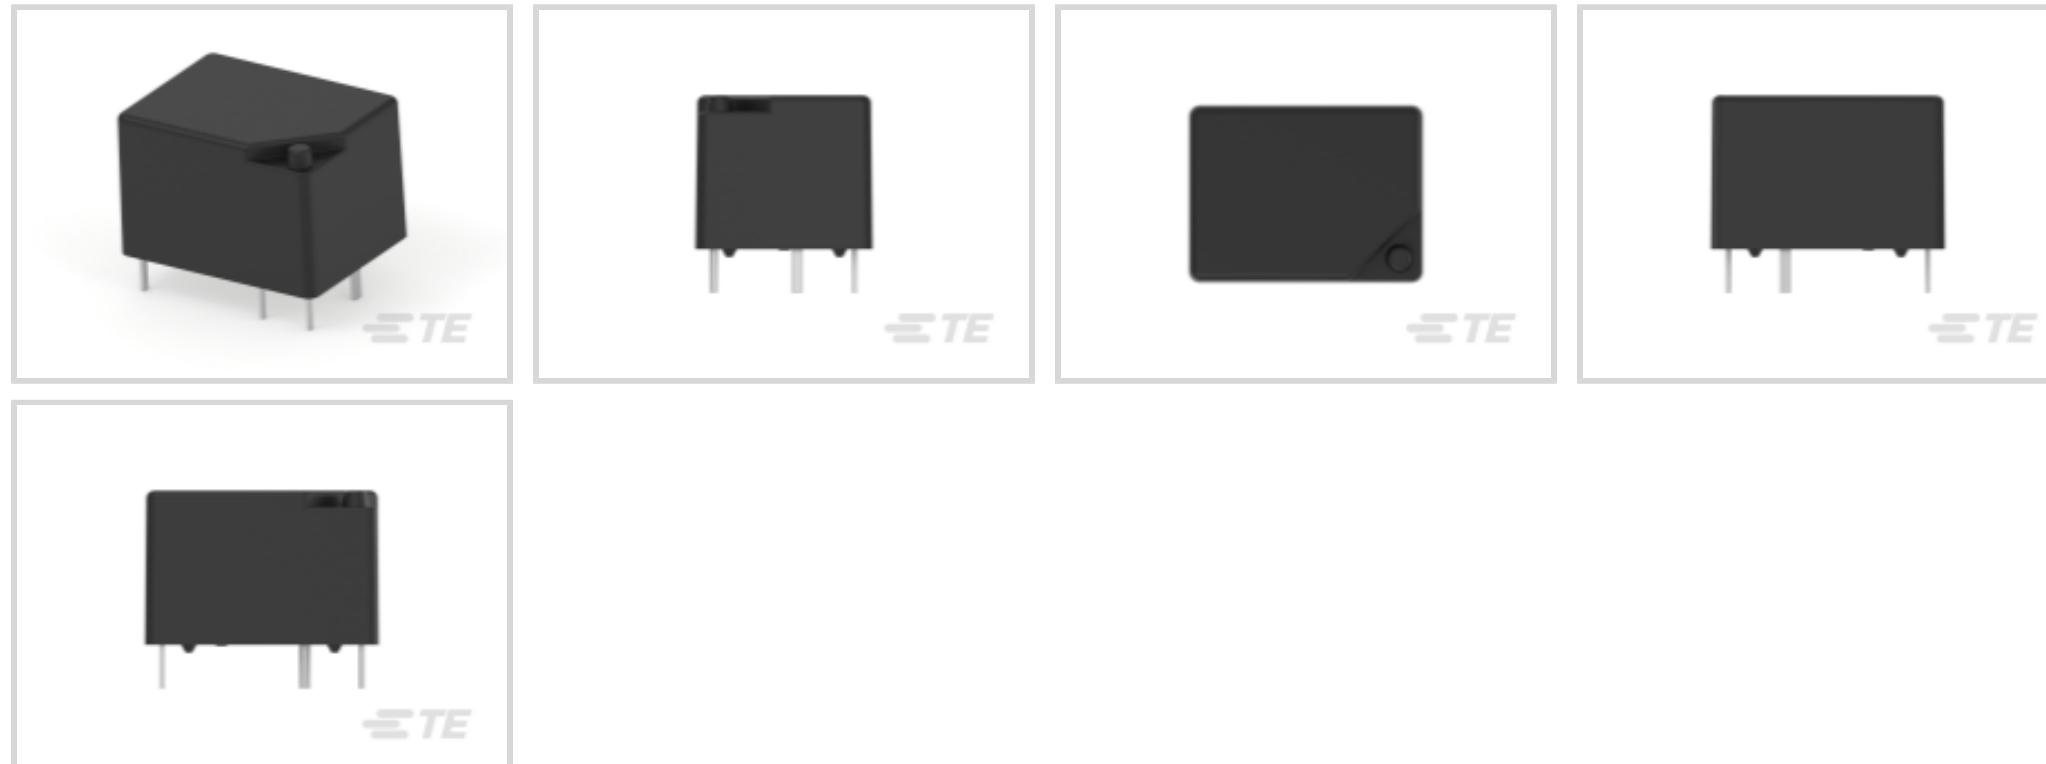


Relays & Contactors > Relays > Power Relays

Relay Type: **Standard**Coil Magnetic System: **Monostable**Coil Power Rating DC: **327 mW**Coil Resistance: **440 Ω**Coil Special Features: **Sensitive Version**

Features

Product Type Features

Relay Type	Standard
------------	----------

Configuration Features

Coil Special Features	Sensitive Version
-----------------------	-------------------

Contact Arrangement	1 Form C (CO)
---------------------	---------------

Contact Number of Poles	1
-------------------------	---

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1000 Vrms
---	-----------

Contact Limiting Making Current	12 A
---------------------------------	------

Contact Limiting Continuous Current	5 A
-------------------------------------	-----

Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
---	-----------

Coil Power Rating DC	327 mW
----------------------	--------

Coil Resistance	440 Ω
-----------------	-------

Coil Voltage Rating	12 VDC
---------------------	--------

Contact Current Rating	5 A
------------------------	-----

Contact Switching Voltage (Max)	400 VAC
---------------------------------	---------

Contact Voltage Rating	250 VAC
------------------------	---------

Body Features

Product Weight	9 g [.317 oz]
----------------	---------------

Contact Features

Contact Material	AgNi90/10
------------------	-----------

Termination Features

Relay Connection Type	PCB Termination
-----------------------	-----------------

Terminal Configuration	Solder Pins
------------------------	-------------

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	3.5 mm [.138 in]
---	------------------

Insulation Creepage Between Contact & Coil	3.5 mm [.138 in]
--	------------------

Product Width	16.2 mm [.637 in]
---------------	-------------------

Product Length	21.2 mm [.834 in]
----------------	-------------------

Product Height	14.9 mm [.586 in]
----------------	-------------------

Usage Conditions

Environmental Ambient Temperature (Max)	70 °C [158 °F]
---	----------------

Operating Temperature Range	-25 - 70 °C [-13 - 158 °F]
-----------------------------	----------------------------

Operation/Application

Actuating System	DC
------------------	----

Solder Process	Wave Solder
----------------	-------------

Coil Magnetic System	Monostable
----------------------	------------

Packaging Features

Packaging Method	Carton
------------------	--------

Other

Length Class (Mechanical)	20 - 25 mm
---------------------------	------------

Insulation Initial Dielectric Between Coil & Contact Class	4000 - 5000 V
--	---------------

Insulation Creepage Class	3 - 5.5 mm
---------------------------	------------

Insulation Clearance Class	2.5 - 4 mm
----------------------------	------------

Height Class (Mechanical)	14 - 15 mm
Coil Power Rating Class	300 - 400 mW
Width Class (Mechanical)	16 - 20 mm
Contact Current Class	2 - 5 A, 5 - 10 A

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com/compliance)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 260°C

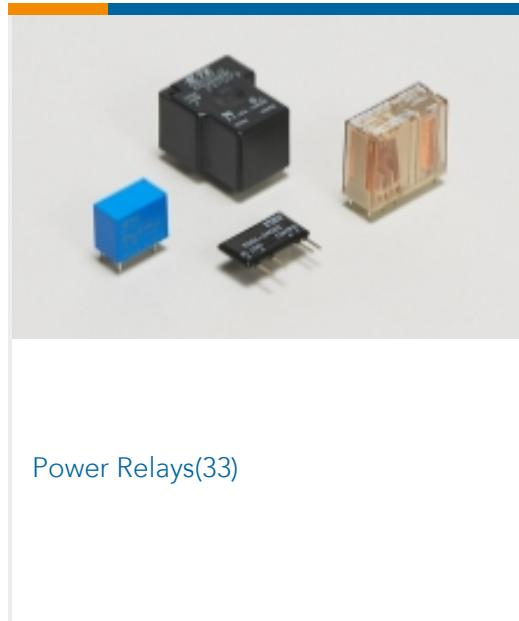
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

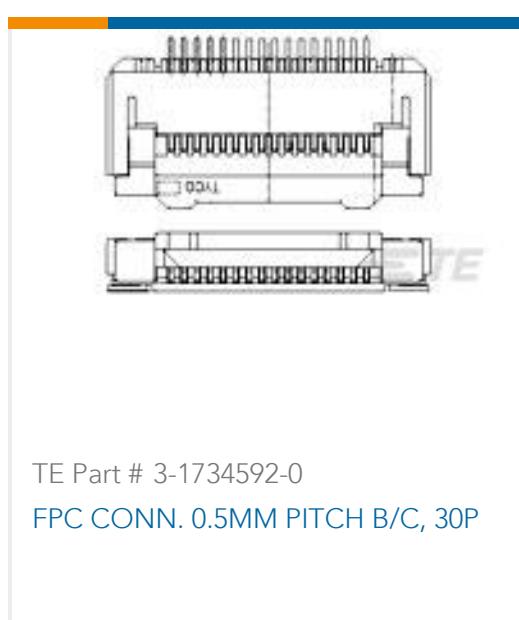
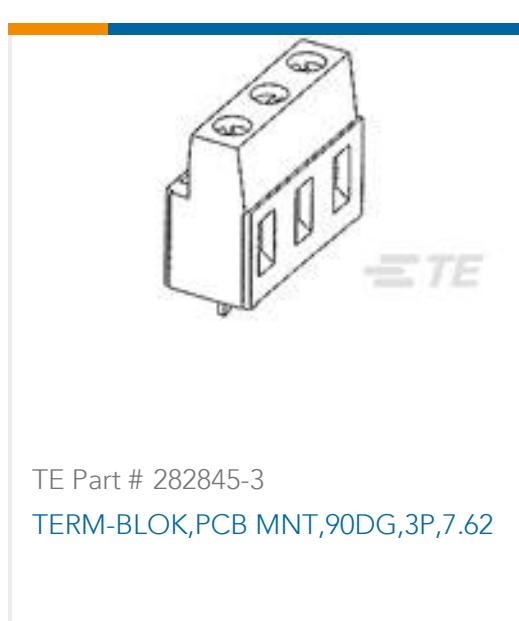
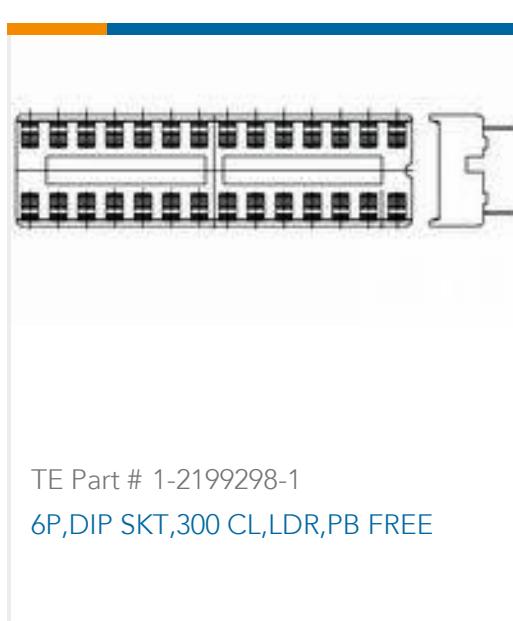


Also in the Series | SCHRACK V23148



Power Relays(33)

Customers Also Bought

TE Part # 3-1734592-0
FPC CONN. 0.5MM PITCH B/C, 30PTE Part # 66683-4
SOCKET CONTACT, 20 DFTE Part # 280380-2
8P MODU II SHRD HDR, RT ANG, 0.38
AUTE Part # 3-1393240-3
RT33L012TE Part # 282845-3
TERM-BLOK,PCB MNT,90DG,3P,7.62TE Part # 1-2199298-1
6P,DIP SKT,300 CL,LDR,PB FREETE Part # 2-2176342-9
CRGCQ 0805 47K 5%TE Part # 3-1393237-1
RTE24012FTE Part # 531230-4
SHUNT,.200 C/L, 2 POS, SNTE Part # 6-2176243-9
CRGS0603 5% 470K

Documents

CAD Files

[3D PDF](#)

3D

[Customer View Model](#)
[ENG_CVM_CVM_2-1393203-9_A.2d_dxf.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_2-1393203-9_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1393203-9_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Power PCB Relay U/UB

English

Product Specifications

[Definitions](#) [General Purpose Relays](#)

English