




RAST

TE Internal #: 3-829868-8

Standard Edge Connectors, Wire-to-Board, 8 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Gray, PBTP, Fully Loaded

[View on TE.com >](#)

Connectors > PCB Connectors > Card Edge Connectors > Standard Edge Connectors

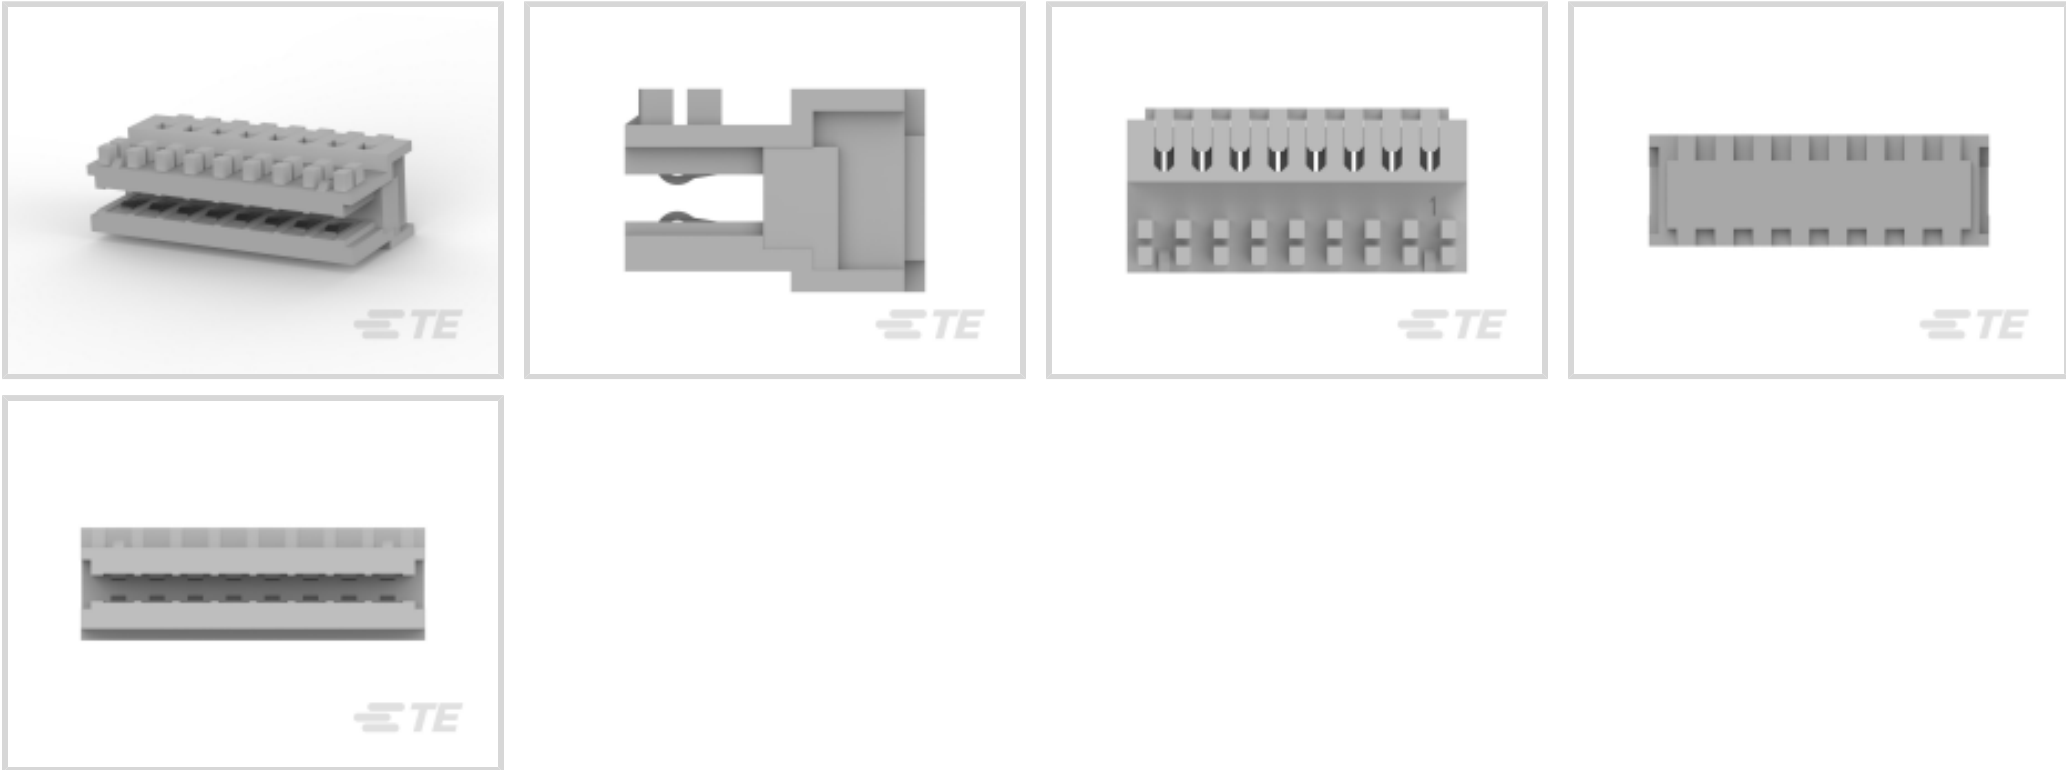

Connector System: **Wire-to-Board**
Number of Positions: **8**
Centerline (Pitch): **2.5 mm [.098 in]**
Termination Method to Wire & Cable: **Insulation Displacement (IDC)**
Number of Rows: **1**

Features

Product Type Features

Connector System	Wire-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Card Entry Style	Side
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	8
Number of Rows	1
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Right Angle

Electrical Characteristics

Operating Voltage	63 VAC
-------------------	--------

Body Features

Primary Product Color	Gray
-----------------------	------



Contact Features

Contact Retention Within Housing	With
Contact Type	Socket
Contact Mating Area Plating Material Thickness	5 - 12 µm
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Tin Alloy
Contact Current Rating (Max)	2 A

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Mating Alignment Type	Keyed
Mating Retention	Without
Mating Alignment	With
PCB Mount Alignment	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Entry Configuration	Both Ends Open
Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	PBTP

Dimensions

Card Slot Depth	5 mm
Connector Height	7.35 mm[.29 in]
PCB Thickness (Recommended)	1.5 mm[.059 in]
Compatible Insulation Diameter Range	1.2 - 1.4 mm[.047 - .055 in]
Wire Size	.22 - .25 mm ²

Usage Conditions

Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Agency/Standards Products	UL
---	----



Packaging Features

Packaging Quantity	2240
Packaging Method	Carton

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

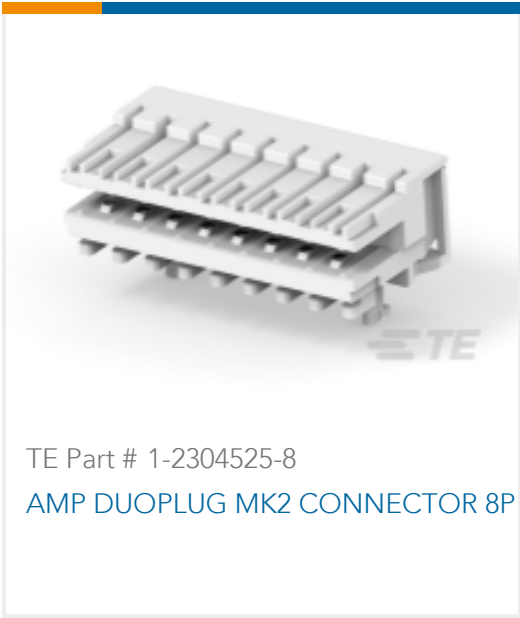

TE Part # 1-2304525-8
AMP DUOPLUG MK2 CONNECTOR 8P

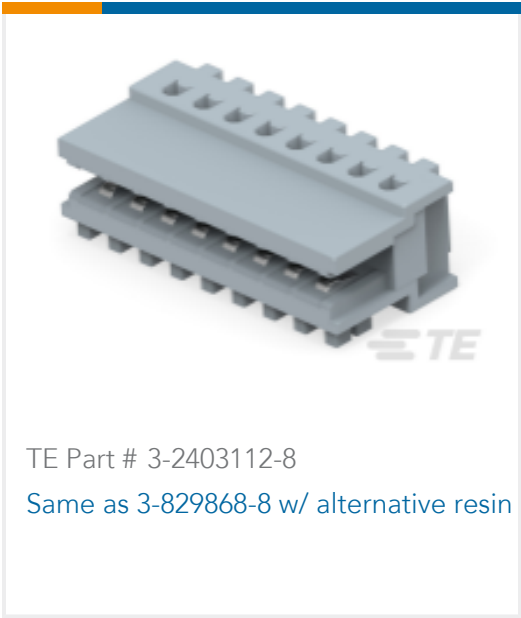

TE Part # 3-2403112-8
Same as 3-829868-8 w/ alternative resin

Customers Also Bought



TE Part # 353908-6
CT REC HSG 6P CRIMP TYPE WHITE

TE Part # 3-2176231-4
3522 240R 1% 3W

TE Part # 206036-3
RECEPT,SZ 17-16,CPC

TE Part # 3-829868-4
13X 4P FEDERLEI 2,5

TE Part # 1658526-5
609-1041LF FEM SOCKET,LEAD FREE

TE Part # 1622826-4
CRG0402 5% 10K

TE Part # 2-1376387-3
5mm B-T-W Conn. 6P(2row) HDR A

TE Part # 2-1376393-3
5MM POWER KEY 6P PLUG HSG BLUE

TE Part # 1745082-1
3 POS. TAB ASSY AMP SUPERSEAL
1.5 SRS.

TE Part # 3-1971817-4
4P,RAST 2.5 Tab Header,Ex- Locking,
THV

Documents

Product Drawings
DUOPLUG 2.5 FEDERLEI 8P

English

CAD Files

3D PDF

English

Customer View Model
ENG_CVM_3-829868-8_C1.2d_dxf.zip

English

Customer View Model
ENG_CVM_3-829868-8_C1.3d_igs.zip

English

Customer View Model
ENG_CVM_3-829868-8_C1.3d_stp.zip

English

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_3-829868-8_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-829868-8_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-829868-8_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[RAST Connector System Catalog](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English