



Connectors > Automotive Connectors > Automotive Housings



Connector System: **Wire-to-Board, Wire-to-Device, Wire-to-Wire**
Number of Positions: **3**
Connector & Housing Type: **Housing for Female Terminals**
Centerline (Pitch): **5 mm [.197 in]**
Sealable: **Yes**

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	125 VAC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	B

Contact Features

--	--



Contact Size	1.8mm
--------------	-------

Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Connector Height	27.6 mm[1.09 in]
Product Width	24.55 mm[.967 in]
Product Length	27.6 mm[1.09 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	1300
Packaging Method	Package

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant




China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

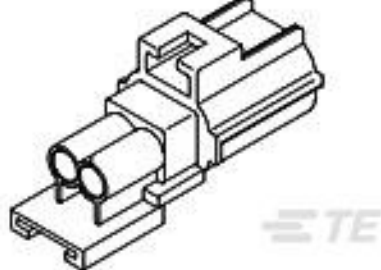 TE Part # 184141-1 WIRE SEAL,RUBBER,SENSOR,PURPLE, LIM	 TE Part # 184140-1 WIRE SEAL,RUBBER,SENSOR, ORANGE	 TE Part # 184030-3 RECPT, CONTACT 070, PTPPHBZ	 TE Part # 184095-2 RECPT, CONTACT .070, PTPPHBZ
 TE Part # 184139-1 WIRE SEAL,RUBBER,SENSOR,BLUE	 TE Part # 184373-2 CONTACT, RECEPTACLE, .070 TYPE	 TE Part # 184189-1 3 POS. END CAP HSG., KEY B	 TE Part # 184198-1 3 POS. END CAP ASSY., KEY B





TE Part # 184271-1
3 POS. PLUG ASSY W/CPA, KEY B

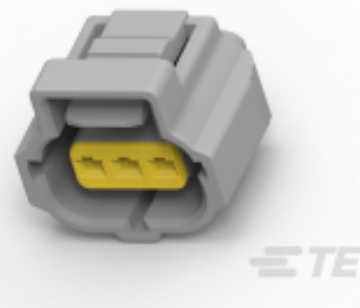

TE Part # 184435-1
1 X 3 PLUG ASSY KEY A-C4



TE Part # 184030-1
RECPT, CONTACT 070, AUPHBZ



TE Part # 184095-1
RECPT, CONTACT .070, AUPHBZ

TE Part # 2-184095-1
RECPT, CONTACT .070, AUPHBZ




TE Part # 184373-1
CONTACT, RECEPTACLE, .070 TYPE

Also in the Series | Sealed Sensor Connector SSC System



Automotive Connector Caps & Covers (5)

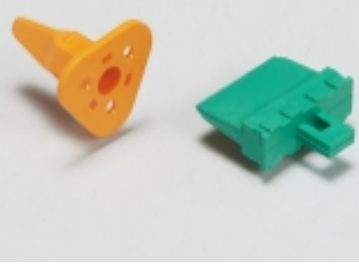

Automotive Connector Locks & Position Assurance (5)



Automotive Housings (144)



Automotive Terminals (4)



Connector Seals & Cavity Plugs (3)



Insertion & Extraction Tools (1)



Other Automotive Connector Accessories (2)

Customers Also Bought




TE Part # 179631-1
DIAGNOSTIC PLUG HSG 16P NARU.




TE Part # 2005154-1
025 TAB CONTACT(S)



TE Part # 2278584-1
67 POS,MIXED,REC HSG,ASSY, SEALED TYPE180

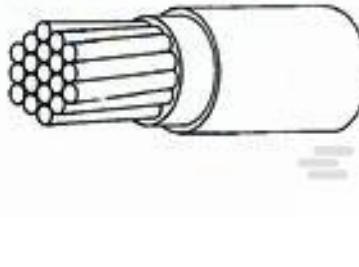

TE Part # 2820323006
44A0111-22-2

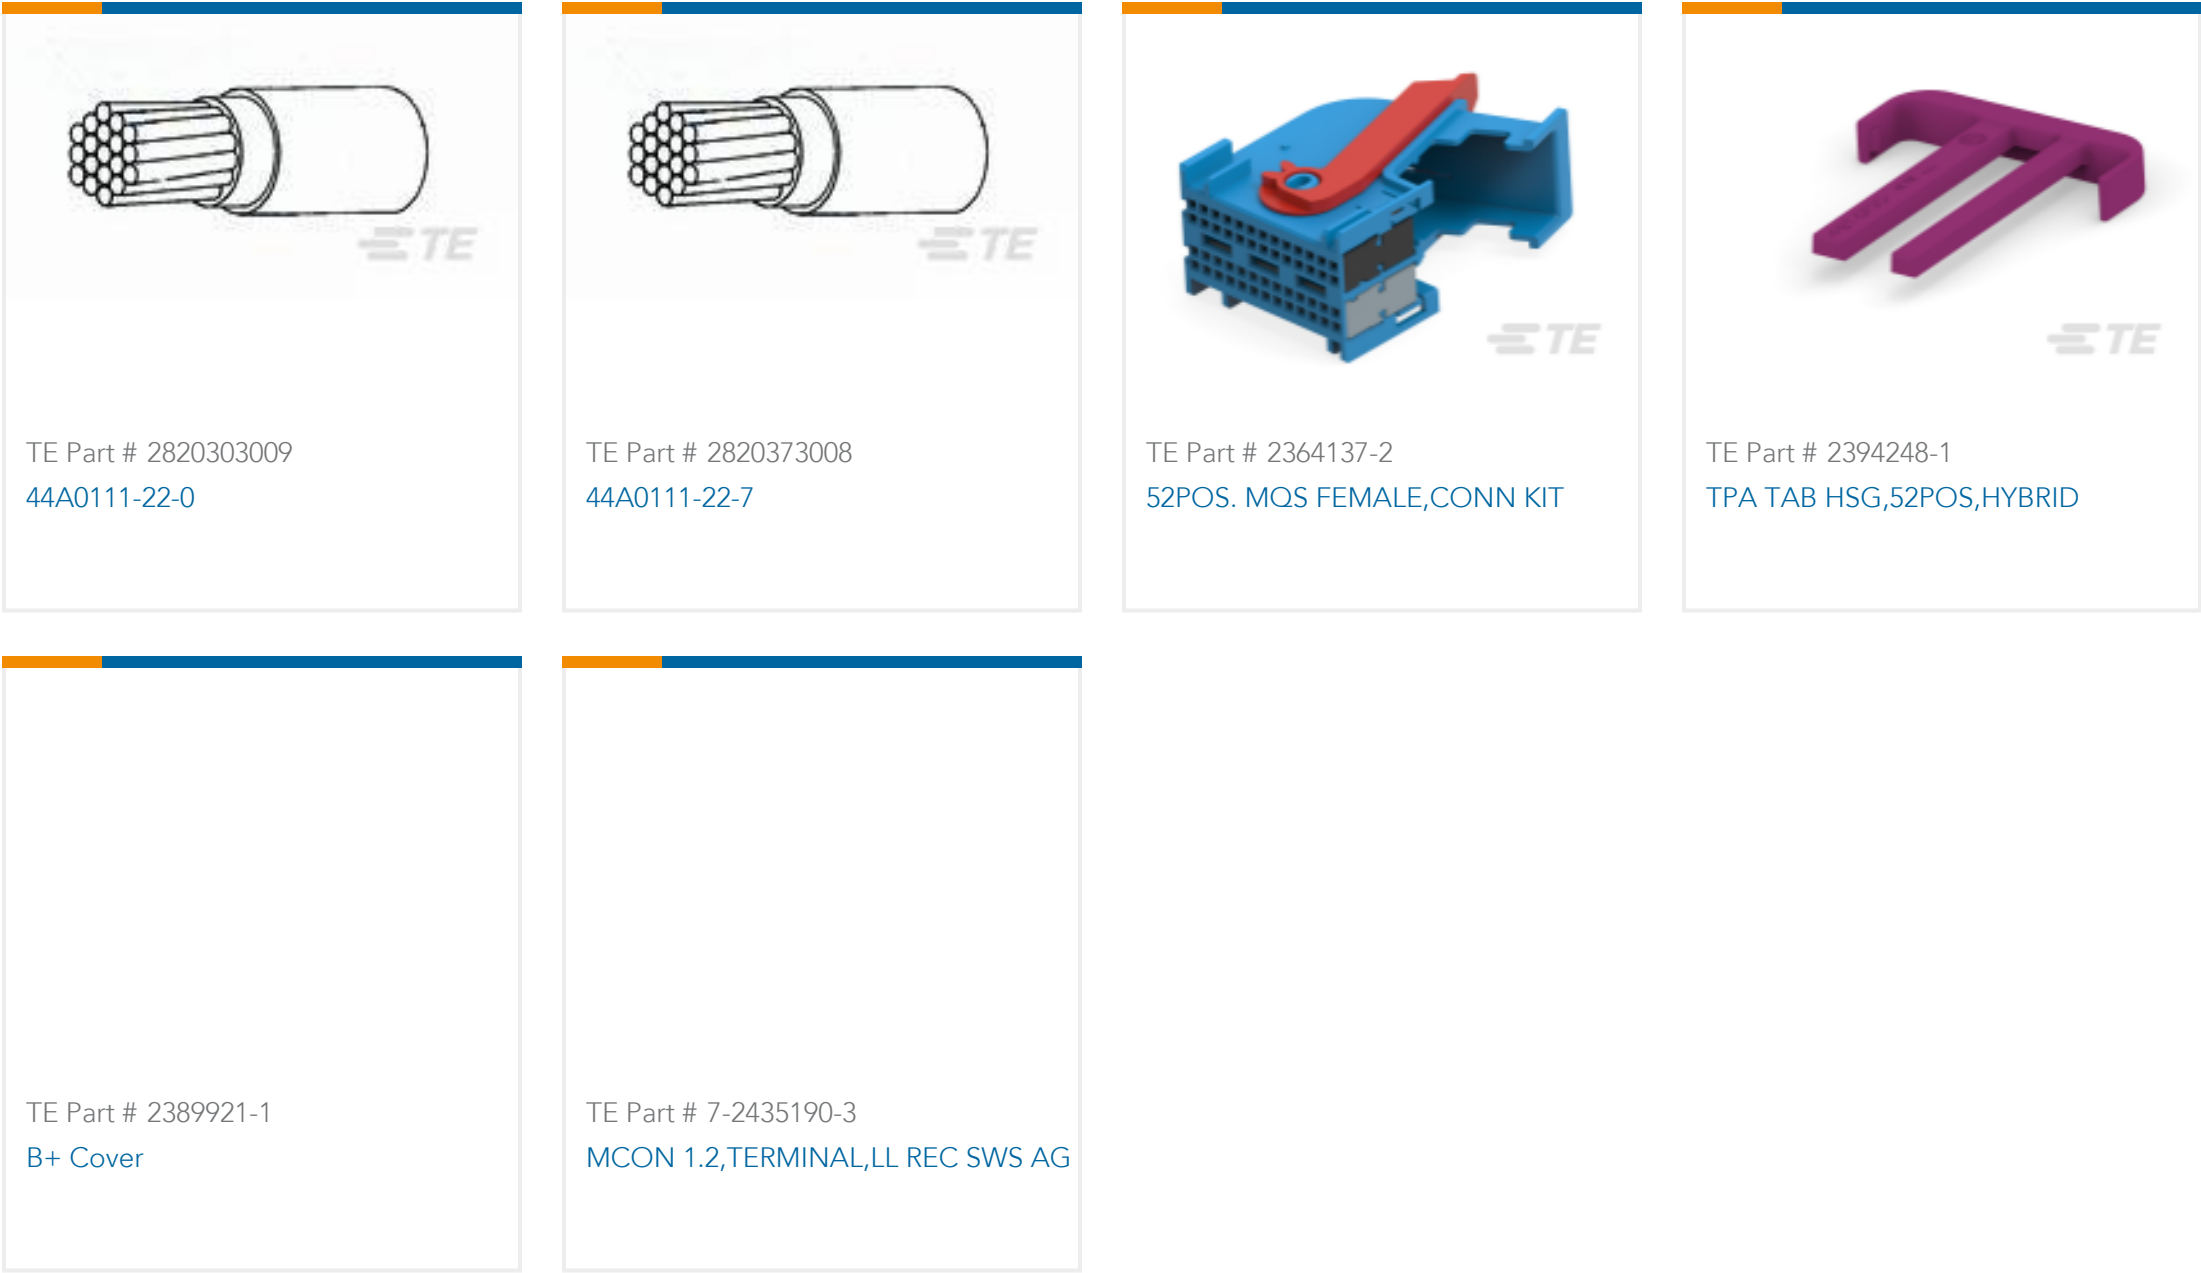

Documents

Product Drawings
3 POS. PLUG ASSY, KEY B

English

CAD Files
3D PDF
English
Customer View Model
ENG_CVM_184034-1_E.2d_dxf.zip

English
Customer View Model
ENG_CVM_184034-1_E.3d_igs.zip
English
Customer View Model
ENG_CVM_184034-1_E.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications
Application Specification

English

Instruction Sheets
Instruction Sheet (U.S.)
English
Positioning the Double Lock Plate
English

184034-1

Housing for Female Terminals, Wire-to-Device / Wire-to-Wire / Wire-to-Board, 3
Position, .197 in [5 mm] Centerline, Sealed Sensor Connector SSC System

