




Connectors > Automotive Connectors > Automotive Housings > MULTILOCK, CONNECTOR HOUSING

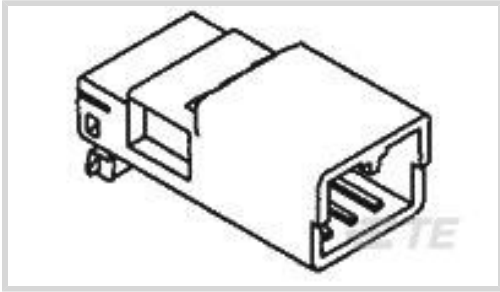

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Connector & Housing Type: **Housing for Male Terminals**

Centerline (Pitch): **2.5 mm [.098 in]**

Sealable: **No**

[All MULTILOCK, CONNECTOR HOUSING \(386\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	No
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	4
Number of Rows	1

Electrical Characteristics

Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Contact Features

Contact Size	1mm
--------------	-----



Contact Type	Tab
Mating Tab Width	1 mm[.039 in]

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT
Centerline (Pitch)	2.5 mm[.098 in]

Dimensions

Connector Height	11.4 mm[.449 in]
Product Width	13.5 mm[.531 in]
Product Length	29.1 mm[1.146 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F]
Operating Temperature Range	-30 - 105 °C[-22 - 221 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>




EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

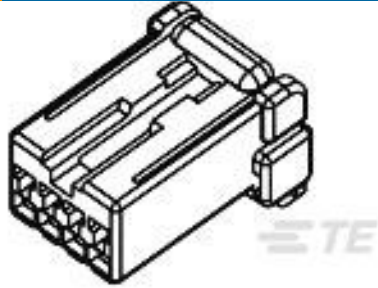

TE Part # 174966-2
040 MLC PLUG HSG 4P BLACK

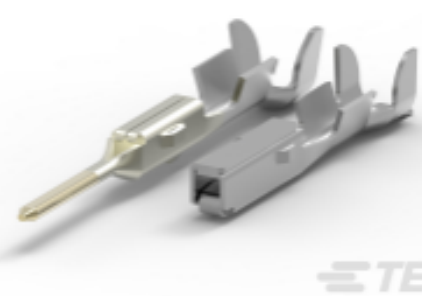

TE Part # CAT-M9194-T273
MULTILOCK, RECEPTACLE AND TAB

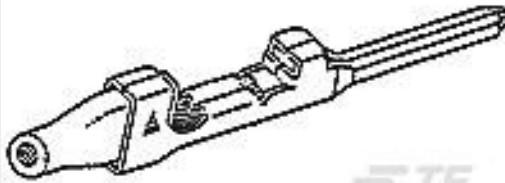


TE Part # 345164-2
040 SERIES TAB, R.R.

Also in the Series | Multilock Connector System



Automotive Connector Caps & Covers (10)

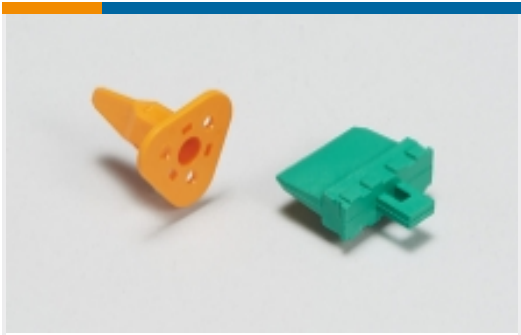

Automotive Connector Locks & Position Assurance(3)



Automotive Housings(439)



Automotive Terminals(115)




Connector Seals & Cavity Plugs(2)



Insertion & Extraction Tools(6)



Other Automotive Connector Accessories(12)

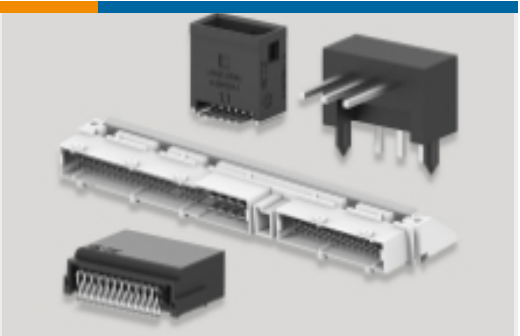


PCB Headers & Receptacles(140)

Customers Also Bought



TE Part # 292156-3
CT RELAY HDR ASSY FREE HANGING

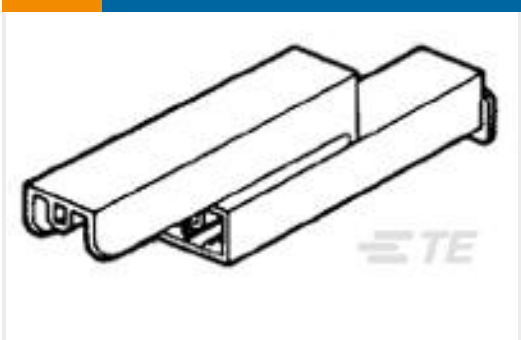

TE Part # 174712-1
PL 187 (4.8 MM) HOUSING RECEPTACLE



TE Part # 60529-2
187 FASTON REC 20-16 AWG TPBR



TE Part # 175178-1
PL EX 250 REC TERMINAL-FLAG 12-10 PTPB




TE Part # 61549-1
110 FASTON FLAG REC 22-16 AWG TPBR



TE Part # D34914-000
V4-0.8-0-SP-SM



TE Part # EM7501-000
SWFR-X4 Heat Shrink Tubing

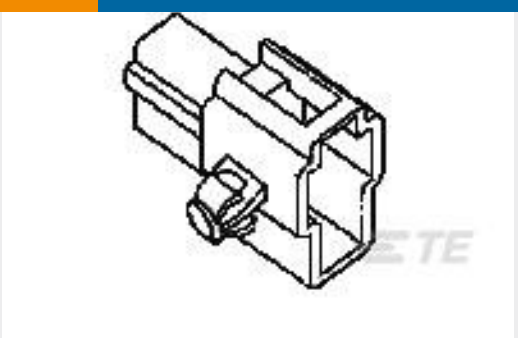

TE Part # 172383-2
FF 250 REC HSG 2P NYLON BLCAK P /M



TE Part # A85745-000
V4-0.6-0-SP

Documents



Product Drawings

040 MLC CAP HSG 4P BLACK

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_174967-2_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_174967-2_B.3d_igs.zip

English

Customer View Model

ENG_CVM_174967-2_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

MULTILOCK Connector System

English

Product Specifications

Product Specification

Japanese

040 Series Multi-Lock Connector wire to wire type

Japanese

Product Specification

Japanese

040 Series Multi-Lock Connector wire to wire type

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

English

040 SERIES MULTI-LOCK CONNECTOR

English