



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through & Pluggable**
Modular Terminal Block Product Type: **Screw Clamp Terminal Block**
Primary Product Color: **Gray**
Product Spacing: **6 mm [.236 in]**
Number of Positions: **4**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	A3-B3
Number of Levels	1
Number of Circuits	1
Block Function	Feed-Through & Pluggable
Number of Positions	4

Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (CSA)	28 A
Power Loss	1 W
Short-Time Withstanding Current Rating @ 1s	480 A
Voltage Rating (IEC)	800 V
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	300 V



Voltage Rating (CSA)	300 V
Dielectric Withstanding Voltage (Max)	2200 V
Current Rating (UL)	28 A
Current Rating (IEC)	29 A

Body Features

Product Weight	12.5 g[.496 oz]
Primary Product Color	Gray

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Screw Clamp	24 - 16 AWG
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	.22 - 4 mm ²
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	.22 - 4 mm ²
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	24 - 10 AWG
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	24 - 10 AWG
Wire Stripping Length	10.5 mm[.413 in]
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	.2 - 1.5 mm ²
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	.22 - 1.5 mm ²
Tool Size	3.5 mm[.138 in]
Product Depth	47.4 mm
Product Length	80.3 mm
Product Height	80.3 mm
Product Spacing	6 mm[.236 in]

Usage Conditions

Installation Temperature Range	-5 - 40 °C[23 - 104 °F]
Operating Temperature Range	-55 - 110 °C[-67 - 230 °F]

Industry Standards

IP Rating	IP20
-----------	------



UL Flammability Rating

UL 94V-0

Product Compliance

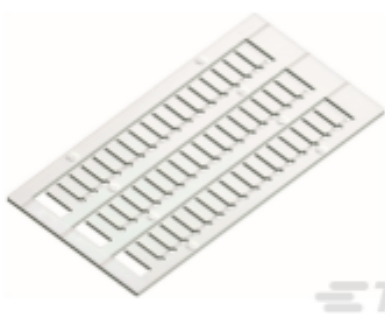
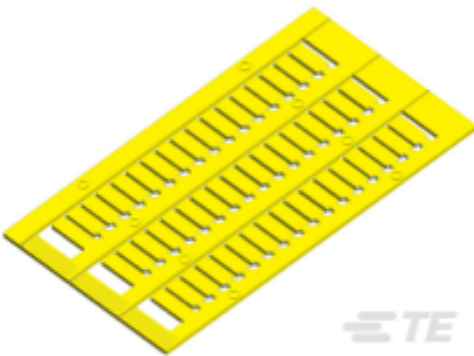
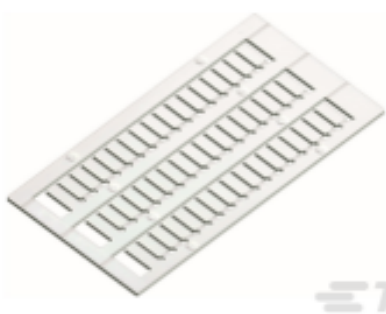
For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

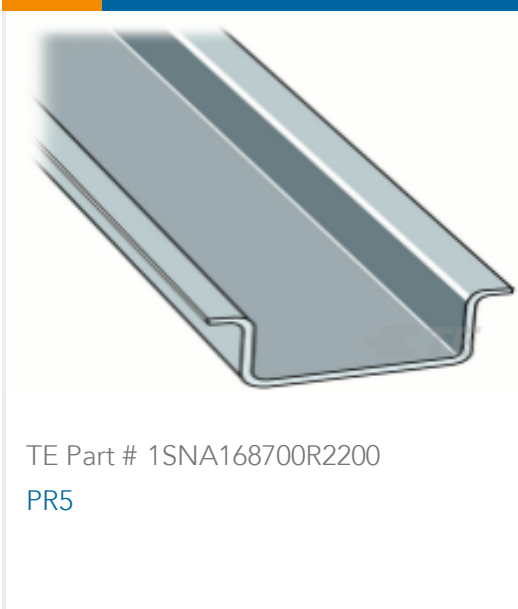
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

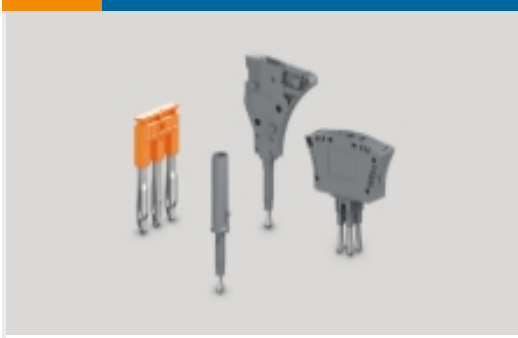
Compatible Parts

 TE Part # 1SNK140000R0000 MC512	 TE Part # 1SNK140004R0000 MC512-YL	 TE Part # 1SNK150000R0000 MC612	TE Part # 1SNK805715R0000 CDS4-E
--	---	--	---



 TE Part # 1SNK806714R0000 CDS4-R1	 TE Part # 1SNK900001R0000 BAM4	 TE Part # 1SNK900002R0000 BAZ1	 TE Part # 1SNK900105R0000 ES-TC6
 TE Part # 1SNK900107R0000 CS-R3	 TE Part # 1SNK900205R0000 TP4	 TE Part # 1SNK900636R0000 COP-ZD	 TE Part # 1SNK900637R0000 VR-ZD
 TE Part # 1SNK906302R0000 JB6-2	 TE Part # 1SNK906303R0000 JB6-3	 TE Part # 1SNK906305R0000 JB6-5	 TE Part # 1SNA164800R0300 PR3.G2
 TE Part # 1SNA168500R1200 PR4	 TE Part # 1SNA168700R2200 PR5	 TE Part # 1SNA173220R0500 PR30	 TE Part # 1SNA174300R1700 PR3.Z2

Also in the Series | ENTRELEC SNK

 Modular Terminal Blocks(320)	 Terminal Block & Strip Conducting Accessories(67)	 Terminal Block & Strip Insulating Accessories(31)
---	---	--

Customers Also Bought



TE Part # 1SNK505210R0000
ZS4-D2

TE Part # 1SNK506150R0000
ZS6-PE

TE Part # 1SNK508310R0000
ZS10-ST

TE Part # 1SNK705010R0000
ZK2.5

TE Part # 1SNK900652R0000
SC-JB8-2

TE Part # 1SNK905302R0000
JB5-2

TE Part # 1SNA206680R1500
AJS9-BK

TE Part # 1SNK900658R0000
SC-JB8-4-OR

TE Part # 1SNK908902R0000
JB8-2-R1

TE Part # 1SNS320001Z0545
MODUL TCS-01

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK806013R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK806013R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK806013R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English



[ZDS4-22-R1](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)

[Essential Entrelec Terminal Blocks](#)

French

[Essential Entrelec Terminal Blocks](#)

English

[Essential Entrelec Terminal Blocks](#)

Japanese

[Agency Approvals](#)

[UL](#)

English