

2071556-6 ✓ ACTIVE


TE Internal #: 2071556-6

Power Relays, Standard, Monostable, 200 mW Coil Power Rating  
DC, 125 Ω Coil Resistance, UL Coil Insulation Class F, 5 VDC Coil  
Voltage

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays

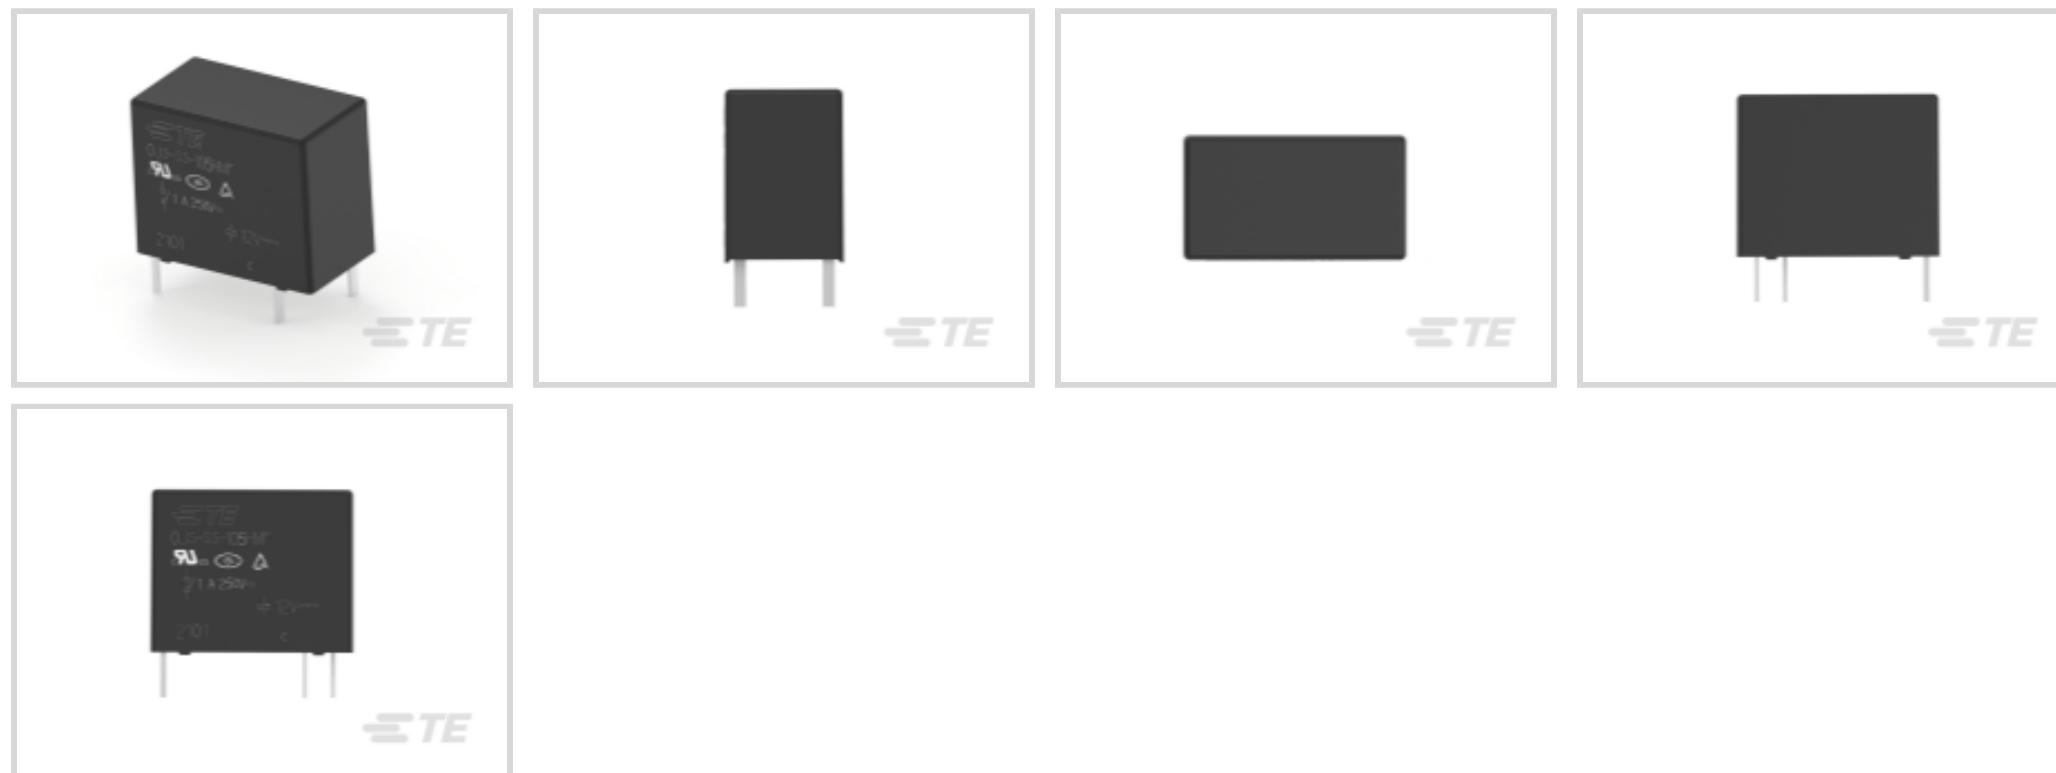

Relay Type: **Standard**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **200 mW**

Coil Resistance: **125 Ω**

Coil Special Features: **UL Coil Insulation Class F**

## Features

### Product Type Features

Relay Type	Standard
------------	----------

### Configuration Features

Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	1 Form A (SPST-NO)
Contact Number of Poles	1

### Electrical Characteristics

Output Current Rating	0 - 10 Arms
Coil Current	.04 A
Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Short-Time Current	10 A
Coil Power Rating	.2 W
Insulation Initial Dielectric Between Adjacent Contacts	750 Vrms
Insulation Initial Resistance	1000 MΩ
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms

Output Voltage (Max)	250 V
Contact Limiting Making Current	10 A
Contact Limiting Continuous Current	10 A
Output Voltage Rating (AC Relays)	0 - 250 Vrms
Output Current (Min)	.1 A
Input Voltage	0 - 5 VDC
Contact Limiting Breaking Current	10 A
Coil Power Rating DC	200 mW
Coil Resistance	125 Ω
Coil Voltage Rating	5 VDC
Contact Current Rating	10 A
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	250 VAC
Contact Voltage Rating	250 VAC

#### Body Features

Enclosure Type	Plastic Dust Cover
Primary Product Color	Black
Product Weight	5.8 g

#### Contact Features

Contact Plating Material	AgSnO
Contact Material	AgSnOInO

#### Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

#### Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

#### Dimensions

Insulation Clearance Between Contact & Coil	7 mm[.28 in]
Insulation Creepage Between Contact & Coil	11 mm[.43 in]
Product Width	10.2 mm[.401 in]
Product Length	18.2 mm[.716 in]
Product Height	14.8 mm[.582 in]

### Usage Conditions

Environmental Ambient Temperature (Max)	85 °C[185 °F]
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]

### Operation/Application

Actuating System	DC
Output Switching	Random
Output Current Type	AC
Coil Magnetic System	Monostable

### Packaging Features

Packaging Method	Tray/Box
------------------	----------

### Other

Length Class (Mechanical)	16 - 20 mm
Insulation Initial Dielectric Between Coil & Contact Class	3500 - 4000 V
Insulation Creepage Class	7 - 11 mm
Height Class (Mechanical)	14 - 15 mm
Coil Power Rating Class	150 - 200 mW
Environmental Ambient Temperature Class	70 - 85 °C
Insulation Clearance Class	7 - 11 mm
Width Class (Mechanical)	10 - 12 mm
Contact Current Class	10 A

### Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

## Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2071556-9  
OJS-SH-105HMF,00000


## Customers Also Bought



TE Part # T4110001051-000  
M12 Field Installable Unshielded



TE Part # T4141012041-000  
M12,REAR MOUNTING,FEMALE,A CODE,4P

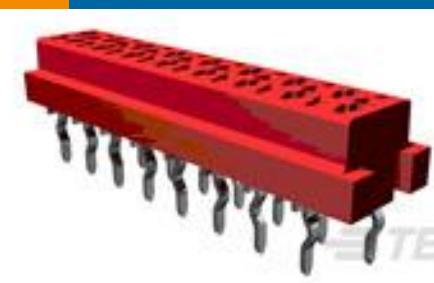

TE Part # 8-215079-2  
MICRO-MATCH FOB.12P



TE Part # 3-1437559-7  
MTL206N=(MSTL) SW TOG LOCKING



TE Part # 2081888-1  
EP-SMA,ADAPTER,STRAIGHT,27GHZ,  
F TO M



TE Part # 2081889-1  
EP-SMA,ADAPTER,STRAIGHT,27GHZ,  
F TO F



TE Part # 1825537-2  
MRJE2604



TE Part # 1SNA165488R2700  
MA2.5/5.P



## Documents

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2071556-6\\_A1.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2071556-6\\_A1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2071556-6\\_A1.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[OJS\\_10A/16A.STD](#)

English

[OJS Power Miniature PCB 10A / 16A Relays](#)

English

### Product Specifications

[Definitions General Purpose Relays](#)

English

### Agency Approvals

[UL](#)

English