




Heat Shrink Tubing > SST-FR Heat Shrink Tubing

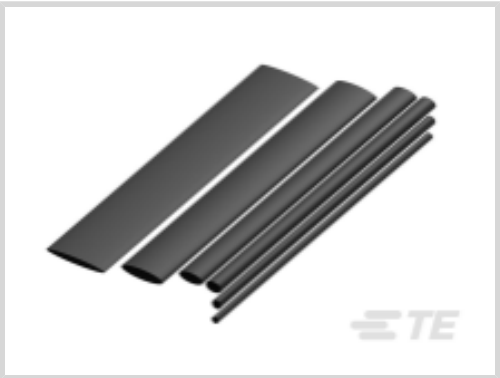

Primary Product Color: **Black**

Wall Type: **Single Wall**

Expanded Inside Diameter (Min): **43.18 mm [ 1.7 in ]**

Recovered Inside Diameter (Max): **12.7 mm [ .5 in ]**

Shrink Ratio: **3:1**

[All SST-FR Heat Shrink Tubing \(46\)](#)

Features

Product Type Features

Wall Type	Single Wall
-----------	-------------

Body Features

Fluid Type	De-Icing Fluid, Hydraulic Fluid, Lubricating Oil, Turbine Fuel
Primary Product Color	Black
Shrink Ratio	3:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Rigid

Dimensions

Expanded Inside Diameter (Min)	43.18 mm[1.7 in]
Recovered Inside Diameter (Max)	12.7 mm[.5 in]
Tubing Size Range	12.7 - 43.18 mm[.5 - 1.7 in]

Usage Conditions

Shrink Temperature (Min)	90 °C
Resistance Properties	Moisture
Tubing Flammability Type	Flame-Retardant



Operating Temperature Range	-55 - 110 °C
Recovery Temperature	121 °C

Operation/Application

Mechanical Resistance	Abrasion, Fluids, Moisture
-----------------------	----------------------------

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Piece
------------------	-------

Other

Meets Low Outgassing Requirements	No
Product Source	US

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2326489-1  
MODEL 105 TUNNEL OVEN, 36" ENTRY, STAND A

TE Part # 2394980-1  
MOD 105 TUN OVEN, 69" ENTRY, STANDARD

TE Part # 955018-000  
CLTEQ-M105-TUNNEL-OVEN

Also in the Series | RAYCHEM SST-SR

Heat Shrink Tubing(44)

Customers Also Bought

TE Part # 5747872-8  
15 PLUG SP/FMS INSRT

TE Part # DT04-08PA-CE09  
REC, 8P, BLK, E, XCAP, A

TE Part # 770582-1  
14P MINI UMNL PLUG HSG

TE Part # 5-103957-9  
2X10 MTE RCPT SR LATCH .100CL

TE Part # 87809-1  
MOD V RECP PLTD 30 AU

TE Part # 2-1625885-4  
1W SM M/OX 5% 15K

TE Part # YDTS26W15-35PNV001  
PLUG ASSY

TE Part # NB17002001  
DWP-125-1-0-STK

TE Part # 1-1757823-0  
AMPLIMITE,ASY,PLUG,STD,90,ZN,4,CT

TE Part # TRA9023NP  
OMNI,SB,Ph,902-928MHZ 3,NP PMT



Documents

Product Drawings

[SST-48-17/FR/97](#)

English

Datasheets & Catalog Pages

[Measuring\\_Single\\_Wall\\_Tubing](#)

English

[SST and SST-FR Pages from 9-1773447-9](#)

English

[Selecting\\_Correct\\_Tubing\\_1216](#)

English

Product Specifications

[Application Specification](#)

English