

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Knife-disconnect terminal block, nom. voltage: 500 V, nominal current: 20 A, 1 level, connection method: Push-in connection, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², mounting: NS 35/7,5, NS 35/15, color: blue

Your advantages

- The secure end position of the lever-type disconnect knife ensures that the switching states of the knife disconnect terminal blocks are permanently secured and are always clearly recognizable
- The circuits can be opened easily with a standard screwdriver
- Clear wiring, thanks to lateral conductor entry
- The compact design enables wiring in a confined space
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off

Commercial data

Item number	1088740
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE23
Product key	BE2331
GTIN	4055626889894
Weight per piece (including packing)	9.759 g
Weight per piece (excluding packing)	9.759 g
Customs tariff number	85369010
Country of origin	CN

PTV 4-MT BU - Knife-disconnect terminal block

1088740

<https://www.phoenixcontact.com/us/products/1088740>



Technical data

Product properties

Product type	Disconnect terminal block
Product family	PTV
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W

Connection data

Number of connections per level	2
Nominal cross section	4 mm ²

1 level

Stripping length	9 mm ... 11 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm ² ... 6 mm ²
Cross section AWG	24 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	24 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.2 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm ² ... 4 mm ²
Conductor cross-section flexible (2 conductors with the same cross-section, with TWIN ferrule and plastic sleeve)	0.5 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 2.5 mm ²
Nominal current	20 A
Maximum load current	20 A (with a 2.5 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	4 mm ²

1 level Connection cross sections directly pluggable

Conductor cross section rigid	0.75 mm ² ... 6 mm ²
-------------------------------	--

PTV 4-MT BU - Knife-disconnect terminal block

1088740

<https://www.phoenixcontact.com/us/products/1088740>



Conductor cross-section flexible (ferrule without plastic sleeve)	1.5 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm ² ... 4 mm ²

Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	63.3 mm
Depth	36.9 mm
Depth on NS 35/7,5	36.8 mm
Depth on NS 35/15	44.3 mm

Material specifications

Color	blue
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data	
Open side panel	Yes

Environmental and real-life conditions

Ambient conditions	
Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

PTV 4-MT BU - Knife-disconnect terminal block


1088740

<https://www.phoenixcontact.com/us/products/1088740>



Drawings

Circuit diagram

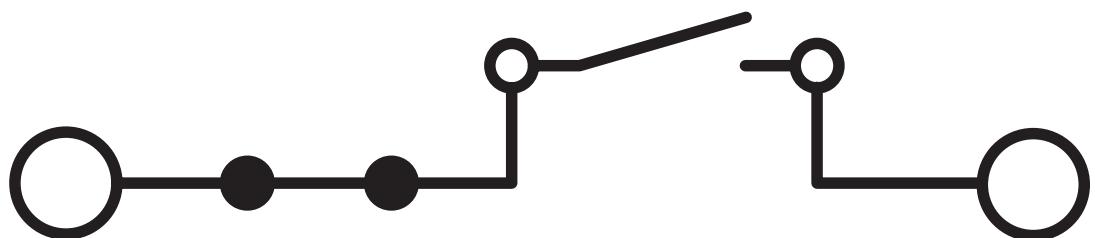

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1088740>

		Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B		300 V	16 A	26 - 10	-
Use group C		300 V	16 A	26 - 10	-
Use group D		600 V	5 A	26 - 10	-

	cULus Recognized
	Approval ID: E60425

CB Scheme	IECEE CB Scheme				
		Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
		500 V	20 A	-	0.2 - 6

	VDE Zeichengenehmigung
	Approval ID: 40056318

		Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
		500 V	20 A	-	0.2 - 6

	cULus Recognized
	Approval ID: E60425

PTV 4-MT BU - Knife-disconnect terminal block

1088740

<https://www.phoenixcontact.com/us/products/1088740>



Classifications

ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126
ECLASS-13.0	27250108

ETIM

ETIM 9.0	EC000902
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

Accessories

 Note: Applying some accessories below might limit this product.

FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/us/products/3030336>

Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red



 Max. current carrying capacity: 32 A

FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/us/products/3030242>

Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



 Max. current carrying capacity: 32 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/us/products/3030255>

Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red



Max. current carrying capacity: 32 A

FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/us/products/3030349>

Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



Max. current carrying capacity: 32 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/us/products/1008238>

Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red



Max. current carrying capacity: 32 A

FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/us/products/3030271>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red



Max. current carrying capacity: 32 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/us/products/3030365>

Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red



Max. current carrying capacity: 32 A

FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/us/products/3033715>

Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red



Max. current carrying capacity: 24 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/us/products/3001594>

Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



Max. current carrying capacity: 24 A

FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/us/products/3001595>

Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red



Max. current carrying capacity: 24 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/us/products/3001596>

Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



Max. current carrying capacity: 24 A

FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/us/products/3033716>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red



Max. current carrying capacity: 24 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/us/products/3033812>

Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red



Max. current carrying capacity: 24 A

FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/us/products/3036932>

Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue



Max. current carrying capacity: 32 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/us/products/3036945>

Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue



Max. current carrying capacity: 32 A

FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/us/products/3036958>

Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue



Max. current carrying capacity: 32 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/us/products/3036961>

Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue



Max. current carrying capacity: 32 A

FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/us/products/3032198>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue



Max. current carrying capacity: 32 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/us/products/3032208>

Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue



Max. current carrying capacity: 32 A

FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/us/products/3032211>

Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue



Max. current carrying capacity: 32 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

RB ST (2,5/4)-1,5/S - Reducing bridge

3214356

<https://www.phoenixcontact.com/us/products/3214356>

Reducing bridge, pitch: 6.7 mm, number of positions: 2, length: 23 mm, color: red



Max. current carrying capacity: 24 A

RB ST 6-(2,5/4) - Reducing bridge

3030860

<https://www.phoenixcontact.com/us/products/3030860>

Reducing bridge, pitch: 9 mm, number of positions: 2, length: 30 mm, color: red



Max. current carrying capacity: 35 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

RB ST 10-(2,5/4) - Reducing bridge

3030873

<https://www.phoenixcontact.com/us/products/3030873>

Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red



Max. current carrying capacity: 35 A

RB ST 16-(2,5/4) - Reducing bridge

3030886

<https://www.phoenixcontact.com/us/products/3030886>

Reducing bridge, pitch: 11 mm, number of positions: 2, length: 37 mm, color: red



Max. current carrying capacity: 35 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

RB ST 35-(2,5/4) - Reducing bridge

3030899

<https://www.phoenixcontact.com/us/products/3030899>

Reducing bridge, pitch: 11 mm, number of positions: 2, color: red



Max. current carrying capacity: 35 A

RB ST (2,5/4)-1,5 - Reducing bridge

3038943

<https://www.phoenixcontact.com/us/products/3038943>

Reducing bridge, pitch: 7.1 mm, number of positions: 2, length: 23 mm, color: red



Max. current carrying capacity: 24 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

RB UT 6-ST(2,5/4) - Reducing bridge

3047264

<https://www.phoenixcontact.com/us/products/3047264>

Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 33 mm, color: red



Max. current carrying capacity: 35 A

RB UT 35-ST(2,5/4) - Reducing bridge

3047280

<https://www.phoenixcontact.com/us/products/3047280>

Reducing bridge, pitch: 10.8 mm, number of positions: 2, color: red



Max. current carrying capacity: 40 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

RB UT 10-ST(2,5/4) - Reducing bridge

3047086

<https://www.phoenixcontact.com/us/products/3047086>

Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 33 mm, color: red



Max. current carrying capacity: 40 A

RB UT 16-ST(2,5/4) - Reducing bridge

3047099

<https://www.phoenixcontact.com/us/products/3047099>

Reducing bridge, pitch: 11 mm, number of positions: 2, length: 41 mm, color: red



Max. current carrying capacity: 40 A

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

D-PTV 2,5/4-MT - End cover

1079918

<https://www.phoenixcontact.com/us/products/1079918>

End cover, depth: 29.1 mm, width: 2.2 mm, height: 63.3 mm, color: gray



DS-PTV 2,5/4-MT - Cover segment

1083620

<https://www.phoenixcontact.com/us/products/1083620>

Cover segment, depth: 33.1 mm, width: 0.8 mm, height: 22 mm, color: gray



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

S-MT - Switching lock

3247954

<https://www.phoenixcontact.com/us/products/3247954>

Switching lock, depth: 23.1 mm, width: 3.5 mm, height: 10.5 mm, color: white



WS PT 4 - Warning label

1029563

<https://www.phoenixcontact.com/us/products/1029563>

Warning label, 5-section, yellow/black, labeled: Lightning flash, mounting type: plug in, for terminal block width: 6.2 mm



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

LPS-6/E - Service connector

3270540

<https://www.phoenixcontact.com/us/products/3270540>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

LPS-6 - Service connector

3270541

<https://www.phoenixcontact.com/us/products/3270541>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

LPO 4/E - Pick-off plug

3270519

<https://www.phoenixcontact.com/us/products/3270519>

Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray



LPO 4 - Pick-off plug

3270522

<https://www.phoenixcontact.com/us/products/3270522>

Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/ 7,5 PERFORATED 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERFORATED 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>

DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/us/products/3035975>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/us/products/3035974>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/us/products/3035977>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/us/products/3035976>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/us/products/3035978>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/us/products/3035980>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/us/products/3035982>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/us/products/3035979>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/us/products/3035981>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/us/products/3035983>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PS-6 - Test plug

3030996

<https://www.phoenixcontact.com/us/products/3030996>

Test plug, Modular test plug, number of positions: 1, color: red



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

PS-6/2,3MM RD - Test plug

3038736

<https://www.phoenixcontact.com/us/products/3038736>

Test plug, number of positions: 1, color: red



SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

<https://www.phoenixcontact.com/us/products/1213144>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 6 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

CRIMPFOX CENTRUS 10S - Crimping pliers

1213154

<https://www.phoenixcontact.com/us/products/1213154>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 10 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

CRIMPFOX CENTRUS 6H - Crimping pliers

1213146

<https://www.phoenixcontact.com/us/products/1213146>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 6 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

CRIMPFOX CENTRUS 10H - Crimping pliers

1213156

<https://www.phoenixcontact.com/us/products/1213156>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 10 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

CRIMPFOX 10S - Crimping pliers

1212045

<https://www.phoenixcontact.com/us/products/1212045>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm² ... 10 mm², unlockable pressure lock, lateral entry

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

CRIMPFOX 6H - Crimping pliers

1212046

<https://www.phoenixcontact.com/us/products/1212046>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm² ... 6 mm², unlockable pressure lock, lateral entry

CRIMPFOX 2,5-M - Crimping pliers

1212719

<https://www.phoenixcontact.com/us/products/1212719>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 2.5 mm², lateral entry, trapezoidal crimp

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

CRIMPFOX 6-M - Crimping pliers

1212720

<https://www.phoenixcontact.com/us/products/1212720>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

CRIMPFOX 6T - Crimping pliers

1212037

<https://www.phoenixcontact.com/us/products/1212037>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6 mm², lateral entry, trapezoidal crimp



CRIMPFOX 6T-F - Crimping pliers

1212038

<https://www.phoenixcontact.com/us/products/1212038>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6 mm², front entry, trapezoidal crimp



PTV 4-MT BU - Knife-disconnect terminal block



1088740

<https://www.phoenixcontact.com/us/products/1088740>

CRIMPFOX 6S-F - Crimping pliers

1212043

<https://www.phoenixcontact.com/us/products/1212043>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.5 mm² ... 6 mm², front entry, square crimp



CRIMPFOX-M - Crimping pliers

1212072

<https://www.phoenixcontact.com/us/products/1212072>

Basic pliers, for accommodating dies for a wide range of type of contacts



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com