1-2177063-1 ✓ ACTIVE

AMP+ HVP800
TE Internal #: 1-2177063-1

Housing for Male Terminals, Wire-to-Wire, 3 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800
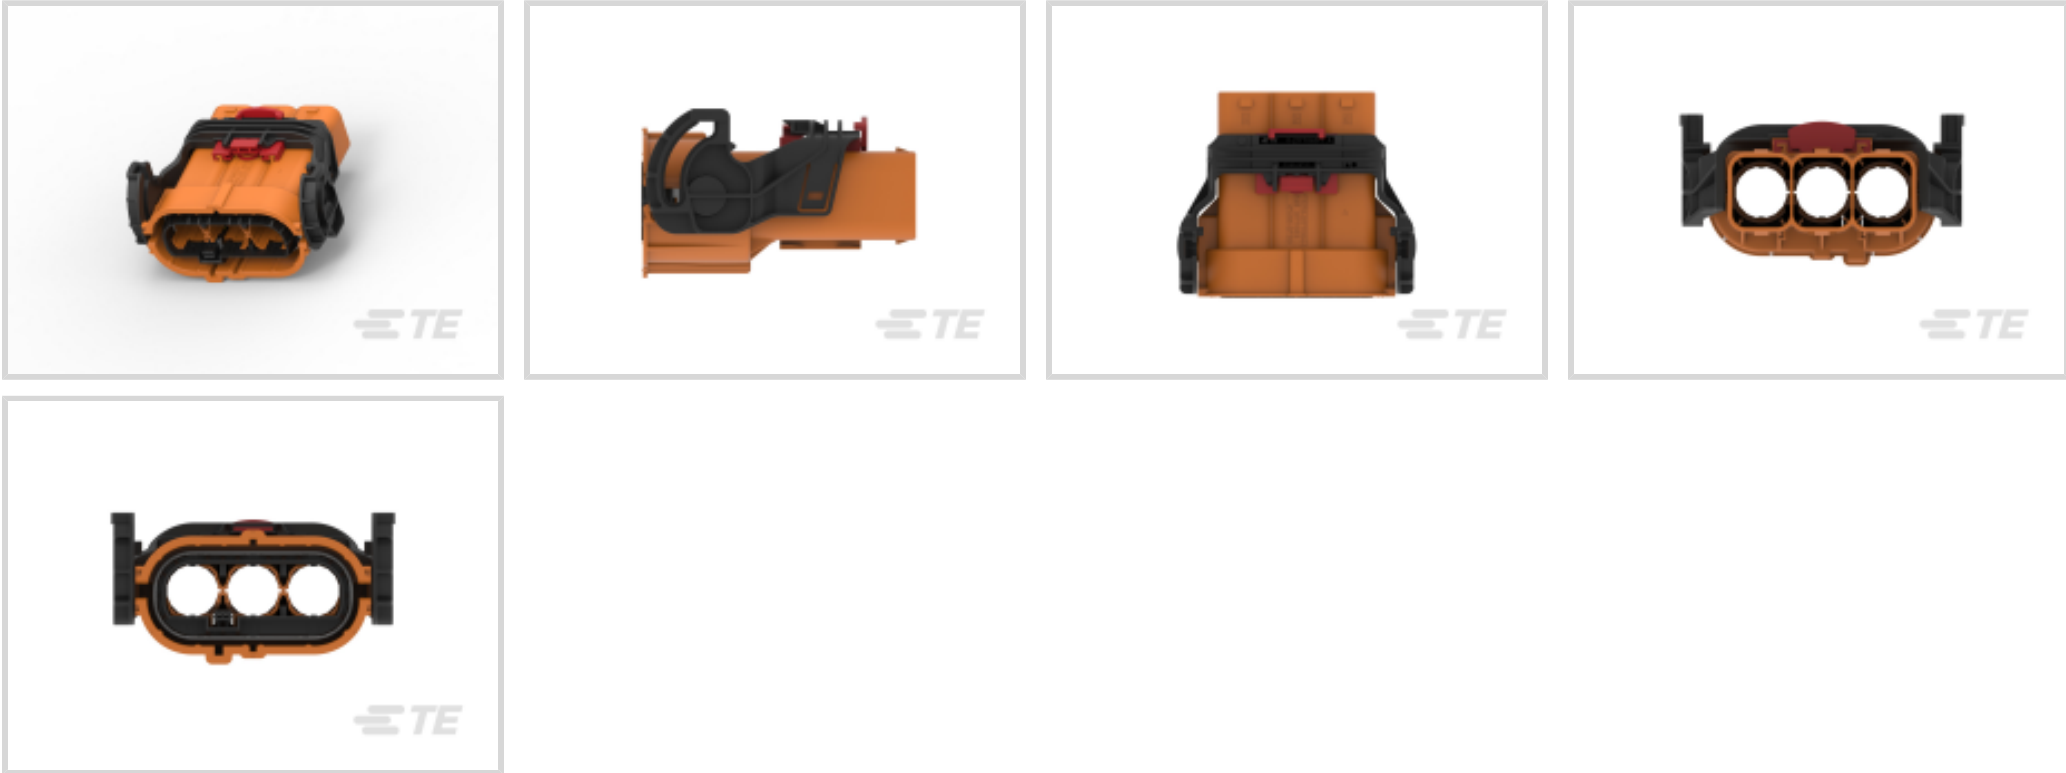
View on TE.com >

Connectors > Automotive Connectors > Automotive Housings

Connector System: **Wire-to-Wire**

Number of Positions: **3**

Connector & Housing Type: **Housing for Male Terminals**

Centerline (Pitch): **23 mm [.9 in]**

Sealable: **Yes**

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	850 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V, 500 V, 550 V, 600 V

Body Features

Cable Exit Angle	180°

1-2177063-1

Housing for Male Terminals, Wire-to-Wire, 3 Position, .9 in [23 mm] Centerline,
Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800

Primary Product Color	Orange
Connector & Keying Code	A

Contact Features

Contact Size	8mm
Contact Type	Pin
Mating Pin Diameter	8 mm[.314 in]

Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
Centerline (Pitch)	23 mm[.9 in]

Dimensions

Connector Height	57.3 mm[2.25 in]
Product Width	92.5 mm[3.64 in]
Product Length	108 mm[4.25 in]

Usage Conditions

Operating Temperature (Max)	140 °C[284 °F]
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]

Operation/Application

Circuit Application	Signal

Industry Standards

Degree of Protection	IP6K9K

Packaging Features

Packaging Quantity	18
Packaging Method	Box

Other

Serviceable	No

1-2177063-1

Housing for Male Terminals, Wire-to-Wire, 3 Position, .9 in [23 mm] Centerline,
Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800

Connector Position Assurance Capable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach
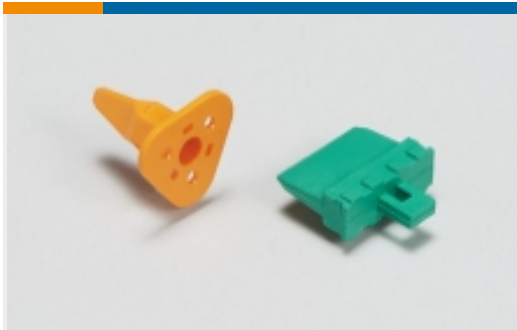
Compatible Parts

TE Part # 2177058-1
INSULATION INSERT,180DEG

Also in the Series | AMP+ HVP800

1-2177063-1

Housing for Male Terminals, Wire-to-Wire, 3 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800

Automotive Connector Caps & Covers (11)

Automotive Connector EMC Shielding (10)

Automotive Connector Locks & Position Assurance(1)

Automotive Housings(56)

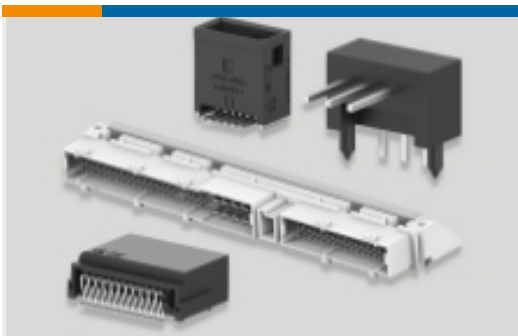Automotive Terminals(7)

Connector Seals & Cavity Plugs(5)

Electric, Hybrid & Fuel Cell Cable Assemblies(79)
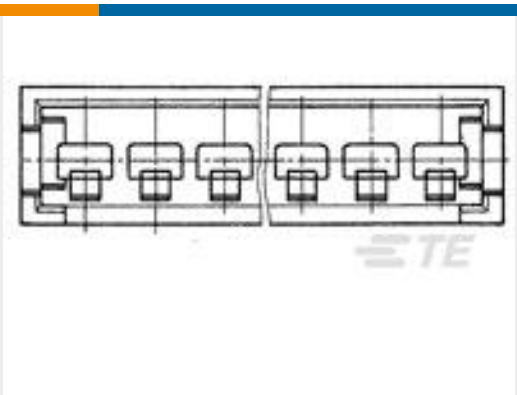
High Voltage Wire Processing Equipment(24)

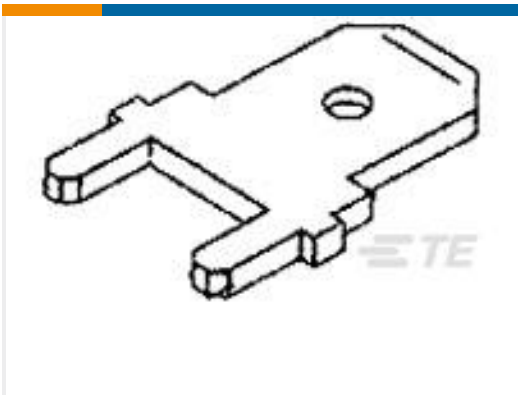Other Automotive Connector Accessories(1)

PCB Headers & Receptacles(44)

Customers Also Bought

TE Part # 280628
AMPMODU II COSI PIN HSG, SGL ROW, 2 POS.

TE Part # 63525-1
187 FASTON TAB TPBR

TE Part # 2177059-1
PROTECTION CAP,180DEG

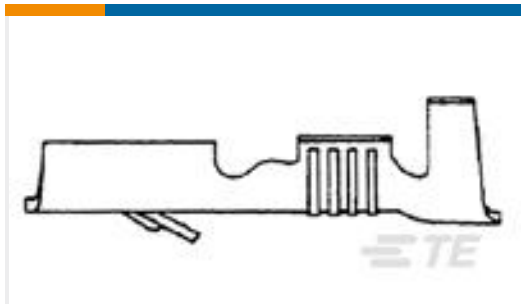TE Part # 2141230-1
3POS,PIN DIA 8.0,PIN HSG,ASSY,SLD

TE Part # 0989076002
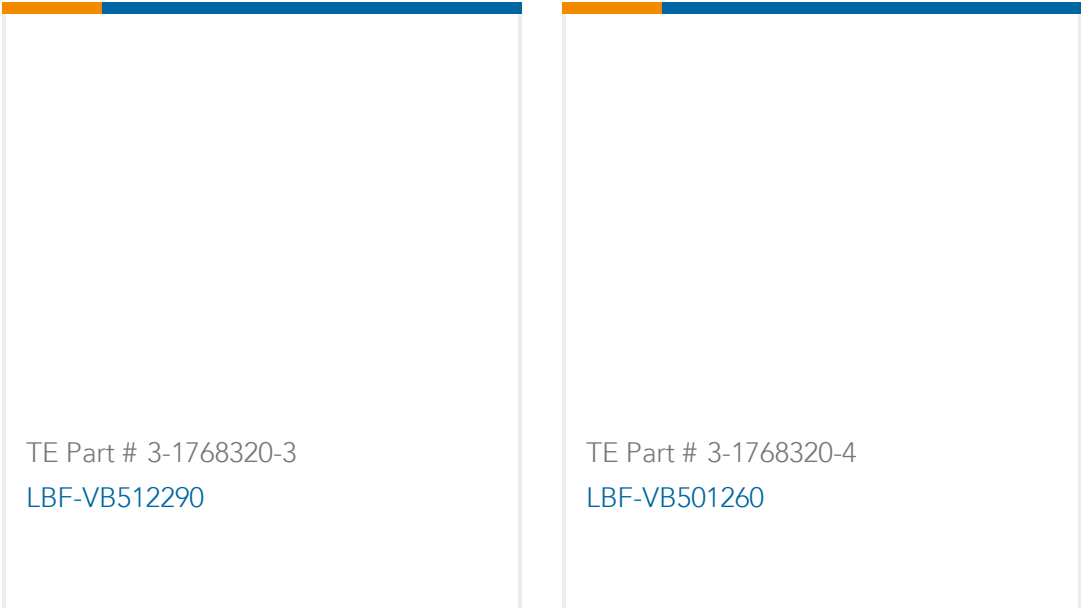RBK-ILS-125-NR2-0-50MM

TE Part # 2208608-3
8MM HV, CONTACT,ASSY

TE Part # 2311753-1
2POS,PCON12,REC HSG ASSY, 180DEG,COD A

TE Part # 141013-2
FF 250 REC 18-14 AWG TPBR LP

Housing for Male Terminals, Wire-to-Wire, 3 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800

TE Part # 3-1768320-3
LBF-VB512290

TE Part # 3-1768320-4
LBF-VB501260

Documents

Product Drawings

3POS,8MM HV,PLUG HSG,ASSY,SEALED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2177063-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2177063-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2177063-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English