

Relays & Contactors > Relays > Mil-Aero Relays > TO-5/.100 Grid Relays



Contact Arrangement: **2 Form C, DPDT, 2 C/O**

Input Voltage: **26.5 VDC**

Coil Voltage Rating: **26.5 VDC**

Coil Resistance: **1560 Ω**

Coil Power Rating DC: **450 mW**

Features

Configuration Features

Coil Special Features

Coil Polarity Protection Diode, Coil Suppression Diode

Contact Arrangement

2 Form C, DPDT, 2 C/O

Electrical Characteristics

Contact Current Rating

1 A

Contact Switching Voltage (Max)

28 VDC

Input Voltage

26.5 VDC

Coil Voltage Rating

26.5 VDC

Coil Resistance

1560 Ω

Coil Power Rating DC

450 mW

Body Features

Enclosure Type

Hermetically Sealed

Termination Features

Relay Connection Type

PCB Termination

Terminal Configuration

Solder Pins

Usage Conditions

Operating Temperature Range

-65 - 125 °C

Operation/Application

Vibration Resistance	30G's, 10 - 3000Hz
Actuating System	DC
Shock Resistance	75G's, 6ms
Coil Magnetic System	Non-Polarized, Monostable

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1617036-6
HFW4A1201D00 = HFW 4A RELAY

Customers Also Bought



TE Part # 5088450-5
PULL LOOP, CUT LENGTH .88 IN




TE Part # 5499141-7
A/L UNIV HDR 30P RA LG LAT



TE Part # 3-794681-8
08P MICRO MNL ASSY,VRT,THRU,LF



TE Part # 1746136-1
SHIELD FINGER 1520 AU PL VERSION

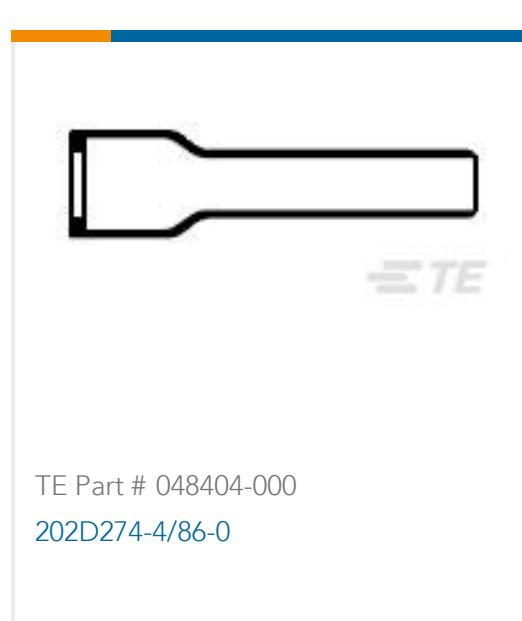

TE Part # 048404-000
202D274-4/86-0



TE Part # EM7480-000
X2-1.5-0-SP-SM



TE Part # 5-103958-7
2X8 MTE RCPT SR LATCH .100CL



TE Part # 3830933001
44A0121-12-0/9



TE Part # CTJ712K01E-513
MODULE ASSY

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-1617122-2_H.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1617122-2_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1617122-2_H.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

RELAY

English