
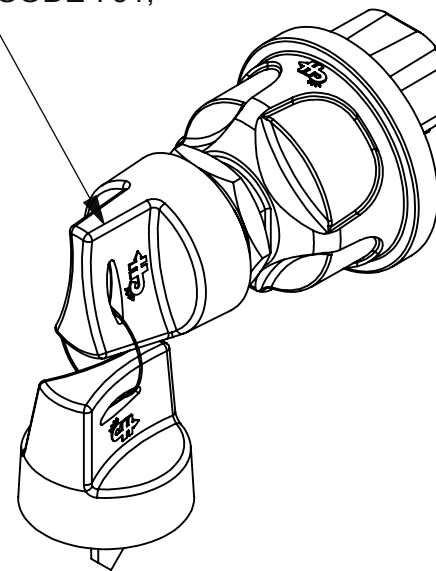



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	EC #516142-INITIAL RELEASE DRAWING	2016/06/28	JT



- | PIN NUMBER | CIRCUIT | 12VDC RESISTIVE LOAD |
|--|-----------|----------------------|
| 2 | START | 5 AMPS |
| 3 | GLOW PLUG | 10 AMPS |
| 4 & 5 | IGNITION | 10 AMPS |
| 1 & 6 | BATTERY | |
| PIN 1 & 6 CONNECTED TOGETHER INTERNALLY
PIN 4 & 5 CONNECTED TOGETHER INTERNALLY | | |

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.													
		DENOTES PRODUCTS CRITICAL CHARACTERISTICS											
CPK		DENOTES CPK DIMENSIONS MINIMUM CPK VALUE											
		DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS											
CP		DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE											
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO2768-M)													
DIMENSION		UP TO 0.5 - 3		OVER 3 - 6		UP TO 6 - 30		OVER 30 - 120		UP TO 120 - 400		ANGLE	
TOLERANCES		±0.1		±0.1		±0.2		±0.3		±0.5		±1°	
		NAME		DATE		 Expertise Applied Answers Delivered No.6 Xinghai Street, Suzhou Industry Park, China Phone +86 512 6761 3189 Fax +86 512 6761 1489							
DRAWN		J. LI		2016/06/27									
CHECKED		JT		2016/06/28									
		-		-									
		-		-									
		-		-		TITLE SW, ROT, 4POS, PLSTC							
		-		-									
		-		-									
THIRD ANGLE PROJECTION													
													
SIZE B		DWG. NO.		95060-47						REV. A			
DO NOT SCALE DRAWING				SCALE 1:1						SHEET 1 OF 1			