

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



1- or 2-channel contact extension with wide range input, 4 N/O contacts, 1 N/C contact, 1 confirmation current path, together with basic device up to Cat. 4, PL e in accordance with EN ISO 13849, plug-in Push-in terminal block, width: 22.5 mm

## Product description

The URM4 contact extension device enables safety-related signals to be further processed as floating contacts for an input voltage range of 42 to 230 V AC/DC. The contact extension device specifically covers the operating range above a nominal voltage of 24 V.

The new device is approved in accordance with EN 50156 and can therefore be used in furnaces without any additional effort. In particular when used in conjunction with the corresponding PSR safety relay as a basic device, safety circuits up to PL e or SIL 3 can be implemented.

## Commercial data

Item number	2702925
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA151
Catalog page	Page 232 (C-6-2019)
GTIN	4055626428895
Weight per piece (including packing)	206.48 g
Weight per piece (excluding packing)	170.91 g
Customs tariff number	85371098
Country of origin	DE

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

## Technical data

### Product properties

Product type	Safety relays
Product family	PSRclassic
Application	Extension module
Mechanical service life	$10 \times 10^6$ cycles
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

### Times

Typ. starting time with $U_s$	< 100 ms (with $U_s$ / when controlled via A1)
Typical release time	< 40 ms (Control via A1 at 42 V DC)
	< 200 ms (Control via A1 at 230 V AC)
Recovery time	< 1 s

### Electrical properties

Maximum power dissipation for nominal condition	16.1 W (At $I_L^2 = 72 \text{ A}^2$ , $P_{\text{Total max}} = 1.7 \text{ W} + 14.4 \text{ W}$ )
Nominal operating mode	100% operating factor

### Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
Rated surge voltage/insulation	

### Supply

Rated control circuit supply voltage $U_s$	42 V AC/DC -15 % / +10 % 230 V AC/DC -15 % / +10 %
Rated control supply current $I_s$	typ. 35 mA (At 42 V DC) typ. 15 mA (@ 230 V AC)
Power consumption at $U_s$	1.5 W (with DC) 1.7 W (with AC)
Apparent power	max. 3.5 VA (at $U_s$ )
Inrush current	< 20 A ( $\Delta t = 100 \mu\text{s}$ at $U_s$ )
Protective circuit	Surge protection; Suppressor diode and varistors

### Output data

#### Relay: Enabling current paths (13/14, 23/24, 33/34, 43/44)

Output description	2 N/O contacts in series, safety-related, floating
Number of outputs	4
Contact switching type	4 enabling current paths
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 5 V AC/DC max. 250 V AC
Switching capacity	min. 50 mW
Inrush current	min. 10 mA

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

	max. 8 A
Switching capacity in accordance with IEC 60947-5-1	5 A (AC15) 6 A (DC13)
Limiting continuous current	6 A (observe derating)
Sq. Total current	72 A <sup>2</sup> (observe derating)
Switching frequency	max. 0.5 Hz
Output fuse	6 A gL/gG (High demand) 4 A gL/gG (Low demand)

## Relay: Diagnostics contact (51/52)

Output description	2 N/O contacts in series, floating
Number of outputs	1
Contact switching type	1 confirmation current path
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 5 V AC/DC max. 250 V AC
Switching capacity	min. 50 mW
Inrush current	min. 10 mA max. 6 A
Switching capacity in accordance with IEC 60947-5-1	1 A (AC15) 1 A (DC13)
Limiting continuous current	1 A (see to derating)
Sq. Total current	1 A <sup>2</sup> (see to derating)
Switching frequency	max. 0.5 Hz
Output fuse	1 A (gL/gG)

## Relay: Signaling current path (61/62)

Output description	2 N/C contacts in parallel, floating
Number of outputs	1
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 5 V AC/DC 250 V AC
Switching capacity	min. 50 mW
Inrush current	max. 6 A
Switching capacity in accordance with IEC 60947-5-1	5 A (AC15) 6 A (DC13)
Limiting continuous current	6 A (observe derating)
Sq. Total current	36 A <sup>2</sup> (observe derating)
Switching frequency	max. 0.5 Hz
Output fuse	1 A (gL/gG)

## Connection data

Connection technology	
pluggable	yes

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

## Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6)
Conductor cross-section AWG	24 ... 16
Stripping length	8 mm

## Signaling

Operating voltage display	1 x green LED
---------------------------	---------------

## Dimensions

Width	22.5 mm
Height	112 mm
Depth	114.5 mm

## Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	Polyamide

## Characteristics

### Safety data

Stop category	0
---------------	---

### Safety data: EN ISO 13849

Category	4 (In conjunction with suitable evaluating device)
Performance level (PL)	e (In conjunction with suitable evaluating device)

### Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	3 (In conjunction with suitable evaluating device)
------------------------------	--

### Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	3 (In conjunction with suitable evaluating device)
------------------------------	--

### Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3 (In conjunction with suitable evaluating device)
------------------------------	--

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-20 °C ... 55 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, amplitude 0.15 mm, 2g

## Approvals

CE

Identification	CE-compliant
----------------	--------------

## Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	IEC 60664-1
-----------------------	-------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module




2702925

<https://www.phoenixcontact.com/us/products/2702925>


## Drawings

Application drawing

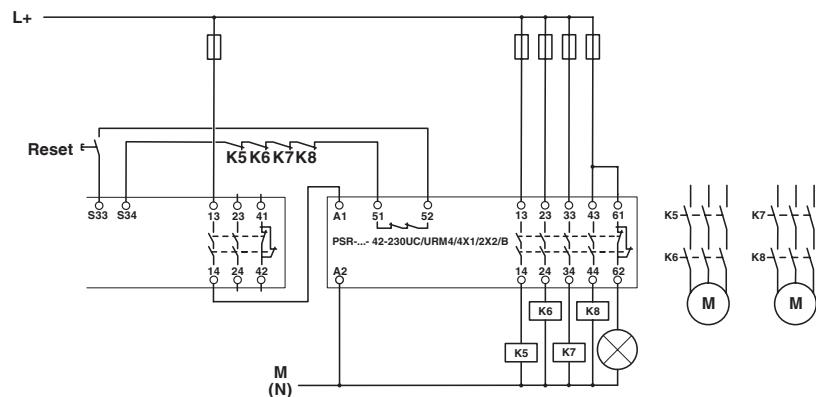

Contact extension

Application drawing

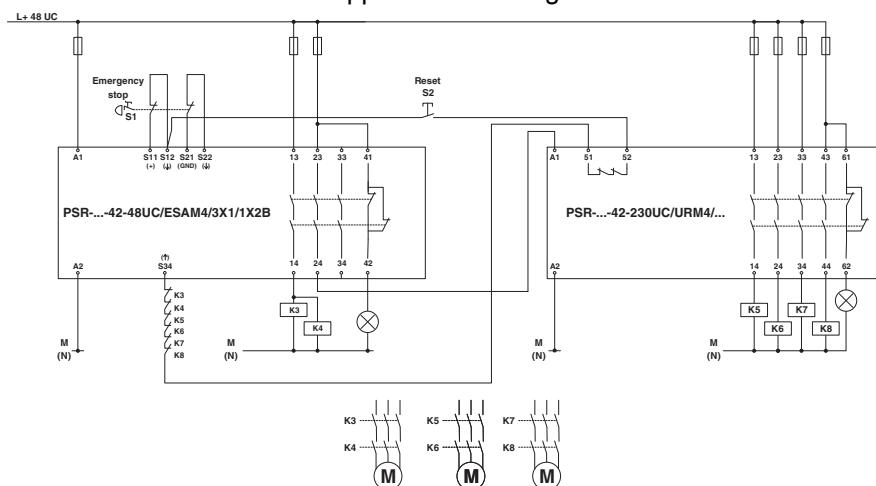


Two-channel emergency stop monitoring with contact extension

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

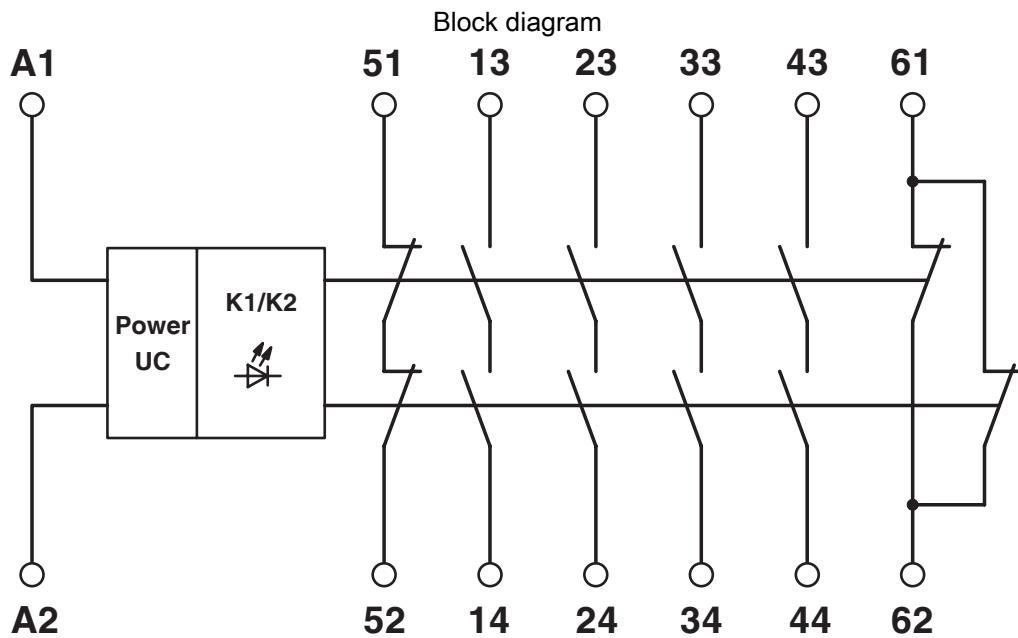

Block diagram

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2702925>



**UL Listed**

Approval ID: FILE E 140324



**cUL Listed**

Approval ID: FILE E 140324



**Functional Safety**

Approval ID: 968/EZ 575.03/23



**Functional Safety**

Approval ID: 968/EZ 575.02/22



**Functional Safety**

Approval ID: 968/EZ 575.03/23



**Functional Safety**

Approval ID: 968/EZ 575.02/22

**cULus Listed**

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

## Classifications

### ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

### ETIM

ETIM 8.0	EC001449
----------	----------

### UNSPSC

UNSPSC 21.0	39122200
-------------	----------

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	4b330aef-4171-49b2-8664-06593ca59094

# PSR-SPP-42-230UC/URM4/4NO/2NC - Extension module



2702925

<https://www.phoenixcontact.com/us/products/2702925>

## Accessories

### CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)