

OJE-SS-112LMH,000

✓ ACTIVE

OEG | OEG Miniature PCB Relay OJ/OJE

TE Internal #: 5-1419128-0


Power Relays, Standard, Monostable, 200 mW Coil Power Rating

DC, 720 Ω Coil Resistance, OEG Miniature PCB Relay OJ/OJE

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays > STD OEG Miniature PCB OJ/OJE Pow Relays

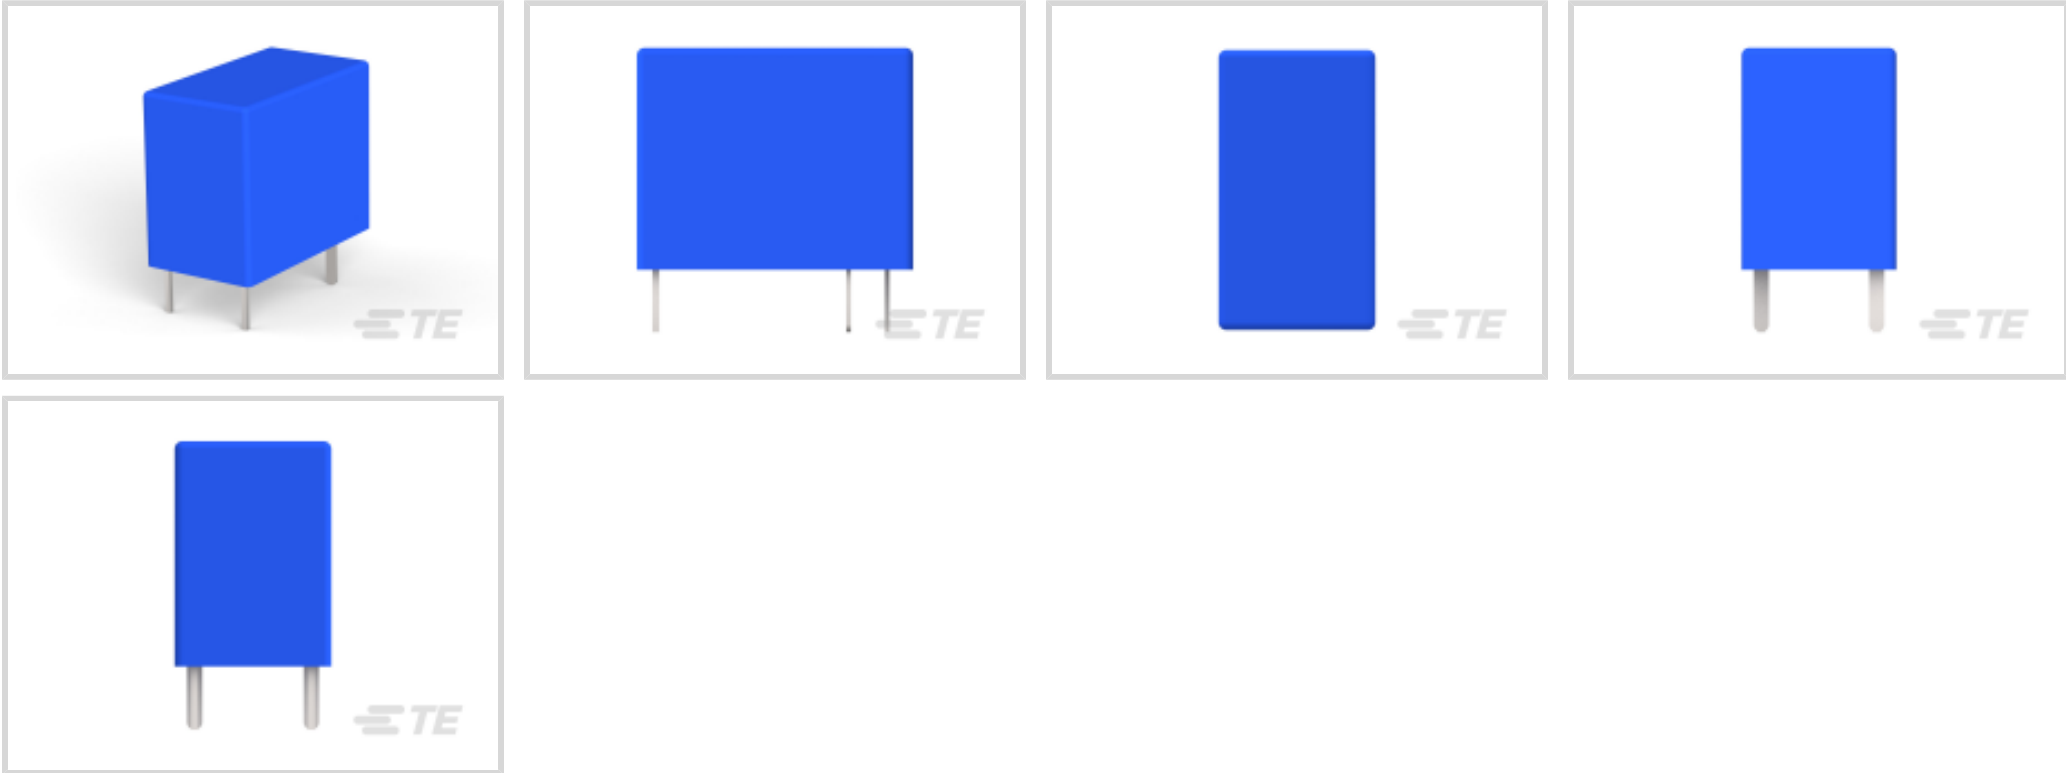

Relay Type: **Standard**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **200 mW**

Coil Resistance: **720 Ω**

Coil Special Features: **Sensitive Version, UL Coil Insulation Class B**

[All STD OEG Miniature PCB OJ/OJE Pow Relays \(65\)](#)

Features

Product Type Features

Relay Type	Standard
------------	----------

Configuration Features

Insulation Special Features	Tracking Index of Relay Base PTI250
Coil Special Features	Sensitive Version, UL Coil Insulation Class B
Contact Arrangement	1 Form A (NO)
Contact Number of Poles	1

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	8 A
Contact Limiting Short-Time Current	8 A
Contact Limiting Continuous Current	8 A
Insulation Initial Dielectric Between Contacts & Coil	3000 Vrms
Contact Limiting Breaking Current	8 A



Coil Power Rating DC	200 mW
Coil Resistance	720 Ω
Coil Voltage Rating	12 VDC
Contact Current Rating	8 A
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	30 VDC
Contact Voltage Rating	30 VDC

Body Features

Product Weight	9 g[.318 oz]
----------------	--------------

Contact Features

Contact Material	W + AgSnO2
------------------	------------

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	3.2 mm[.125 in]
Insulation Creepage Between Contact & Coil	3.6 mm[.141 in]
Product Width	10.2 mm[.401 in]
Product Length	18.2 mm[.716 in]
Product Height	14.7 mm[.58 in]

Usage Conditions

Environmental Ambient Temperature (Max)	70 °C[158 °F]
---	---------------

Operation/Application

Actuating System	DC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Bundle
------------------	--------

Other

Length Class (Mechanical)	16 - 20 mm
---------------------------	------------



Insulation Initial Dielectric Between Coil & Contact Class	2500 - 3000 V
Environmental Ambient Temperature Class	50 - 70 °C
Insulation Creepage Class	3 - 5.5 mm
Insulation Clearance Class	0 - 2.5 mm
Height Class (Mechanical)	14 - 15 mm
Coil Power Rating Class	150 - 200 mW
Width Class (Mechanical)	10 - 12 mm
Contact Current Class	16 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Cadmium oxide (4.75% in Component Part) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-OE4-OJ1
STD OEG Miniature PCB OJ/OJE Pow Relays

Also in the Series

OEG Miniature PCB Relay OJ/OJE

Power Relays(67)

Customers Also Bought

TE Part # 284514-2
2 POS TERMI-BLOK HDR DIR. POL.

TE Part # 284514-3
3 POS TERMI-BLOK HDR DIR. POL.

TE Part # 3-1676481-2
CPF 0603 110R 0.1% 25PPM 1K RL

TE Part # 5-2176237-8
CPF A 0603 75K 0.1% 25PPM 5K RL

TE Part # 1-2176338-4
CRGCQ 0402 150R 5%

TE Part # 2176331-5
CRGP 2512 22R 1%

TE Part # 2176388-1
RQ 1206 10R 0.1% 10PPM 5K RL

TE Part # 1-2177370-3
12POS,TAB 0.5X0.4,HEADER ASSY, CODB

TE Part # 3-1393127-8
PRD-11DG0-24=PRD

TE Part # BAT-HLD-007-SMT-TR
Holder 1216 1220 1225 SMT T&R Pack



Documents

Product Drawings

OJE-SS-112LMH,000

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-1419128-0_K.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1419128-0_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-1419128-0_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

OJ_OJE Series Relay Data Sheet English

English

Product Specifications

OJE-SS-112LMH,000 Spec Sheet

Japanese

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English