

[Relays & Contactors > Relays > Mil-Aero Relays > Half-Size Relays](#)Contact Arrangement: **2 Form C, DPDT, 2 C/O**Input Voltage: **12 VDC**Contact Current Rating: **2 A**Coil Voltage Rating: **12 VDC**Coil Resistance: **310 Ω**

Features

Configuration Features

Contact Arrangement	2 Form C, DPDT, 2 C/O
---------------------	-----------------------

Electrical Characteristics

Input Voltage	12 VDC
Contact Current Rating	2 A
Coil Voltage Rating	12 VDC
Coil Resistance	310 Ω
Coil Power Rating DC	465 mW

Body Features

Enclosure Type	Hermetically Sealed
----------------	---------------------

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	PCB Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Usage Conditions

Operating Temperature Range	-65 - 125 °C
-----------------------------	--------------

Operation/Application

Vibration Resistance	30G's, 10 - 3000Hz
Actuating System	DC
Shock Resistance	50G's, 11ms
Coil Magnetic System	Non-Polarized, Monostable

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1617122-5
JMACD-26XP = M39016/15-081P

Customers Also Bought



TE Part # 87175-2
01 LOCKING CLIP HSG SR .100CL



TE Part # 5260030007
TC-CAPS-4005-8



TE Part # 1766192-1
CONTACT,PIN,#8



TE Part # 1-87175-4
06 LOCKING CLIP HSG SR .100CL



TE Part # 5173279-3
MINI MITE PLUG ASSY 50P (V)




TE Part # 1-1617076-1
3SBH1139A2 = M39016/14-002M



TE Part # 1766194-1
CONTACT,PIN,#16



TE Part # 148527-1
EURO SHROUD 160 POS

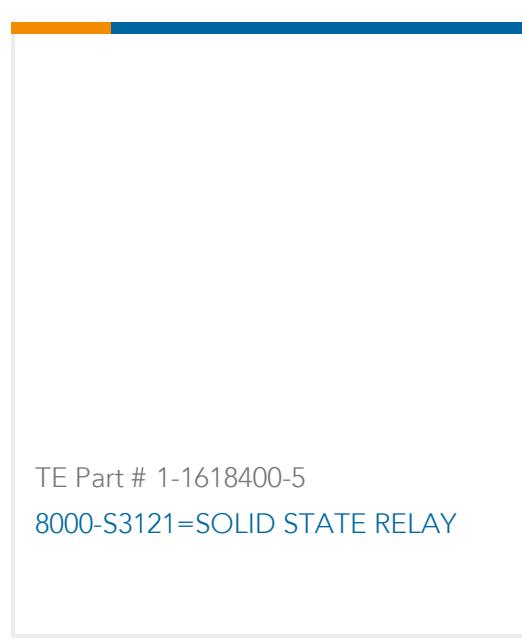

TE Part # 1-1618400-5
8000-S3121=SOLID STATE RELAY



TE Part # 1-1617067-3
8000-X3024 = VOLTAGE PHASE SEN

Documents

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2-1617039-8_3.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1617039-8_3.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1617039-8_3.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[5-1773450-5_sec1_HFW](#)

English

HMS1201S110P

Half-Size Relays, Contact Arrangement 2 Form C, DPDT, 2 C/O, 12VDC Input
Voltage, 2A Contact Current Rating, 12VDC Coil Voltage Rating

