

RY611005  ACTIVE

SCHRACK | SCHRACK Miniature Power PCB RYII


TE Internal #: 1-1393225-7

Power Relays, Standard, Monostable, 223 mW Coil Power Rating  
DC, 112 Ω Coil Resistance, UL Coil Insulation Class F, SCHRACK  
Miniature Power PCB RYII

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays

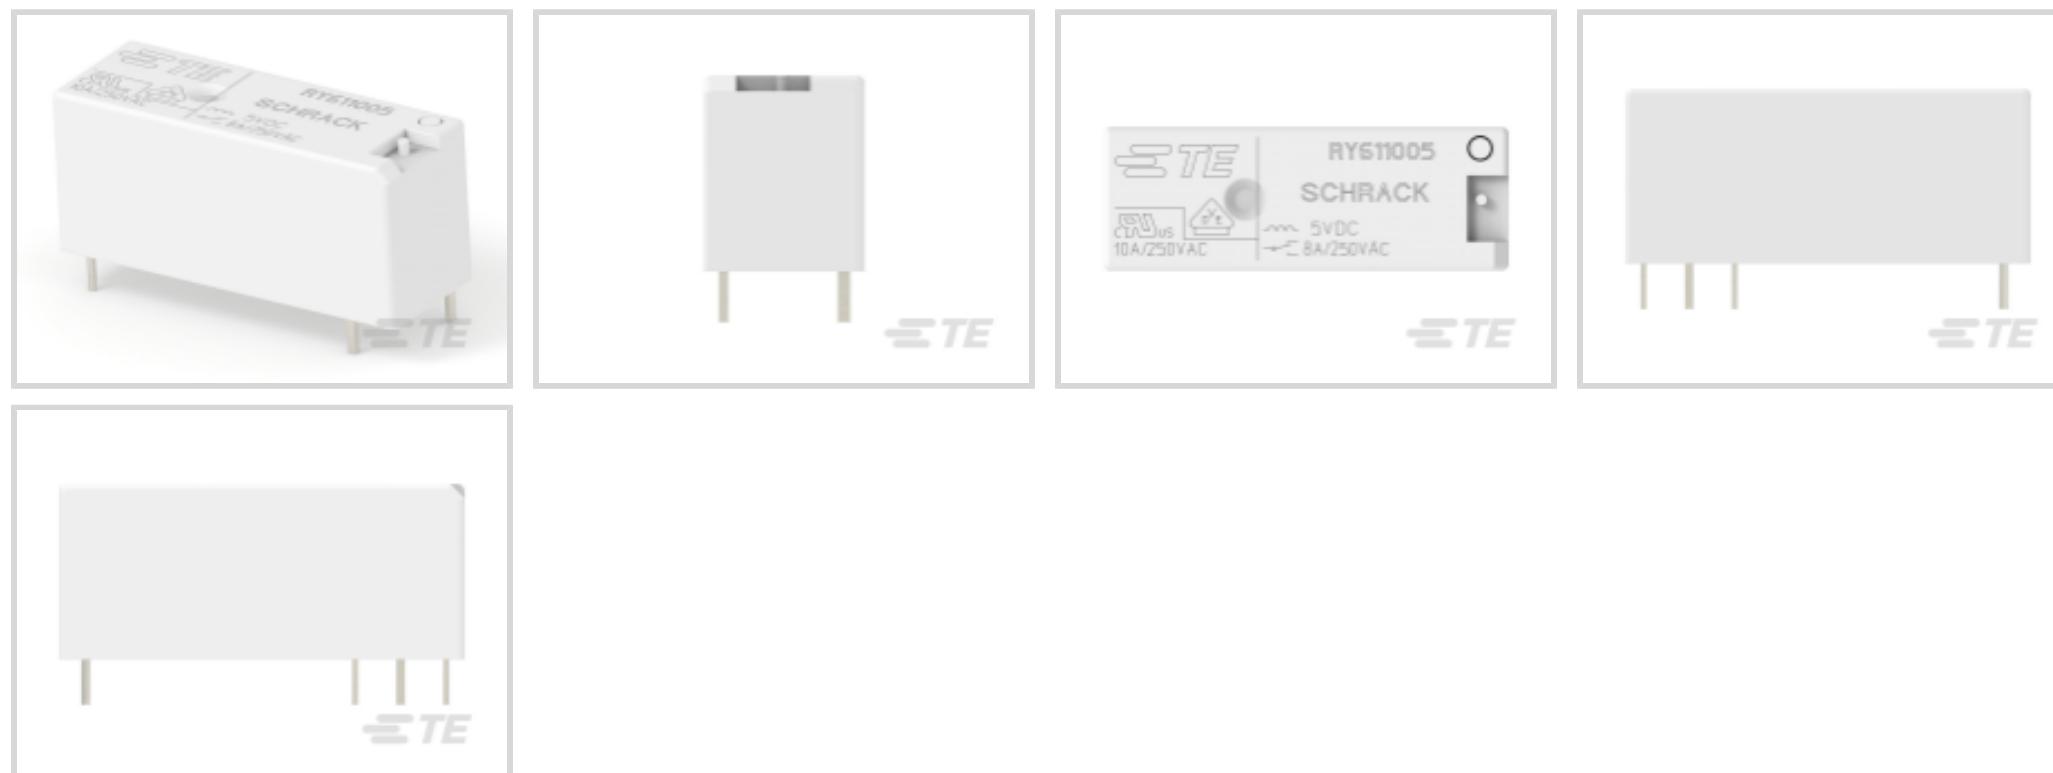

Relay Type: **Standard**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **223 mW**

Coil Resistance: **112 Ω**

Coil Special Features: **UL Coil Insulation Class F**

## Features

### Product Type Features

Relay Type	Standard
------------	----------

### Configuration Features

Insulation Special Features	Tracking Index of Relay Base PTI250
Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	1 Form C (CO)
Contact Number of Poles	1

### Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	8 A
Contact Limiting Short-Time Current	8 A
Contact Limiting Continuous Current	8 A
Insulation Initial Dielectric Between Contacts & Coil	5000 Vrms
Contact Limiting Breaking Current	8 A
Coil Power Rating DC	223 mW

Coil Resistance	112 Ω
Coil Voltage Rating	5 VDC
Contact Current Rating	8 A
Contact Switching Load (Min)	10mA @ 12V
Contact Switching Voltage (Max)	400 VAC
Contact Voltage Rating	250 VAC

#### Body Features

Product Weight	8 g[.282 oz]
----------------	--------------

#### Contact Features

Contact Material	AgNi0.15
------------------	----------

#### Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

#### Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

#### Dimensions

Insulation Clearance Between Contact & Coil	8 mm[.315 in]
Insulation Creepage Between Contact & Coil	8 mm[.315 in]
Product Width	10.1 mm[.397 in]
Product Length	28.5 mm[1.12 in]
Product Height	12.3 mm[.484 in]

#### Usage Conditions

Environmental Ambient Temperature (Max)	70 °C[158 °F]
---	---------------

#### Operation/Application

Actuating System	DC
Solder Process	Wave Solder
Coil Magnetic System	Monostable

#### Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------

#### Other

Length Class (Mechanical)	25 - 30 mm
---------------------------	------------

Insulation Initial Dielectric Between Coil & Contact Class	4000 V
Environmental Ambient Temperature Class	50 - 70 °C
Insulation Creepage Class	5.5 - 8 mm
Insulation Clearance Class	5 - 8 mm
Height Class (Mechanical)	12 - 13 mm
Coil Power Rating Class	200 - 300 mW
Width Class (Mechanical)	10 - 12 mm
Contact Current Class	16 A

## Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com/compliance)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 7-1393161-3  
RY78600

## Also in the Series | SCHRACK Miniature Power PCB RYII

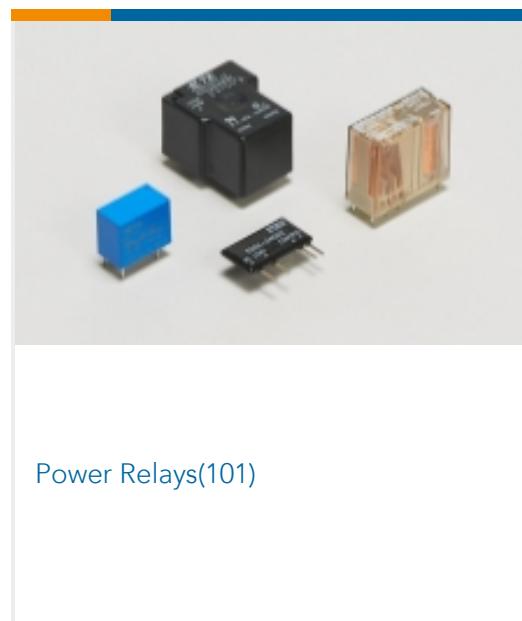

Power Relays(101)

## Customers Also Bought



TE Part # 2013798-1  
INDUSTRIAL USB PLUG CONN KIT



TE Part # 2-1393225-3  
RY612005



TE Part # 1-2176082-2  
EP 3W (S) 680R 5%



TE Part # 1-2176511-7  
CJP 600W 33R 5% Lead



TE Part # 3-1823440-3  
22POS, MIXED,REC HSG,ASSY,  
SEALED




TE Part # 1-1415537-7  
RTD1L005



TE Part # 1-2271451-4  
14 PIN BTB CONNECTOR, PIN HDR  
ASSEMBLY



TE Part # ZPF000000000105326  
DTS 20 N 15-97 PN 900R

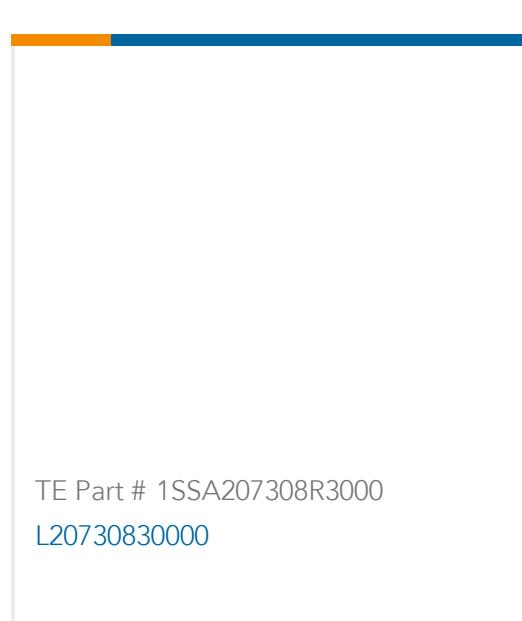

TE Part # 1SSA207308R3000  
L20730830000

## Documents

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1393225-7\\_D.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1393225-7\\_D.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1393225-7\\_D.2d\\_dxf.zip](#)

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

Miniature Power PCB Relay RYII

English

### Product Specifications

[Definitions General Purpose Relays](#)

English

### Agency Approvals

[VDE Certificate](#)

English