

VS-09-ST-DSUB-2P - D-SUB contact support



1688418

<https://www.phoenixcontact.com/us/products/1688418>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

D-SUB contact carrier, shell size 1, accommodation for two combined contacts, type of contact pin, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-09-...



Your advantages

- Compatible with IP67 sleeve housing and panel-mount frame
- Easy assembly

Commercial data

Item number	1688418
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AB19
Product key	ABNCAA
Catalog page	Page 214 (C-2-2013)
GTIN	4017918818340
Weight per piece (including packing)	9.62 g
Weight per piece (excluding packing)	4.47 g
Customs tariff number	85366990
Country of origin	DE

VS-09-ST-DSUB-2P - D-SUB contact support



1688418

<https://www.phoenixcontact.com/us/products/1688418>

Technical data

Notes

Order information:

The contacts must be ordered separately since they are not included in the scope of supply of the contact carriers. Both one male and one female contact must be mounted in the contact carrier.

Product properties

Product type	Male insert
Type	D-SUB
Number of positions	2
Connection profile	D-SUB
Type	Male
Shielded	no


Electrical properties

Transmission medium	Copper
---------------------	--------

Connection data

Connection method	D-SUB
-------------------	-------

Dimensions

Dimensional drawing	
Width	12.5 mm
Height	12.93 mm
Length	31.2 mm

Material specifications

Flammability rating according to UL 94	V0
Housing material	Steel, yellow chromated
Contact material	Copper alloy
Contact surface material	Gold over nickel
Contact carrier material	PBTP

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

VS-09-ST-DSUB-2P - D-SUB contact support



1688418

<https://www.phoenixcontact.com/us/products/1688418>

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP20
Ambient temperature (operation)	-55 °C ... 125 °C

Mounting

Mounting type	Hole
---------------	------

VS-09-ST-DSUB-2P - D-SUB contact support


1688418

<https://www.phoenixcontact.com/us/products/1688418>




Drawings

Dimensional drawing

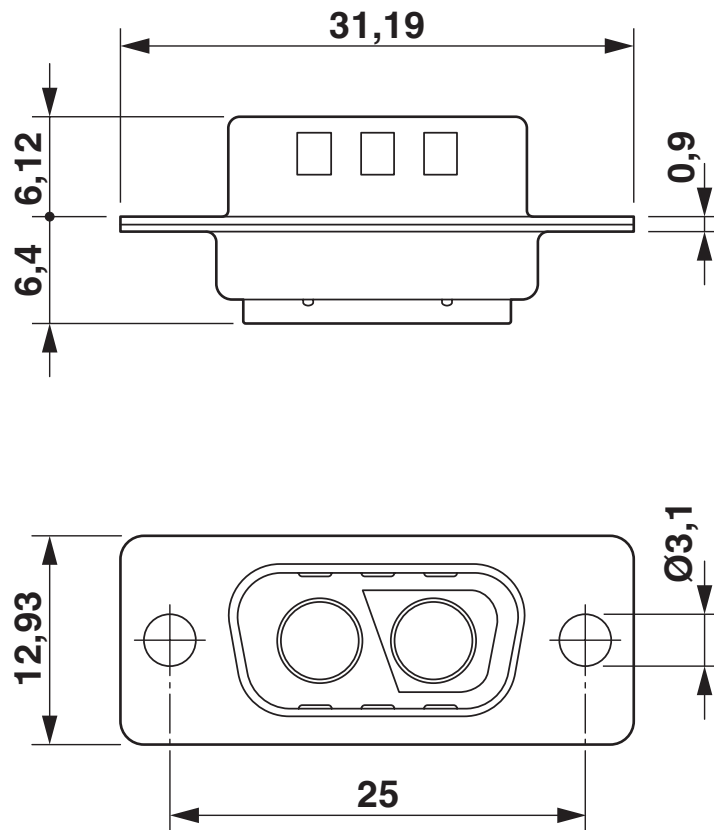


D-SUB contact carrier

Drilling plan/solder pad geometry

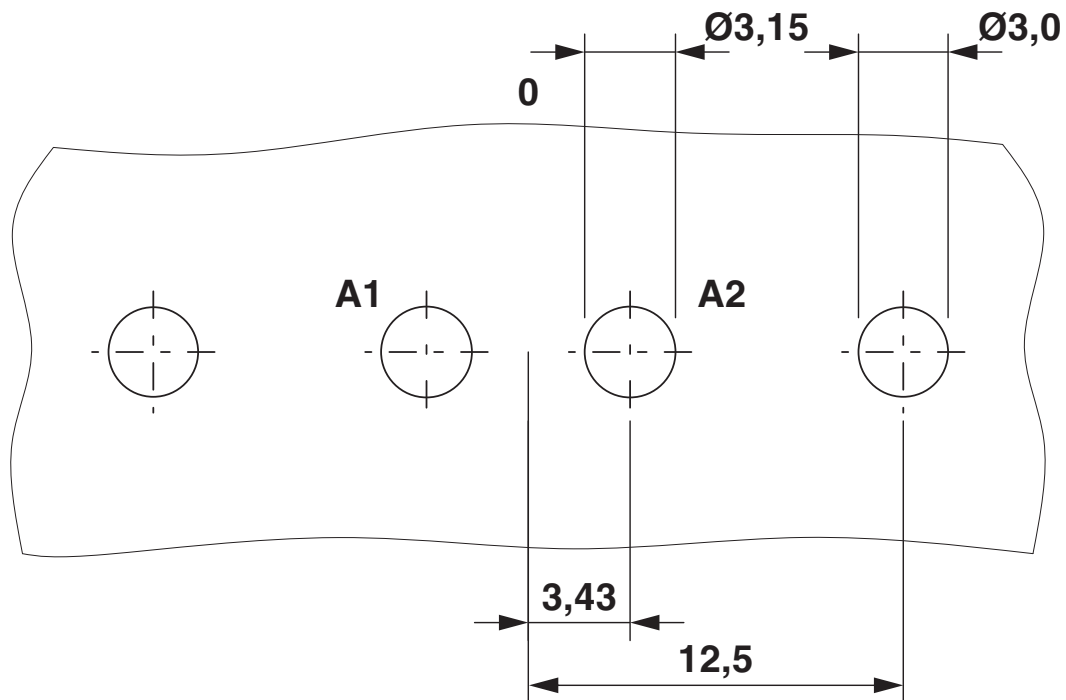

Schematic diagram

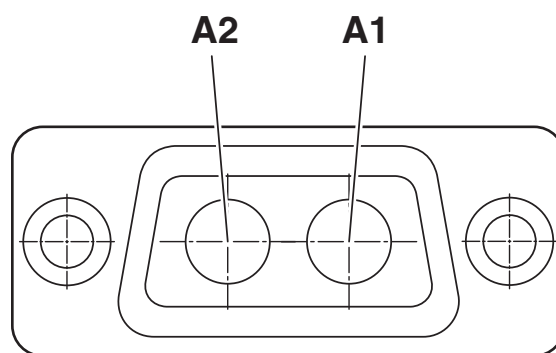

VS-09-ST-DSUB-2P - D-SUB contact support



1688418

<https://www.phoenixcontact.com/us/products/1688418>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1688418>



UL Recognized

Approval ID: FILE E 118976

VS-09-ST-DSUB-2P - D-SUB contact support



1688418

<https://www.phoenixcontact.com/us/products/1688418>

Classifications

ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27440223

ETIM

ETIM 9.0	EC003557
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VS-09-ST-DSUB-2P - D-SUB contact support

1688418

<https://www.phoenixcontact.com/us/products/1688418>



Accessories

VS-ST-SC-2,6 - D-SUB power contact

1655483

<https://www.phoenixcontact.com/us/products/1655483>



Power contact, for D-SUB combination inserts, screw connection, pin, straight, rated current 20 A, gold-plated

VS-ST-KX-50-RG58 - D-SUB coaxial contact

1655580

<https://www.phoenixcontact.com/us/products/1655580>



Coaxial contact, for D-SUB combination inserts, solder cup, socket, straight, for cable RG 58, gold-plated

VS-09-ST-DSUB-2P - D-SUB contact support

1688418

<https://www.phoenixcontact.com/us/products/1688418>



VS-ST-KX-75-RG179/187 - D-SUB coaxial contact

1655629

<https://www.phoenixcontact.com/us/products/1655629>



Coaxial contact, for D-SUB combination inserts, solder cup, pin, straight, for cable RG 179/187, gold-plated

VS-ST-LK-3,6/22,4/2,6 - D-SUB power contact

1688243

<https://www.phoenixcontact.com/us/products/1688243>



Power contacts, for D-SUB combination inserts, pin, solder cup, straight, rated current 20 A, gold-plated

VS-09-ST-DSUB-2P - D-SUB contact support

1688418

<https://www.phoenixcontact.com/us/products/1688418>



VS-ST-LK-3,6/22,4/4,6 - D-SUB power contact

1688269

<https://www.phoenixcontact.com/us/products/1688269>




Power contacts, for D-SUB combination inserts, pin, solder cup, straight, rated current 40 A, gold-plated

CUC-DST-GZNI-S/DSSC9 - D-SUB sleeve housings

1419722

<https://www.phoenixcontact.com/us/products/1419722>



D-SUB sleeve housings, degree of protection: IP20, material: Zinc die-cast, cable outlet: straight, housing size: 1, color: Bare metallic

VS-09-ST-DSUB-2P - D-SUB contact support



1688418


<https://www.phoenixcontact.com/us/products/1688418>

CUC-DST-GZNI-A/DSSC9 - D-SUB sleeve housings

1419723

<https://www.phoenixcontact.com/us/products/1419723>

D-SUB sleeve housings, degree of protection: IP20, material: Zinc die-cast, cable outlet: angled, housing size: 1, color: Bare metallic



CUC-DST-GPME-S/DSSC9 - D-SUB sleeve housings

1419705

<https://www.phoenixcontact.com/us/products/1419705>

D-SUB sleeve housings, degree of protection: IP20, material: ABS, metal-plated, cable outlet: straight, housing size: 1, color: Bare metallic



VS-09-ST-DSUB-2P - D-SUB contact support

1688418


<https://www.phoenixcontact.com/us/products/1688418>



CUC-DST-GPME-A/DSSC9 - D-SUB sleeve housings

1419706

<https://www.phoenixcontact.com/us/products/1419706>



D-SUB sleeve housings, degree of protection: IP20, material: ABS, metal-plated, cable outlet: angled, housing size: 1, color: Bare metallic

CUC-SCHRAUBE-5,5:360 - Screw

1421711

<https://www.phoenixcontact.com/us/products/1421711>



Screw, design: Hexagonal, color: Bare metallic

VS-09-ST-DSUB-2P - D-SUB contact support

1688418

<https://www.phoenixcontact.com/us/products/1688418>



VS-09-BU-DSUB-2P - D-SUB contact support

1688421

<https://www.phoenixcontact.com/us/products/1688421>

D-SUB contact carrier, shell size 1, accommodation for two combined contacts, type of contact socket, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-09-...



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com