

**1SNK506152R0000**

ACTIVE

**ENTRELEC | ENTRELEC SNK**

TE Internal #: 1SNK506152R0000

Modular Terminal Blocks, Ground, Screw Clamp Terminal Block, Green &amp; Yellow, Product Spacing .236 in [6 mm], 4 Position, DIN Rail, ENTRELEC SNK

[View on TE.com >](#)

Connectors &gt; Terminal Blocks &amp; Strips &gt; Modular Terminal Blocks

Block Function: **Ground**Modular Terminal Block Product Type: **Screw Clamp Terminal Block**Primary Product Color: **Green & Yellow**Product Spacing: **6 mm [ .236 in ]**Number of Positions: **4**

## Features

### Product Type Features

Modular Terminal Block Product Type

Screw Clamp Terminal Block

### Configuration Features

Gauge Type

A4-B3

Number of Levels

1

Number of Circuits

1

Block Function

Ground

Number of Positions

4

### Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)

8000 V

Dielectric Withstanding Voltage (Max)

2000 V

Short-Time Withstanding Current Rating @ 1s

480 A

### Body Features

Product Weight

19.4 g[.764 oz]

Primary Product Color

Green &amp; Yellow

### Mechanical Attachment

DIN Rail Mounting Type

TH35-15, TH35-7.5

Connector Mounting Type

DIN Rail

### Housing Features

Housing Material	Polyamide
------------------	-----------

### Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	24 - 10 AWG
Main Circuit Capacity - Twin Ferrule per Screw Clamp	24 - 14 AWG
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	.22 - 6 mm <sup>2</sup>
Wire Stripping Length	10.5 mm [.413 in]
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	24 - 12 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	.22 - 4 mm <sup>2</sup>
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	.2 - 2.5 mm <sup>2</sup>
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	.2 - 2.5 mm <sup>2</sup>
Tool Size	4 mm [.157 in]
Product Depth	48.3 mm
Product Length	48.3 mm
Product Height	79.2 mm
Product Spacing	6 mm [.236 in]

### Usage Conditions

Installation Temperature Range	-5 - 40 °C [23 - 104 °F]
Operating Temperature Range	-55 - 110 °C [-67 - 230 °F]

### Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

### Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC

## Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

## Solder Process Capability

Not reviewed for solder process capability

## Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1SNK140000R0000  
MC512



TE Part # 1SNK140004R0000  
MC512-YL



TE Part # 1SNK150000R0000  
MC612



TE Part # 1SNK505911R0000  
ES6-4S



TE Part # 1SNK90001R0000  
BAM4



TE Part # 1SNK90002R0000  
BAZ1



TE Part # 1SNK900101R0000  
CS



TE Part # 1SNK900103R0000  
CS-R1



TE Part # 1SNK900105R0000  
ES-TC6




TE Part # 1SET111013R0000  
WF040-10-OR



TE Part # 1SET111032R0000  
WF040-10-GR




TE Part # 1SNA164800R0300  
PR3.G2

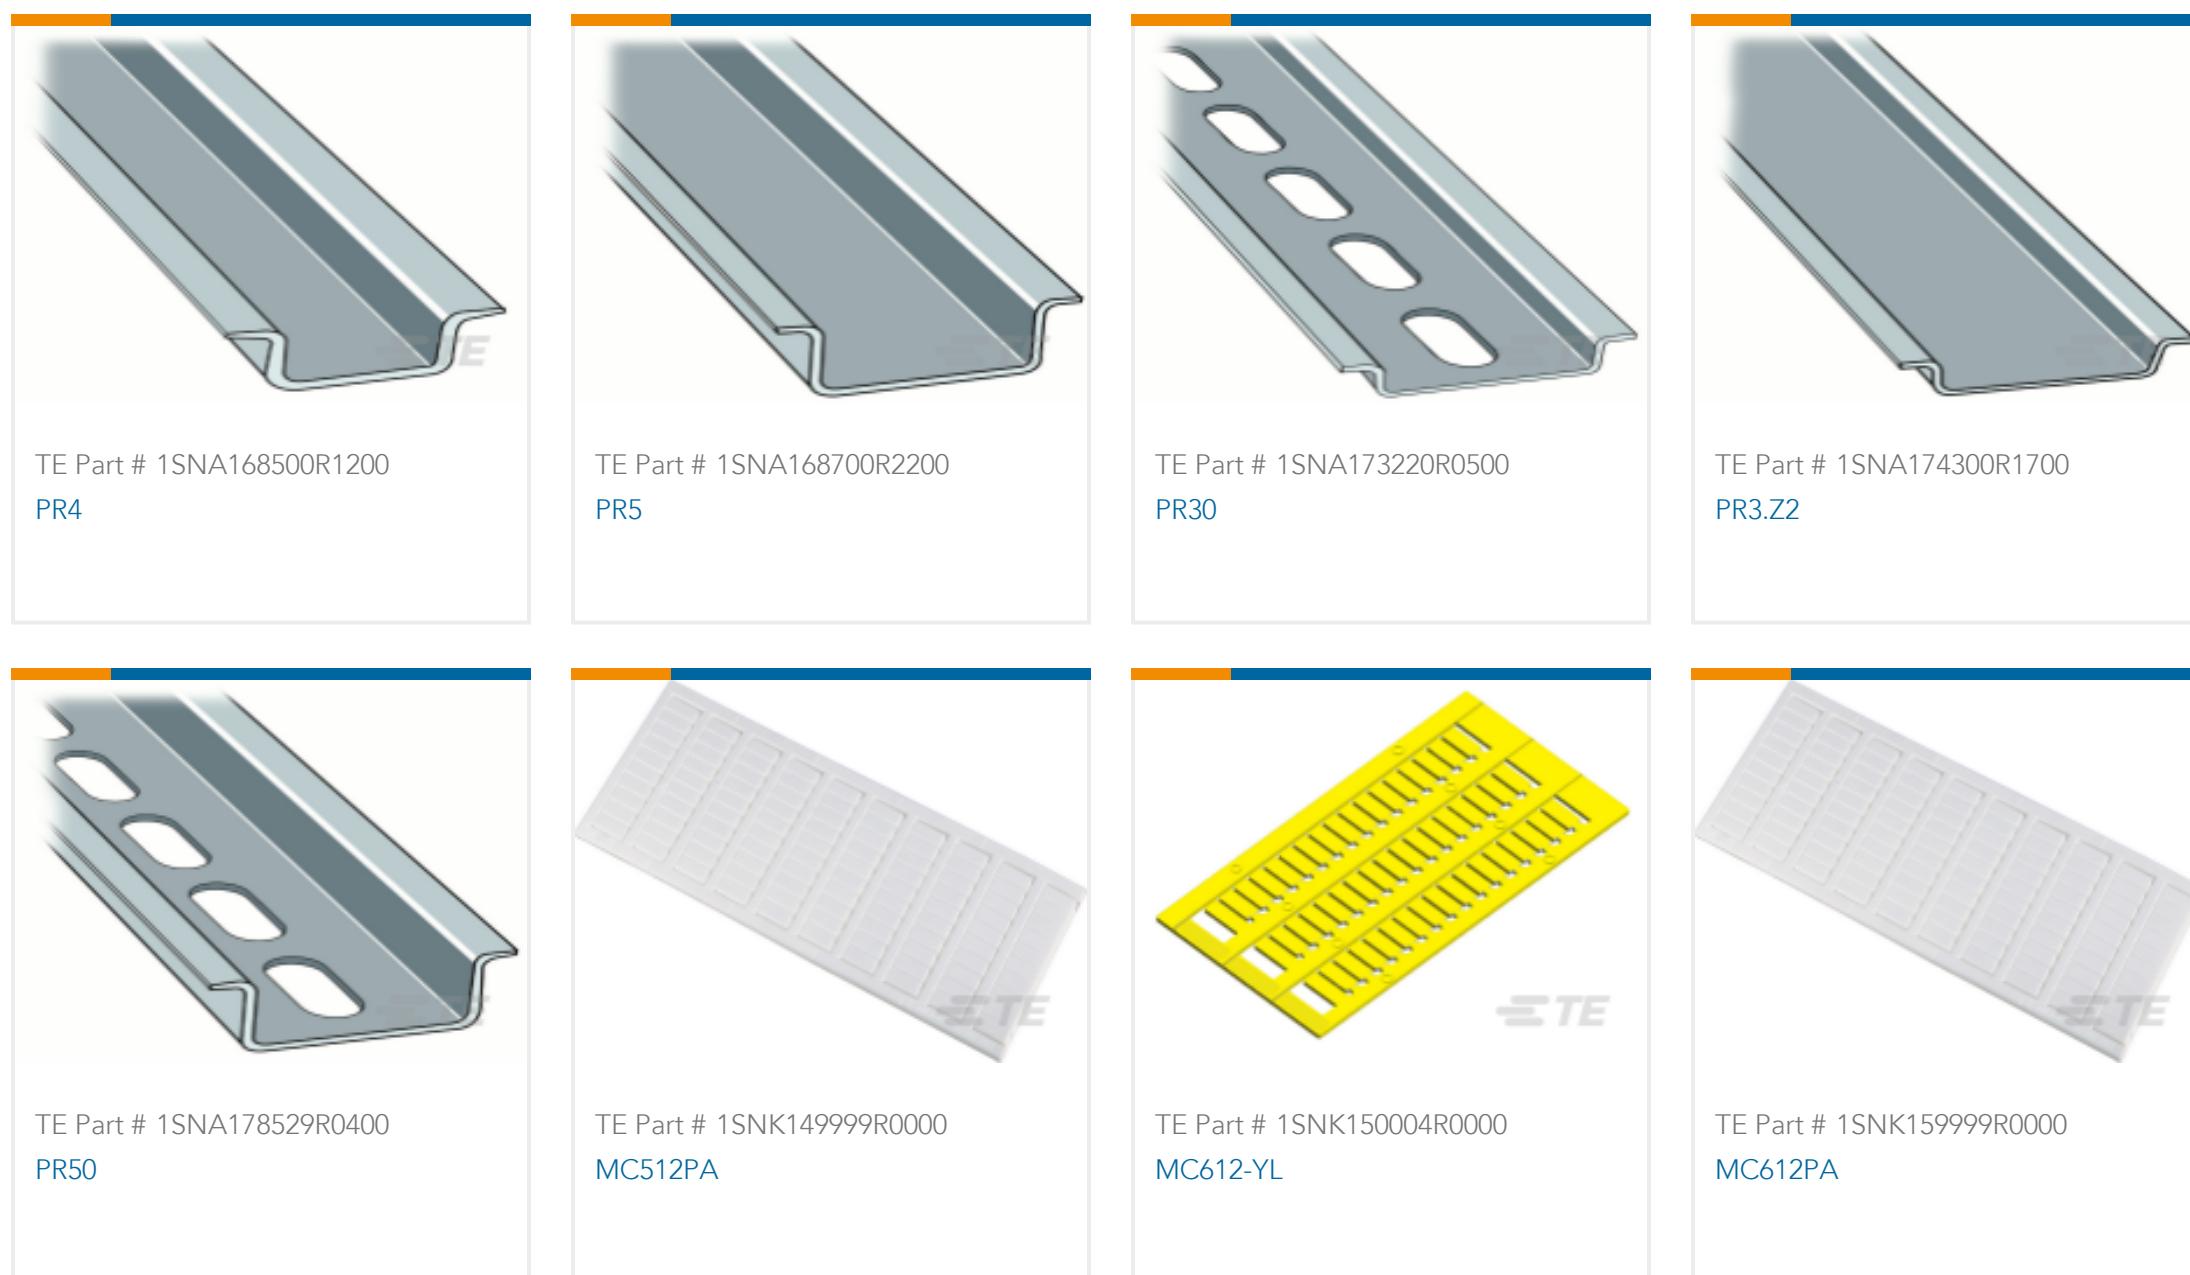



## Also in the Series

## ENTRELEC SNK

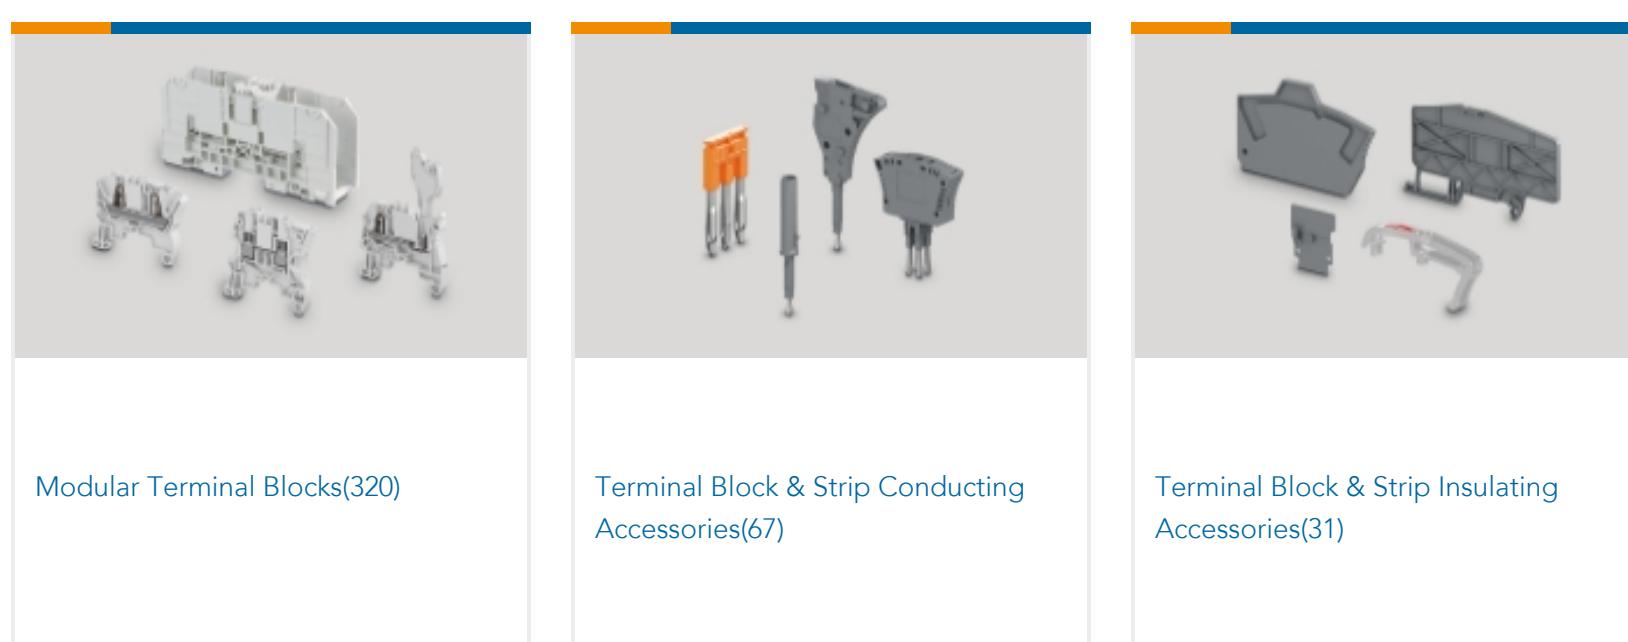

## Customers Also Bought

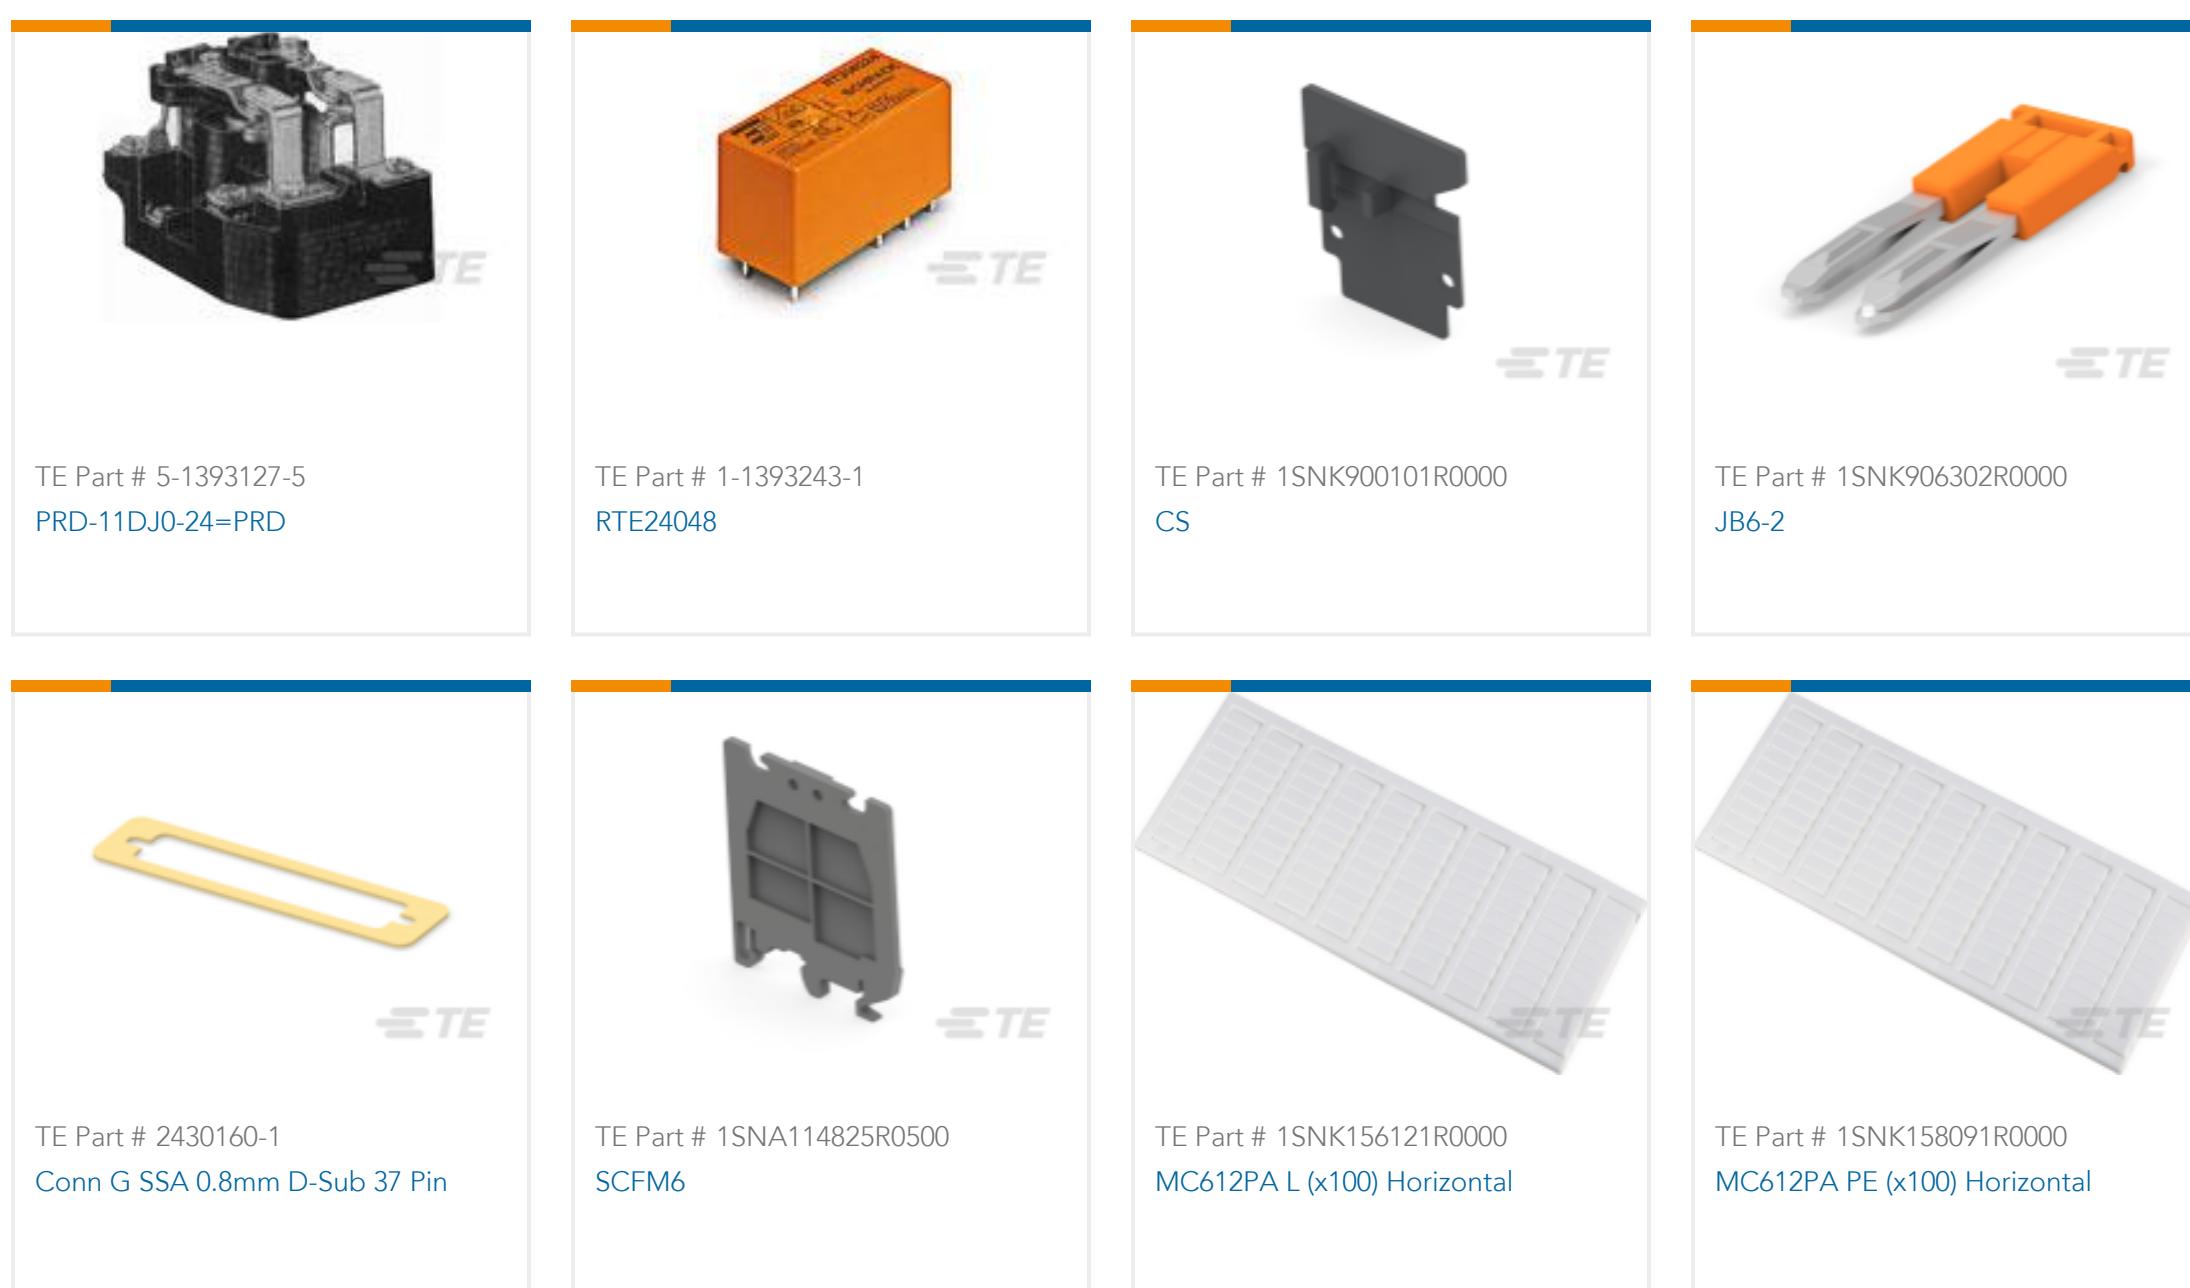

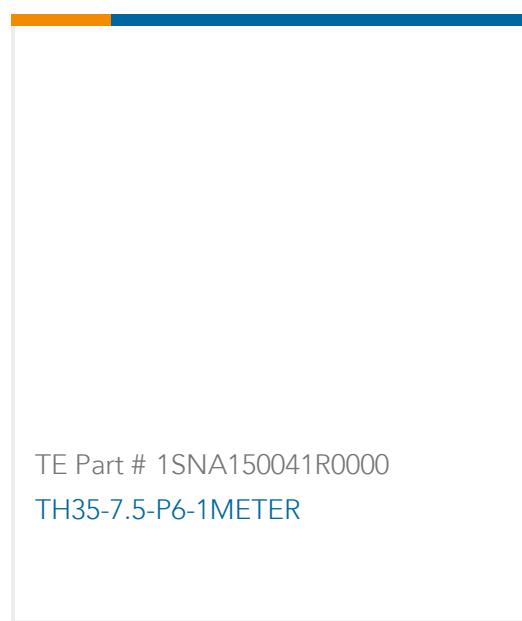

TE Part # 1SNA150041R0000  
TH35-7.5-P6-1METER

## Documents

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1SNK506152R0000\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1SNK506152R0000\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1SNK506152R0000\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[ENTRELEC Terminal Block - Master Catalog](#)

[ENTRELEC Terminal Block - Master Catalog](#)

English

[ZS6-4S-PE](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)

### Agency Approvals

[ZK-ZS\\_ATEX\\_1SND225112U1006-C-TE](#)

English