

HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel mounting base B24, with single locking latch, material: PA, protective cover material: PC, height: 30.5 mm, cable gland: none, protective cover: yes, Standard, with flat gasket

Your advantages

- Lower costs than metal version
- Low weight
- Lower risk of condensation

Commercial data

Item number	1407660
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF57
Product key	BF7APL
Catalog page	Page 632 (C-2-2019)
GTIN	4046356777230
Weight per piece (including packing)	151.1 g
Weight per piece (excluding packing)	142.6 g
Customs tariff number	85389099
Country of origin	PL

HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



Technical data

Notes

General	For contact inserts HC-B24, BB46, D64, DD108, M, K, HV10-I-PT, HV 10-E...C
---------	--

Product properties

Product type	Housing with locking latch
Housing type	Panel mounting base
Product family	HC-EVO-B
Application	Standard
Type	B24
Protective cover	yes
Pg screw connection	none

Dimensions

Dimensional drawing	
Width	53 mm
Height	30.5 mm
Length	140.5 mm
Drill hole distance, horizontal	130 mm
Drill hole distance, vertical	32 mm
Hole diameter	4.5 mm

Installation dimensions

Width of the assembly cutout	35 mm
Length of the assembly cutout	113 mm

Material specifications

Flammability rating according to UL 94	V0 (Housing)
	V0 (Interlock)
	V0 (Protective cover)
Seal material	NBR
	NBR
Housing material	PA
Material, protective cover	PC
Locking latch material	PA

Mechanical properties

Mechanical data	
Locking type	Latch

HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



Connection data

Tightening torque	0.8 Nm ... 1.2 Nm (For M4 mounting screws on the panel-mount base)
-------------------	--

Mounting

Assembly note	Not for D series terminal adapters Not for HC-B 24-ADP-B..... adapter plates
---------------	---

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66 (when plugged in or with locked protective cover)
Enclosure rating (NEMA)	12 (UL 50e)
Impact strength	IK08
Ambient temperature (operation)	-40 °C ... 125 °C

HC-EVO-B24-BWSC-PLRBK - Housing




1407660

<https://www.phoenixcontact.com/us/products/1407660>


Drawings

Dimensional drawing

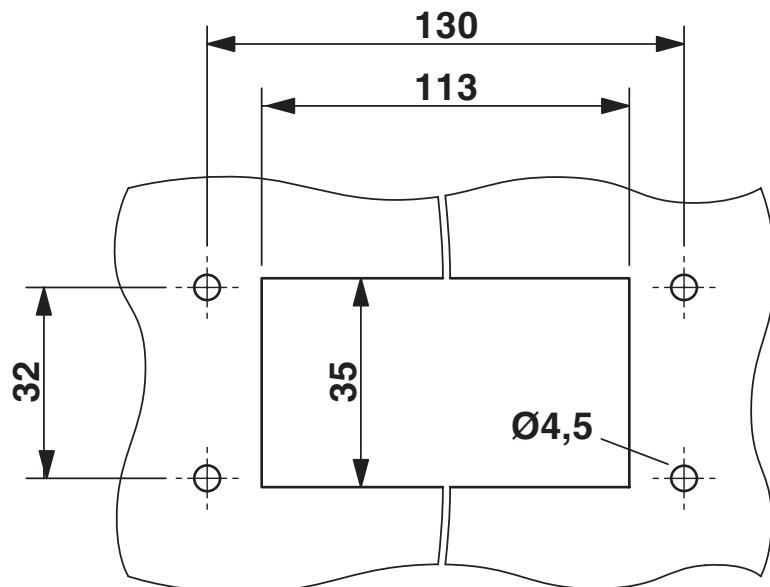

Mounting cutout

Dimensional drawing

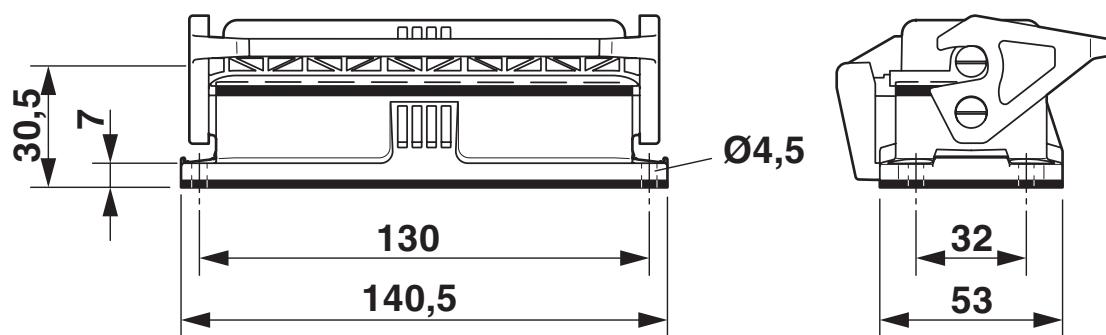

Dimensional drawing

HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1407660>

DNV

Approval ID: TAE000037S



EAC

Approval ID: RU C-DE.AI30.B.01102



EAC

Approval ID: RU C-DE.BL08.B.00511



cUL Recognized

Approval ID: E255026



UL Recognized

Approval ID: E255026

cULus Recognized

HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

HC-EVO-B24-BWSC-PLRBK - Housing



1407660

<https://www.phoenixcontact.com/us/products/1407660>

Accessories

HC-B24-SP-RBK - Profile gasket

1407709

<https://www.phoenixcontact.com/us/products/1407709>

Profile gasket for HEAVYCON EVO supporting base element type B24



HC-B24-SG-RBK - Flat gasket

1407705

<https://www.phoenixcontact.com/us/products/1407705>

Replacement flat gasket, for HEAVYCON EVO panel mounting base type B24



HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



HC-B24-SL-PLBK - Housing brackets

1407701

<https://www.phoenixcontact.com/us/products/1407701>

Replacement single locking latch for HEAVYCON EVO housing type B24, PA



HC-B24-BC-HI-PLBK - Protective cover

1407695

<https://www.phoenixcontact.com/us/products/1407695>

Protective cover B24, for single locking latch, protective cover material: PC, height: 19 mm, seal: no



HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



US-EMP (20X9) - Snap-in markers

0829439

<https://www.phoenixcontact.com/us/products/0829439>

Snap-in markers, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 20 x 9 mm, Number of individual labels: 70



US-EMP (20X9) CUS - Snap-in markers

0830028

<https://www.phoenixcontact.com/us/products/0830028>

Snap-in markers, can be ordered: by card, white, labeled according to customer specifications, mounting type: snapped into marker carrier, lettering field size: 20 x 9 mm, Number of individual labels: 70



HC-EVO-B24-BWSC-PLRBK - Housing

1407660

<https://www.phoenixcontact.com/us/products/1407660>



HC-STA-B24-DC-PL - Protective cover

1421103

<https://www.phoenixcontact.com/us/products/1421103>

Protective cover, design: B24



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com