

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

In Addition to GlobTek Inc.'s renewed ISO9001:2015 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2016 - Medical Devices Quality Management System Certification
ISO14001:2015 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://www.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies/battery packs if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:		
	Model No. GT-96600-7056-T3-PP		
	Part No./Ordering No. GT966007056-T3-PPOE		Rev E

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
E		QA	06/09/2020	QA
D	Update Technology in Power Supply Information from Single Port Power Over Ethernet Midspan (IEEE802.3af PoE PSE) to Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor. Update pinout to POE RJ45X2-B	svlas	10/02/2019	QA
C	Update pinout view from POERJ45X2 to POE2xRJ45	QA	06/21/2019	QA
B	Update grounding cofiguration from E1 to F3	QA	01/11/2019	QA
A	Initial Release	bsiep	01/08/2019	QA

POWER SUPPLY INFORMATION

TYPE	Desktop/External
TECHNOLOGY	Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor
CASE COLOR	GlobTek Black
NAMEPLATE RATED INPUT	100-240V~, 50-60 Hz, 2.0A
INPUT CONFIG	IEC 60320/C14
WATTS	70.00
VOLTS OUT	56.0
CURRENT OUT (Amps)	1.25
BLADE/CORD INCLUDED	None (Order Separately)
BLADE/CORD INSTALLED	None :(Order Separately)
INGRESS PROTECTION	
GROUNDING CONFIGURATION	(F3) Floating output, capacitor between output common and functional earth
EFFICIENCY LEVEL	USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782
OUTPUT CONFIGURATION	N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675
CONNECTOR PIN OUT	PoE injector wiring Data, Data+Power, RJ45 x 2
LABEL SPECS	Standard GT,L-1186
SPECIAL BARCODE LABEL MATERIAL	No
PACK SPEC	Standard DT, Cellular packaging, User manual
USER MANUAL	809-DESKTOPUSERMANUAL on A4 paper

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec)
DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE
RFP RFI-96657

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals: Model No. GT-96600-7056-T3-PP Part No./Ordering No. GT966007056-T3-PPOE Rev E
---	---

ELECTRICAL SPECIFICATIONS

GlobTek’s GT-96600-7056 Power over Ethernet Midspan Injector offers cost effective and reliable solution for remote powering of ethernet appliances up to 70 Watts over existing network infrastructure. GlobTek PoE Midspan Injector is configured to provide 70 watts of power over four pairs in per the IEEE 802.3 -2012 standard. When the load device is connected, GlobTek’s Passive PoE Midspan will immediately source power to the Powered Device. GlobTek’s 56V Passive PoE Injector is designed to function with and provide power to any device.

MAIN FEATURES

- Cost Effective Passive PoE, supplies continuous power without requiring handshaking communications
- Passive PoE models can transfer 10/100/1000 BaseT Data Rates (Gigabit compatible)
- Simple PoE models can transfer 10/100 BaseT Data Rates
- Green Design: Compliant to DoE Efficiency level VI requirement
- Universal Input Power from 100Vac to 240Vac
- Full Protection for Over Voltage and Current
- Compact 164 x 55 x 35 mm
- LED User Interface to show output power availability

APPLICATIONS

- High Power use, PoE powered equipment
- VoIP Phone with Video
- Wireless Access Points
- Bluetooth Access Points
- Multi-Band Wireless Access Points
- Network Security Cameras
- Point of Sales
- Industrial Controllers
- Electronic Time Card Readers
- Building Security Systems
- Network Camera with Pan, Tilt and Zoom Features
- Electronic Signs
- RFID Readers
- Motion Sensors
- HVAC Controllers
- Magnetic Card Readers
- PDAs
- Digital Time clock

A) ELECTRICAL SPECIFICATIONS:

INPUT

Input Range: 90-264 Vac (85-264Vac rating @ 85% of rated output power)

Input Line Frequency: 47-63Hz

Input Current:< 2A RMS @ 90Vac Full Load

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals: Model No. GT-96600-7056-T3-PP Part No./Ordering No. GT966007056-T3-PPOE
	Rev E

Inrush Current: 30A max, Cold Start @ 25°C at 230Vac
No load Power: < 210mW
Efficiency: >88%, 4 Point Avg efficiency.
Turn on-delay: 1 Second Typical @ 115Vac
Input Line Surge/Lightning Protection: 10mm dia, 300Vac MOV protected, 3500A pk current rated
Hold-up time: 8ms typical at nominal input voltage and full load
Leakage current: <100uA
Isolation: 3000 VAC

OUTPUT

Power Injection Pins
Channel 1: 4&5 for V+ and 7&8 for V-
Channel 2: 3&6 for V+ and 1&2 for V-
Output Voltage: 56V
Output Power: 70W Max
Output Voltage Regulation: +/-3%, and less than 57Vdc
Output Voltage Ripple: 100mVpp max
Output Line Lighting Protection: 2X SMAJ58A Transient Surge Protection, per 802.3 standard

ENVIRONMENTAL

Temperature: Operating, -10C to 40C
Storage, -30C to 80C
Humidity: 0% to 95% Relative Humidity, Non-Condensing
Altitude: Operating, Up to 5000M

MECHANICALS

Dimensions: 164 x 55 x 35 mm
Weight: 0.59 lb, 264 gr.
AC Input Connector: IEC 320 Inlet, C14, C8, C6 or C18 Style
Data and Data+Power Connector: Fully Shielded RJ45

EMISSIONS and IMMUNITY

Emission: Designed to meet FCC Class B Part 15, EN55022 Class B
Immunity: Designed to meet the following;
EN 61000-4-2 ESD
EN 61000-4-3 Radiated Immunity
EN 61000-4-4 EFT
EN 61000-4-5 Surge
EN 61000-4-6 Conducted Susceptibility
EN 61000-4-11 Voltage Dips and Interrupts
EN 61000-3-2 Harmonics, Class A

SAFETY APPROVALS

Safety UL/cUL 60950-1, EN 60950-1, CE

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

INTEROPERABILITY: Passive and Simple 48V and 56V models work with all types of AF and AT Splitters and PoE appliances with appropriate input power requirements

SPECIAL OPTIONS

- 1. Custom Markings
- 2. Reduced output power rating

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

3. High Rel PCB laminate with Plated through Holes for IPC610 Class 2 Compliance
4. Special Housing Colors


TO ADDRESS SYSTEM-LEVEL EMI CONCERNS, FERRITE CHOKES/BEADS MAY BE ADDED/REVISED UPON REQUEST. A SAMPLE KIT OF GLOBTEK’S STANDARD FERRITES IS AVAILABLE UNDER GLOBTEK P/N: EMI-MITIGATION-KIT1

FOR ADDITIONAL INFORMATION, PLEASE READ OUR WHITE PAPER AT: <https://r.globtek.info/3QeaqtD>

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

3D File Download <https://www.globtek.com/file/dl/GT-96600-7056-T3-PP.zip>

Mechanical drawing

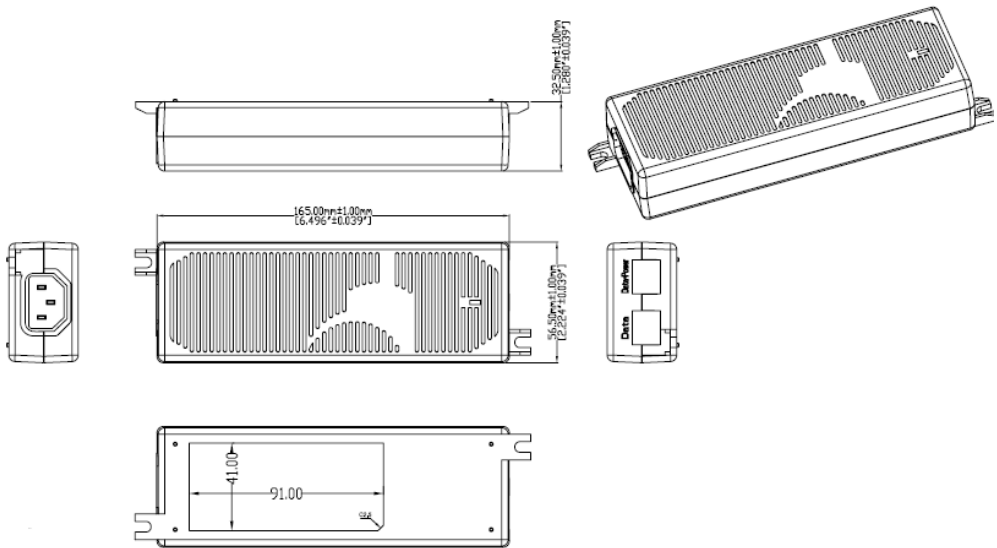

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:		
	Model No. GT-96600-7056-T3-PP		
	Part No./Ordering No. GT966007056-T3-PPOE		Rev E

70W PoE Injector, Ethernet InterOperability and Compatibility Testing

Injector tested: *Model GT-96600-7056*, rated 70W output, 56Vdc, IEEE802.3-2012 Compliant

Note, assuming 80% eff splitter, max Pout = 56W (56/70 = 0.8)

Splitter Model	Splitter Description	P/F	Notes:
Globtek GT-91087	5V, af Type	P	Low power type, tested at 7.5W load
PowerDSIne PD-AS-601/5	5V, af Type	P	
Linksys POEES5	5V, af Type	P	
Axis 5008-001-02	5V, af Type	P	
PowerDSIne PD-AS-701/12	12V, af type	P	24W rating, tested at 24W load
Phihong POE21-120-R	12V, at type	P	21W rating, tested at 21W load
PowerDSIne PD-AS-951/12-24	12V, DLL Classification	P	4 Pair, 54W rating, tested at 48W load
Phihong POE45-120-R	12V, 12.5K Classification	P	4 Pair, 45W rating, tested at 40W load
Hi-Power PS-1206G	12V, MSC201 Classifica.	P	4 Pair, 51W rating, tested at 48W load

100BaseT/1000 Base T network digital transmission testing

(During testing ethernet communications is passed thru Injector and then Splitter and then to a computer)


Injector tested: *Model GT-96600-7056*, rated 70W output, 56Vdc, IEEE802.3-2012 Compliant

Injector is Gigabit designed and tested, to 100 Base T and 1000 Base T

Splitter Model	Splitter Description	P/F	Notes:
Axis 5008-001-02	100 Base T rating	P	Limited bandwidth splitter
PowerDSIne PD-AS-701/12	1000 Base T rating	P	Full bandwidth splitter

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals: <tr> <td data-bbox="302 285 1382 317"> Model No. GT-96600-7056-T3-PP </td><td data-bbox="1382 285 1544 317"></td></tr> <tr> <td data-bbox="302 317 1382 363"> Part No./Ordering No. GT966007056-T3-PPOE </td><td data-bbox="1382 317 1544 363"> Rev E </td></tr>	Model No. GT-96600-7056-T3-PP		Part No./Ordering No. GT966007056-T3-PPOE	Rev E
Model No. GT-96600-7056-T3-PP					
Part No./Ordering No. GT966007056-T3-PPOE	Rev E				


DERATING CURVE

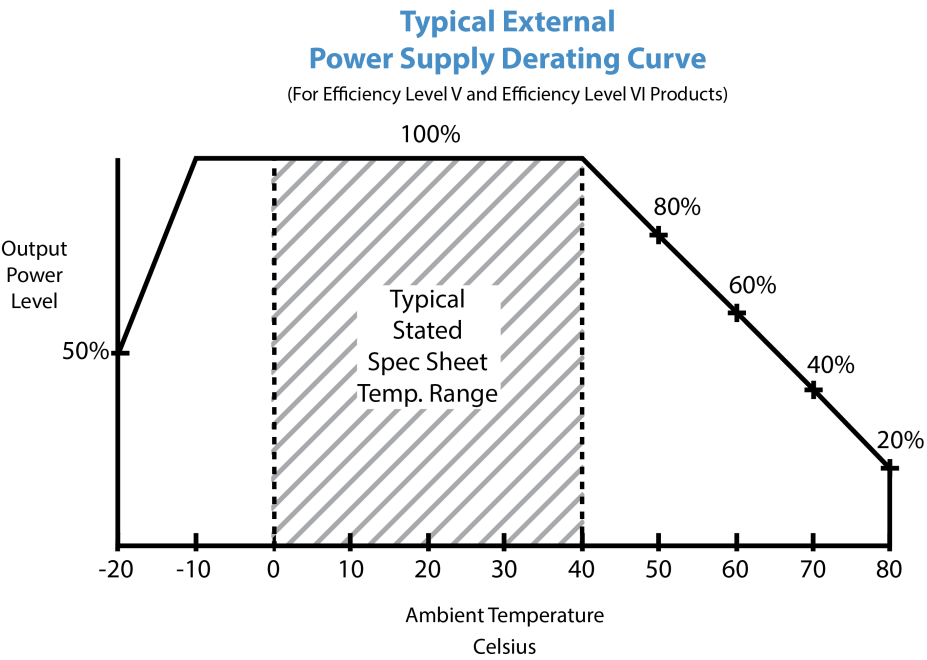

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

INPUT CONFIGURATION


(F3) Floating output, capacitor between output common and functional earth

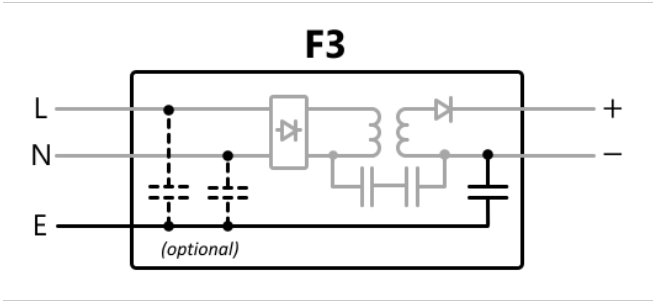

[Alternate grounding configurations](#) available upon request.

Blades/Cord Included:None:(Order Separately)
Blades/Cord Installed:None:(Order Separately)

T3 Inlet (IEC 60320/C14)
IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground



Mates with IEC 60320/C13 Plug

Optional Locking IEC60320 Receptable and cord option available on some models by request.:



[Standard International IEC 320/C13 Cordsets](#)

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or packaged with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:				
	Model No. GT-96600-7056-T3-PP				
	Part No./Ordering No. GT966007056-T3-PPOE				Rev E

Stock Power Supply Cords

Part Number/ Link	Country	Plug	Termination	Length (mm)	(Ft)
3021457F701(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C13	2150	7
1191068F0701(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C13	2459	8
2194272M5701-T(R)	Argentina (Type I)	IRAM 2073	IEC 320/C13	2500	8
5502022M5701A(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C13	2500	8
204B4272M5701(R)	Brazil (Type N)	BRAZIL	IEC 320/C13	2500	8
6023602M5701(R)	China (Type I)	CCC GR2099	IEC 320/C13	2500	8
G8014272M5701(R)	Danish (Type K)	AFSNIT SECTION 107-2-D1	IEC 320/C13	2500	8
23144272M5701-T(R)	Europe (Type E)	CEE 7/7	IEC 320/C13	2500	8
23134272M5701EUKR(R)	Europe/Korea Combo (Type E)	CEE 7/7 / KSC8305	IEC 320/C13	2500	8
205IN4272M5701(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8
208IN4272M5701(R)	India (Type M)	India IS 1293 (also known as IA16A3 or BS546)	IEC320/C13	2500	8
377C4272M5701(R)	Israel (Type H)	ISL 377C	IEC 320/C13	2500	8
23024272M5701(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C13	2500	8
3003339F701(R) [3x1.25mm2]	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C13	2500	8
3003068F2701-HK(R) [3 x 2.0mm2]					
302J115J6F0701J(R)	North America / Japan (Type B – 12A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302J104J6F0701J(R)	North America / Japan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302JT104J9F0701JT(R)	North America / Japan / Taiwan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved)	IEC 320/C13	2800	9
2313K3432M5701(R)	Korea (Type F)	KS C 8305	IEC 320/C13	2500	8
5804272M5701(R)	Russia (Type F)	GOST 7396	IEC 320/C13	2500	8
2084272M5701(R)	South Africa (Type M)	South Africa SABS164-1 (16A type)	IEC 320/C13	2500	8
23214272M5701(R)	Switzerland (Type J)	SEV 1011	IEC 320/C13	2500	8
3003322M5701(R)	Taiwan (Type B)	BSMI	IEC 320/C13	2500	8
6363762M5701(R)	Thailand (Type O)	TIS 166-2549	IEC 320/C13	2500	8
PZ0800100-2M5BK13H(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS 1363A	IEC 320/C13	2500	8
7055002M5701A(R)	International	IEC 320 C14-C13	IEC 320/C13	2500	8

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN Page 12 of 20
WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2017 - 2024
quest / 06/04/2024 10:47:07 AM GMT CLONED FROM GT966007056-T3-APOE

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

OUTPUT CORD AND CONNECTOR: RJ452JACK/C1675

ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW

CABLE TYPE	N/A
CABLE LENGTH (mm)	N/A
CABLE TOLERANCE (mm)	N/A
WIRE GAUGE (AWG)	N/A
CONDUCTORS	
HANK DIMENSION (mm)	N/A
CABLE / CONNECTOR OVERMOLD COLOR	GlobTek Black
FERRITE TYPE AND DIMENSION	None
FERRITE NUMBER OF TURNS(Definition)	N/A
FERRITE DIMENSION FROM STRAIN RELIEF	N/A
FERRITE DIMENSION FROM PLUG	N/A
PLUG TYPE	2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration
OVER MOLD ORIENTATION	Straight
CONNECTOR PIN OUT	PoE injector wiring Data, Data+Power, RJ45 x 2

ADDITIONAL OUTPUT PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/en/connectors>
STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/en/connectors>
CALCULATE VOLTAGE REGULATION/DROP WITH OUR ONLINE CALCULATOR: <https://www.globtek.com/r2/PtgjL>

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

OUTPUT CONNECTOR HOOK UP

TO ADDRESS SYSTEM-LEVEL EMI CONCERNS, FERRITE CHOKES/BEADS MAY BE ADDED/REVISED UPON REQUEST. A SAMPLE KIT OF GLOBTEK'S STANDARD FERRITES IS AVAILABLE UNDER GLOBTEK P/N: EMI-MITIGATION-KIT1


FOR ADDITIONAL INFORMATION, PLEASE READ OUR WHITE PAPER AT:
<https://www.globtek.com/en/technical-articles/ferrite-kit-radiated-emi-suppression-kit-for-globtek-power-supplies-cable-assemblies>

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

LABEL:L-1186

LABEL P/N	Standard GT
MATERIAL	Flat Thermal Transfer, Imprintable, Polyester Label and/or Pad Printed and/or Molded, and/or Laser Engraved in the case
BACKGROUND COLOR	Black if housing is Black, White or Silver if housing is White or Gray.
TEXT COLOR	White or Silver if label is Black Background for Black housing. Black if label is White or Silver background and Housing is White or Gray.
SPECIAL BARCODE LABEL MATERIAL	No

Below is the minimum information which will appear on the label. NOTE: in the logo area additional/actual positioning of symbols and text is subjected to change as per agency updates/requirements or additional model approvals become available.
Regulatory certifications/label markings may be in logo area on the label or molded into the case housing outside the label area.
Information will be shown via label and/or pad printed and/or molded and/or laser engraved in the case. * Date code markings at GlobTek option

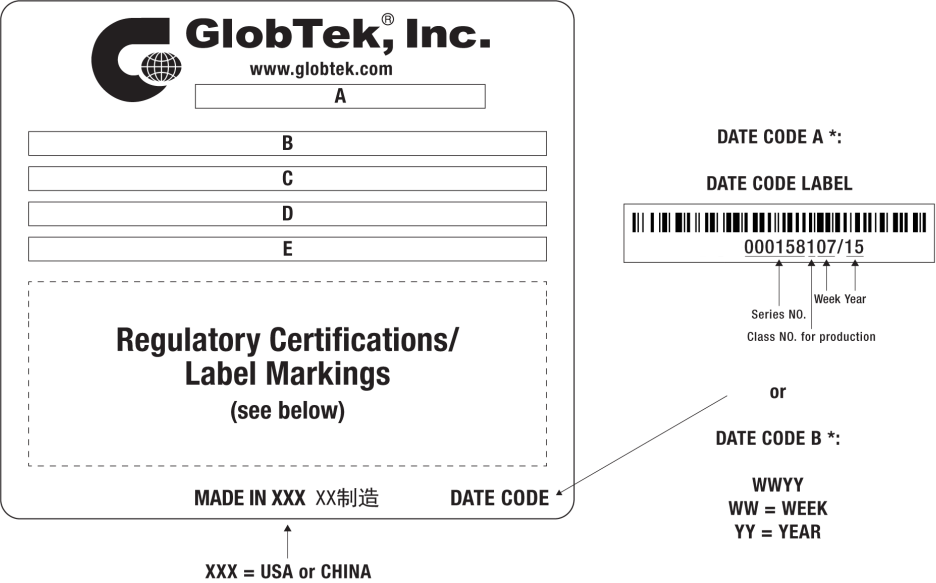

A=ICT/ITE Power Supply
B=P/N: (料号) GT966007056-T3-PPOE
C=Model (型号) GT-96600-7056-T3-PP
D=Input (输入)100-240V~, 50-60 Hz, 2.0A
E=Output (输出)56.0 V == 1.25 A, 70.00W

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals: Model No. GT-96600-7056-T3-PP Part No./Ordering No. GT966007056-T3-PPOE
	Rev E

AGENCY ONLINE DOCUMENTS	http://www.globtek.info/certs/GT-96600/
CE EC-Declaration for Medical	Contact GlobTek for more information
CE EC-Declaration for Industrial/Commercial/ITE	https://cs.globtek.info/ec_declaration_product?id=01ta0000007fdDP&i=2
CE EC-Declaration for Household	Contact GlobTek for more information
UKCA-Declaration for Medical	Contact GlobTek for more information
UKCA-Declaration for Industrial/Commercial/ITE	https://cs.globtek.info/ukca_declaration_product?id=01ta0000007fdDP&i=2
UKCA-Declaration for Household	Contact GlobTek for more information
Morocco SDoC Declaration	https://cs.globtek.info/Morocco_SDoC_Declaration?id=a0Oa000000FkH0IEAF
RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01ta0000007fdDPAAY
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf
Prop 65 Statement	https://www.globtek.com/prop-65-statement.pdf
IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.	

Regulatory Certifications/Label Markings

Below follows a link to the latest regulatory certifications and marks for this specific product. National standards as well as certification schemes are constantly changing and so is the set of certification marks and symbols applicable to this product. Various standards, marks and symbols, and certificates are subject to change at any time without notice.


Additional standards or unique country certifications are available upon request. Please contact Globtek to request a quotation.

LATEST PRODUCT/MODEL CERTIFICATIONS: <https://www.globtek.com/ds/ViXNUaNMGWc/UDjceP67LEJ.html>

AGENCY ONLINE DOCUMENTS <http://www.globtek.info/certs/GT-96600/>



(F3) Floating output, capacitor between output common and functional earth



PoE injector wiring Data, Data+Power, RJ45 x 2


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals: Model No. GT-96600-7056-T3-PP Part No./Ordering No. GT966007056-T3-PPOE
	Rev E

PACKAGING

Packing Spec P/N	Standard DT, Cellular packaging, User manual
Box Qty	20
Gift Box Size (mm)	Egg crate
Gift Box Color	White
Master Carton Size (mm)	405 x 427 x 158
Master Carton Cubic Volume (m³)	0.03
Master GW (Kg)	kg
BLADES INCLUDED	None: (Order Separately)
BLADE/CORD INSTALLED	None: (Order Separately)
USER MANUAL*	809-DESKTOPUSERMANUAL on A4 paper
USER MANUAL WEB LINK	https://www.globtek.com/pdf/809-DESKTOPUSERMANUAL.jpg

* This specification sheet is considered the user manual for all applications. It is expected that the buyer of this product will use it to formulate their own user manual for their end product and a user manual specifically for the power adapter is not usually required. If a user manual is not specifically listed above then none will be provided with this unit.

If specific packaging is required, this section must specify all requirements and note "no exceptions". If this section does not specify packaging, it is subject to change without notice at GlobTek's discretion.

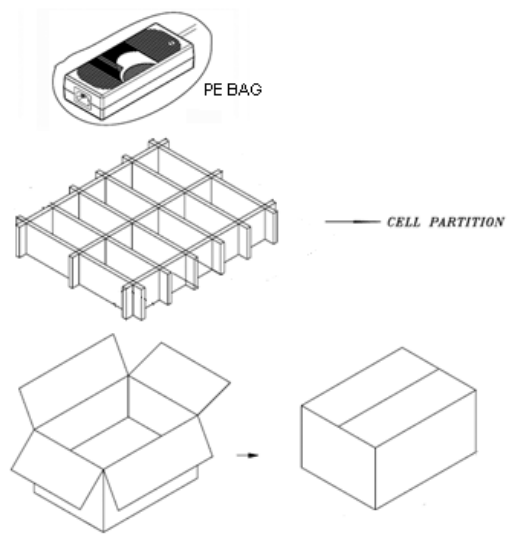

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

INSTRUCTIONS TO THE OEM SYSTEMS ENGINEER

It is the responsibility of the OEM systems engineer to provide the end system user instructions and warnings for the use of this product in the end system.

If an input cord is required for this product, AC Mains voltage should be provided to the power supply by a power supply cord approved to the national standards of the country in which it will be used.

This product is not designed to be repaired. No serviceable parts inside. A blown internal fuse is an indication of catastrophic failure of circuit component(s). If a Failure Analysis is required for a failed power supply/battery charger, please return the damaged unit to GlobTek for an accurate determination of the root cause of the failure.

EMC Compliance of the complete OEM product, including the GlobTek power supply/battery charger needs to be verified by the OEM systems engineer.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

INSTRUCTION SHEET

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-96600-7056-T3-PP, ICT/ITE Power Supply, Efficiency Level: USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782, Case Color/Style: GlobTek Black, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, , Output Rating: 70.00W, 56.0V@1.25A, Pin Out: PoE injector wiring Data, Data+Power, RJ45 x 2, Output Configuration: N/A mm, N/A/ Cond, N/A, 2 x RJ-45 Jacks mounted in 94V-0 enclosure per IEEE 802.3af configuration, Ferrite: None, GlobTek Black, GT Cord # C1675, Blades/Input Cord: (Order Separately), Approvals:	
	Model No. GT-96600-7056-T3-PP	
	Part No./Ordering No. GT966007056-T3-PPOE	Rev E

