



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Modular Terminal Block Product Type: **Female Plug**
Primary Product Color: **Gray**
Product Spacing: **5.2 mm [.205 in]**
Number of Positions: **2**
Operating Temperature Range: **-55 - 110 °C [-67 - 230 °F]**

Features

Product Type Features

Modular Terminal Block Product Type	Female Plug
-------------------------------------	-------------

Configuration Features

Gauge Type	A2 / 2.3 mm Dia.
Number of Poles	1
Number of Positions	2

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	22 A
Power Loss	.4 W
Dielectric Withstanding Voltage (Max)	2200 V
Short-Time Withstanding Current Rating @ 1s	300 A
Voltage Rating (IEC)	1000 V



Current Rating (UL)	22 A
---------------------	------

Current Rating (IEC)	24 A
----------------------	------

Body Features

Product Weight	2.76 g[.11 oz]
----------------	----------------

Primary Product Color	Gray
-----------------------	------

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.2 - 4 mm²
---	------------

Main Circuit Capacity - Twin Ferrule per Spring Clamp	.22 - .5 mm²
---	--------------

Wire Stripping Length	11 mm[.433 in]
-----------------------	----------------

Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.22 - 2.5 mm²
--	---------------

Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 - 14 AWG
--	-------------

Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 - 2.5 mm²
---	---------------

Tool Size	3.5 mm[.138 in]
-----------	-----------------

Product Depth	36.2 mm
---------------	---------

Product Length	18.5 mm
----------------	---------

Product Height	19.1 mm
----------------	---------

Product Spacing	5.2 mm[.205 in]
-----------------	-----------------

Usage Conditions

Installation Temperature Range	-5 - 40 °C[23 - 104 °F]
--------------------------------	-------------------------

Operating Temperature Range	-55 - 110 °C[-67 - 230 °F]
-----------------------------	----------------------------

Industry Standards

IP Rating	IP20
-----------	------

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	
--	--



Current ECHA Candidate List: JAN 2024
(240)
Candidate List Declared Against: JAN 2024
(240)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1SNK140000R0000
MC512

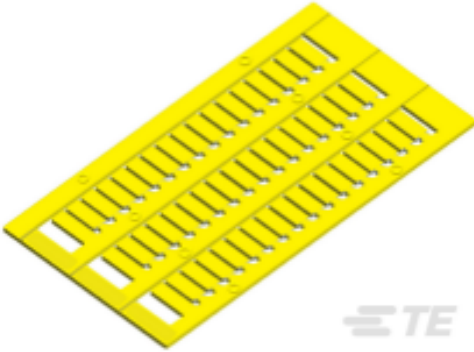

TE Part # 1SNK140004R0000
MC512-YL

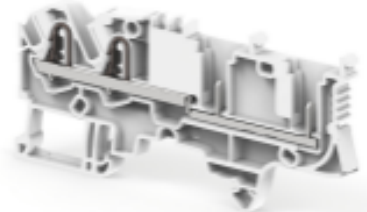


TE Part # 1SNK805010R0000
ZDK2.5-22



TE Part # 1SNK805015R0000
ZDK2.5-11



TE Part # 1SNK805017R0000
ZD2.5-22

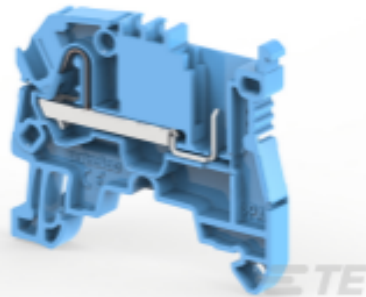

TE Part # 1SNK805025R0000
ZDK2.5-11-BL






TE Part # 1SNK805150R0000
ZDK2.5-11-PE




TE Part # 1SNK805152R0000
ZDK2.5-22-PE

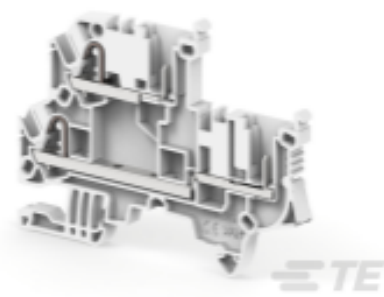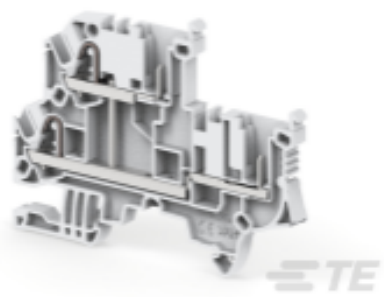



 TE Part # 1SNK805156R0000 ZD2.5-22-PE	 TE Part # 1SNK805212R0000 ZDK2.5-D2-PE	 TE Part # 1SNK805213R0000 ZDK2.5-D2	 TE Part # 1SNK805214R0000 ZDK2.5-D1
 TE Part # 1SNK805223R0000 ZDK2.5-D2-BL	 TE Part # 1SNK805250R0000 ZDK2.5-D1-PE	 TE Part # 1SNK900637R0000 VR-ZD	 TE Part # 1SNK900660R0000 PT-ZD
 TE Part # 1SET111001R0000 WF003-08-GN	 TE Part # 1SET111002R0000 WF005-08-WH	 TE Part # 1SET111003R0000 WF007-08-BL	 TE Part # 1SET111005R0000 WF010-08-RD

Also in the Series | ENTRELEC SNK

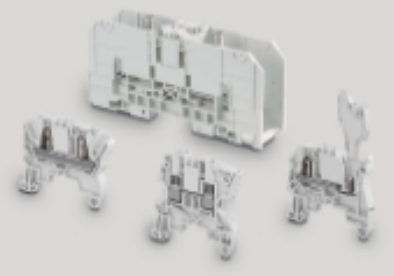 Modular Terminal Blocks(320)	 Terminal Block & Strip Conducting Accessories(67)	 Terminal Block & Strip Insulating Accessories(31)
---	--	--

Customers Also Bought

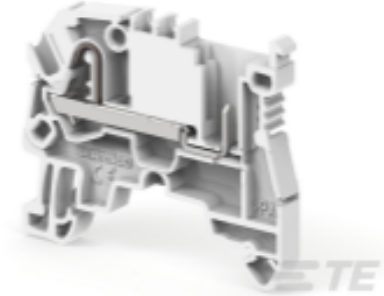 TE Part # 1SNK505010R0000 ZS4	 TE Part # 1SNK505212R0000 ZS4-T3	 TE Part # 1SNK505961R0000 ES4-T3	 TE Part # 1SNK805015R0000 ZDK2.5-11
---	--	--	---

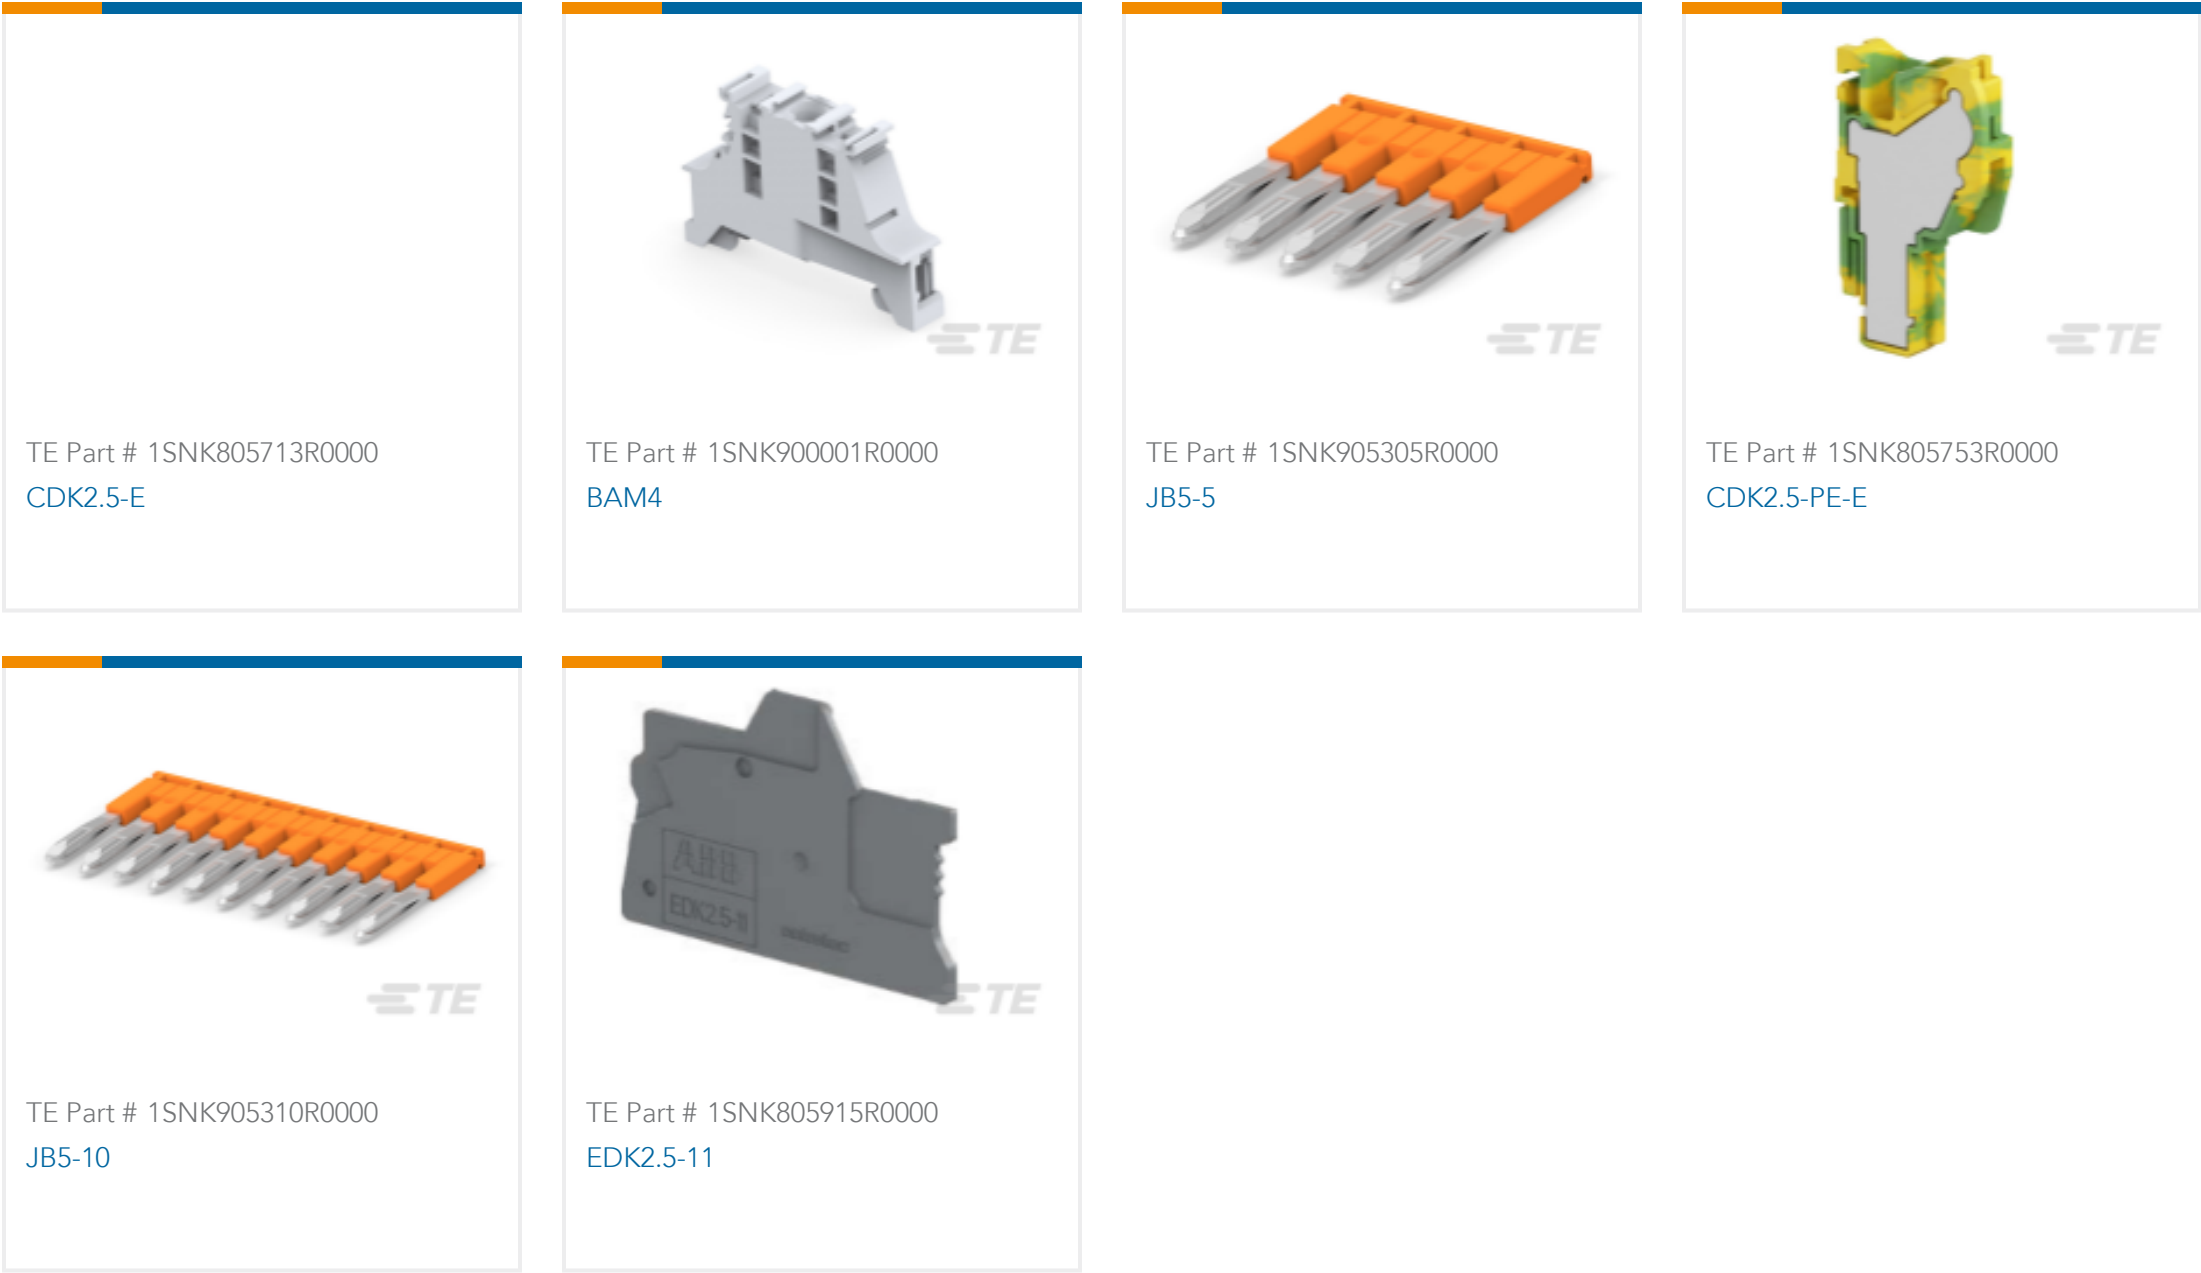

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_1SNK805712R0000_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK805712R0000_A1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1SNK805712R0000_A1.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

CDK2.5

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

1SNK805712R0000

Modular Terminal Blocks, Female Plug, Gray, Product Spacing .205 in [5.2 mm], 2
Position, -55 - 110 °C [-67 - 230 °F], ENTRELEC SNK



English

[Essential Entrelec Terminal Blocks](#)

Japanese

[Agency Approvals](#)

[Bureau Veritas Marine and Offshore Certificate](#)

English