


RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Test disconnect terminal block, Note: the BE-RT... path extension is to be used for non-insulated cable lugs (see accessories), nom. voltage: 1000 V, nominal current: 41 A, 1 level, connection method: Bolt connection, Rated cross section: 6 mm², mounting: NS 35/7,5, NS 35/15, color: gray

Your advantages

- The special clamping nuts can be actuated with a normal screwdriver
- Large-surface labeling options in the terminal center and above the terminal points
- Quick and easy connection with fold-up hinged covers which hold the clamping nuts captive. With the covers folded open, the bolt is free to accept the cable lugs
- After closing and engaging the covers, the clamping nut automatically aligns with the threaded bolt and can be tightened easily.
- Easy bridging and potential distribution using the patented plug-in bridges from the CLIPLINE complete system
- The screws are secured against loosening by captive spring-loaded spacers
- The use of the switching lock effectively prevents unintentional switching
- The hinged cover covers the live metal parts including the insulated cable lugs in the clamping area so that they are touch proof
- Testing with the standardized test adapters and test plugs of the CLIPLINE complete system
- Tested for railway applications

Commercial data

Item number	3049039
Packing unit	25 pc
Minimum order quantity	25 pc
Sales key	BE43
Product key	BE4333
Catalog page	Page 382 (C-1-2019)
GTIN	4046356139991
Weight per piece (including packing)	50.774 g
Weight per piece (excluding packing)	46.88 g
Customs tariff number	85369010
Country of origin	CN

RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



Technical data

Notes

General	Note: the BE-RT... path extension is to be used for non-insulated cable lugs (see accessories).
---------	---

Product properties

Product type	Bolt connection terminal block
Product family	RT
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²

1 level

Stripping length	The stripping length depends on the specification provided by the cable lug manufacturer.
Connection in acc. with standard	IEC 60947-7-1
Nominal current	41 A
Maximum load current	41 A (with 6 mm ² conductor cross section)
Nominal voltage	1000 V (Rated voltage for open disconnect point 500 V)
Nominal cross section	6 mm ²

Disconnect slide

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm

Cable lug connection DIN 46234:1980-03

Connection in acc. with standard	DIN 46234:1980-03
Cross section	0.5 mm ² ... 6 mm ²
Cross section range AWG	20 ... 10 (converted acc. to IEC)
Hole diameter	5.3 mm

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

Width	10 mm
Bolt diameter	5 mm
Screw thread	M5
Tightening torque	2.5 ... 3 Nm
Connection in acc. with standard	DIN 46237:1970-07
Cross section	1 mm ² ... 6 mm ²
Cross section range AWG	18 ... 10 (converted acc. to IEC)
Hole diameter	5.3 mm
Width	10 mm
Bolt diameter	5 mm
Screw thread	M5
Tightening torque	2.5 ... 3 Nm
Identification color of ring cable lugs : red	1 mm ²
Identification color of ring cable lugs : blue	2.5 mm ²
Identification color of ring cable lugs : yellow	6 mm ²

Dimensions

Width	16.3 mm
End cover width	2.2 mm
Height	91.4 mm
Depth on NS 35/7,5	51 mm
Depth on NS 35/15	58.5 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test	
Test voltage setpoint	7.3 kV

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

Result	Test passed
Temperature-rise test	
Requirement temperature-rise test	Increase in temperature \leq 45 K
Result	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Result	Test passed
Power-frequency withstand voltage	
Test voltage setpoint	1.89 kV
Result	Test passed
Mechanical properties	
Mechanical data	
Open side panel	Yes
Mechanical tests	
Mechanical strength	
Result	Test passed
Attachment on the carrier	
DIN rail/fixing support	NS 35
Test force setpoint	5 N
Result	Test passed
Environmental and real-life conditions	
Needle-flame test	
Time of exposure	30 s
Result	Test passed
Oscillation/broadband noise	
Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5$ Hz to $f_2 = 150$ Hz
ASD level	$1.857 \text{ (m/s}^2\text{)}^2/\text{Hz}$
Acceleration	0.8g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed
Shocks	
Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
Screw thread	M4

RT 5-T - Test disconnect terminal block


3049039

<https://www.phoenixcontact.com/us/products/3049039>



Drawings

Connection diagram

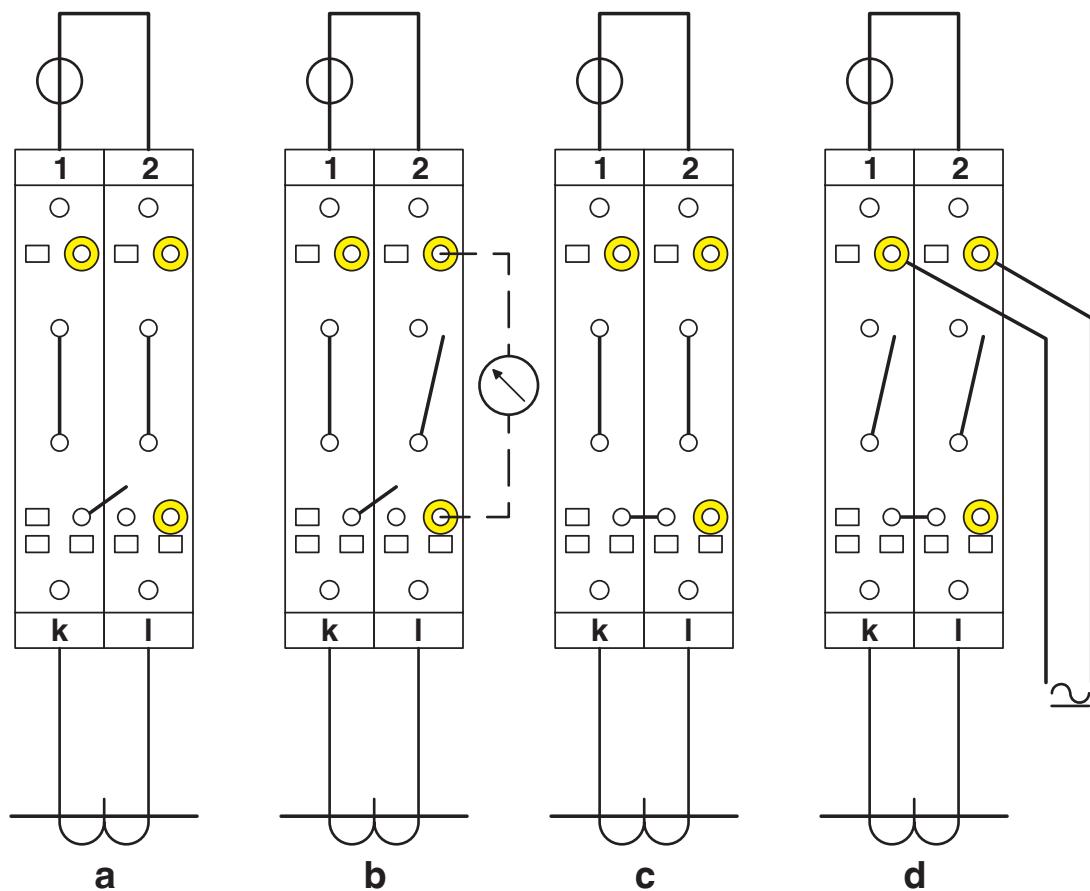

Simple current transformer test circuit

- a = normal operation
- b = measured value testing
- c = transformer testing
- d = relay testing


RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

Connection diagram

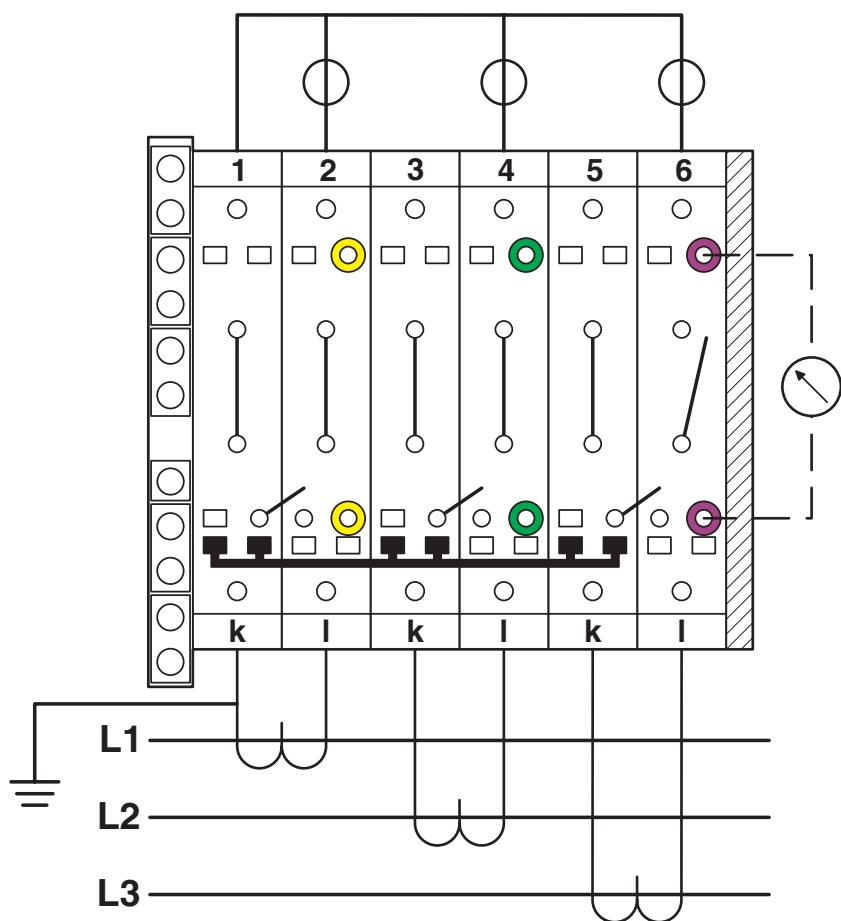

Three-phase transducer test set


RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



Circuit diagram

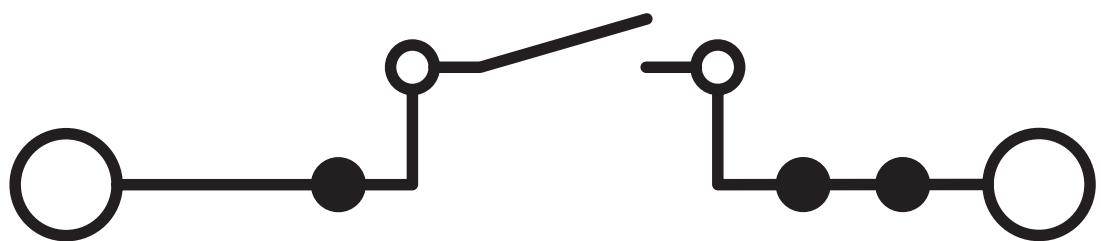


RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

Connection diagram

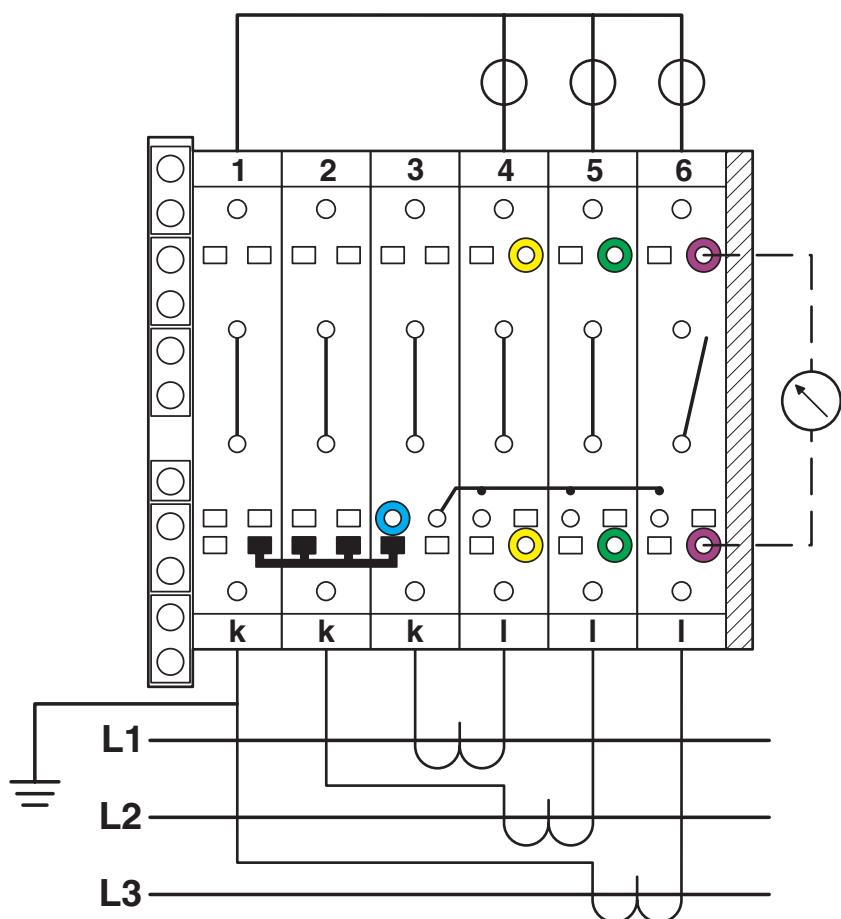

Three-phase linked transducer test set

RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3049039>



EAC

Approval ID: RU C-DE.A*30.B.01742



EAC

Approval ID: RU C-DE.BL08.B.00540



cULus Recognized

Approval ID: E60425

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	600 V	30 A	-	-
Use group C	600 V	30 A	-	-

RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



Classifications

ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000902
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

Accessories

 Note: Applying some accessories below might limit this product.

FBS 2-8 - Plug-in bridge

3030284

<https://www.phoenixcontact.com/us/products/3030284>

Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red



 Max. current carrying capacity: 41 A

FBS 3-8 - Plug-in bridge

3030297

<https://www.phoenixcontact.com/us/products/3030297>

Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red



 Max. current carrying capacity: 41 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBS 4-8 - Plug-in bridge

3030307

<https://www.phoenixcontact.com/us/products/3030307>

Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red



Max. current carrying capacity: 41 A

FBS 5-8 - Plug-in bridge

3030310

<https://www.phoenixcontact.com/us/products/3030310>

Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red



Max. current carrying capacity: 41 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBS 10-8 - Plug-in bridge

3030323

<https://www.phoenixcontact.com/us/products/3030323>

Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red



Max. current carrying capacity: 41 A

FBSR 2-8 - Plug-in bridge

3033808

<https://www.phoenixcontact.com/us/products/3033808>

Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red



Max. current carrying capacity: 32 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBSR 3-8 - Plug-in bridge

3001597

<https://www.phoenixcontact.com/us/products/3001597>

Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red



Max. current carrying capacity: 32 A

FBSR 4-8 - Plug-in bridge

3000585

<https://www.phoenixcontact.com/us/products/3000585>

Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red



Max. current carrying capacity: 32 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBSR 5-8 - Plug-in bridge

3033809

<https://www.phoenixcontact.com/us/products/3033809>

Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red



Max. current carrying capacity: 32 A

FBSR 10-8 - Plug-in bridge

3001599

<https://www.phoenixcontact.com/us/products/3001599>

Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red



Max. current carrying capacity: 32 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBSRH 2-8 - Short-circuit connector

3033802

<https://www.phoenixcontact.com/us/products/3033802>

Short-circuit connector, pitch: 8.2 mm, number of positions: 2, color: red



Max. current carrying capacity: 32 A

FBSRH 3-8 - Short-circuit connector

3033803

<https://www.phoenixcontact.com/us/products/3033803>

Short-circuit connector, pitch: 8.2 mm, number of positions: 3, color: red



Max. current carrying capacity: 32 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBSRH 4-8 - Short-circuit connector

3033804

<https://www.phoenixcontact.com/us/products/3033804>

Short-circuit connector, pitch: 8.2 mm, number of positions: 4, color: red



Max. current carrying capacity: 32 A

FBS 2-8 CT - Plug-in bridge

3033830

<https://www.phoenixcontact.com/us/products/3033830>

Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: orange



Max. current carrying capacity: 41 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBS 3-8 CT - Plug-in bridge

3033831

<https://www.phoenixcontact.com/us/products/3033831>

Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: orange



Max. current carrying capacity: 41 A

FBS 4-8 CT - Plug-in bridge

3033832

<https://www.phoenixcontact.com/us/products/3033832>

Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: orange



Max. current carrying capacity: 41 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBS 10-8 CT - Plug-in bridge

3033833

<https://www.phoenixcontact.com/us/products/3033833>

Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: orange



Max. current carrying capacity: 41 A

FBS 2-8 BU - Plug-in bridge

3032567

<https://www.phoenixcontact.com/us/products/3032567>

Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue



Max. current carrying capacity: 41 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBS 3-8 BU - Plug-in bridge

3032570

<https://www.phoenixcontact.com/us/products/3032570>

Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: blue



Max. current carrying capacity: 41 A

FBS 4-8 BU - Plug-in bridge

3032583

<https://www.phoenixcontact.com/us/products/3032583>

Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: blue



Max. current carrying capacity: 41 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBS 5-8 BU - Plug-in bridge

3032596

<https://www.phoenixcontact.com/us/products/3032596>

Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: blue



Max. current carrying capacity: 41 A

FBS 6-8 BU - Plug-in bridge

3032677

<https://www.phoenixcontact.com/us/products/3032677>

Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: blue



Max. current carrying capacity: 41 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

FBS 10-8 BU - Plug-in bridge

3032606

<https://www.phoenixcontact.com/us/products/3032606>

Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: blue



Max. current carrying capacity: 41 A

SB-MER 2-8 - Switching jumper

3000587

<https://www.phoenixcontact.com/us/products/3000587>

Switching jumper, pitch: 8.2 mm, number of positions: 2, length: 25 mm, color: gray/orange



Max. current carrying capacity: 25 A

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

RB UT 6-ST(2,5/4) - Reducing bridge

3047264

<https://www.phoenixcontact.com/us/products/3047264>

Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 33 mm, color: red



Max. current carrying capacity: 35 A

RB UT 6-(2,5/4) - Reducing bridge

3047251

<https://www.phoenixcontact.com/us/products/3047251>

Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red



Max. current carrying capacity: 40 A

RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



D-RT 5-T - End cover

3049291

<https://www.phoenixcontact.com/us/products/3049291>

End cover, depth: 42.2 mm, width: 2.2 mm, height: 90.4 mm, color: gray



TPNS-UK - Partition plate

0706647

<https://www.phoenixcontact.com/us/products/0706647>

Partition plate, depth: 70 mm, width: 2 mm, height: 80 mm, color: gray



RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



BE-RT 3/5 - Path extension

3049819

<https://www.phoenixcontact.com/us/products/3049819>

Path extension, color: gray



S-RT 5-T - Switching lock

3049330

<https://www.phoenixcontact.com/us/products/3049330>

Switching lock, depth: 26.5 mm, width: 8.3 mm, height: 15.65 mm, color: white



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

LPS-8/E - Service connector

3270560

<https://www.phoenixcontact.com/us/products/3270560>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

LPS-8 - Service connector

3270561

<https://www.phoenixcontact.com/us/products/3270561>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

LPO 6/E - Pick-off plug

3270525

<https://www.phoenixcontact.com/us/products/3270525>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

LPO 6 - Pick-off plug

3270526

<https://www.phoenixcontact.com/us/products/3270526>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>

DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZB 12:UNPRINTED - Zack marker strip

0812120

<https://www.phoenixcontact.com/us/products/0812120>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 12 x 10.5 mm, Number of individual labels: 5

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

ZB 12 CUS - Zack marker strip

0824942

<https://www.phoenixcontact.com/us/products/0824942>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

ZB 12,LGS:L1-N,PE - Zack marker strip

0812146

<https://www.phoenixcontact.com/us/products/0812146>



Zack marker strip, Strip, white, labeled, printed horizontally: L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

UC-TM 12 - Marker for terminal blocks

0819194

<https://www.phoenixcontact.com/us/products/0819194>

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40



UC-TM 12 CUS - Marker for terminal blocks

0824613

<https://www.phoenixcontact.com/us/products/0824613>

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

UCT-TM 12 - Marker for terminal blocks

0829144

<https://www.phoenixcontact.com/us/products/0829144>

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30



UCT-TM 12 CUS - Marker for terminal blocks

0829630

<https://www.phoenixcontact.com/us/products/0829630>

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

ZB 16,3:UNPRINTED - Zack marker strip

0820222

<https://www.phoenixcontact.com/us/products/0820222>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 16.3 mm, lettering field size: 10.5 x 16.25 mm, Number of individual labels: 5

ZB 16,3 CUS - Zack marker strip

0824946

<https://www.phoenixcontact.com/us/products/0824946>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 16.3 mm, lettering field size: 10.5 x 16.25 mm, Number of individual labels: 5

RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>

Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray



MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/us/products/3032871>

4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch



PS-8 - Test plug

3031005

<https://www.phoenixcontact.com/us/products/3031005>

Test plug, Modular test plug, number of positions: 1, color: red



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

DP PS-8 - Spacer plate

3036741

<https://www.phoenixcontact.com/us/products/3036741>



Spacer plate, depth: 29 mm, width: 8.2 mm, height: 22.4 mm, number of positions: 1, color: red

PS-8/2,3MM RD - Test plug

3048564

<https://www.phoenixcontact.com/us/products/3048564>

Test plug, number of positions: 1, color: red



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray



RT 5-T - Test disconnect terminal block



3049039


<https://www.phoenixcontact.com/us/products/3049039>

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



RT 5-T - Test disconnect terminal block



3049039

<https://www.phoenixcontact.com/us/products/3049039>

E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

SZS 1,0X6,5 VDE - Screwdriver

1205079

<https://www.phoenixcontact.com/us/products/1205079>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 6.5 x 150 mm, 2-component grip, with non-slip grip

RT 5-T - Test disconnect terminal block

3049039

<https://www.phoenixcontact.com/us/products/3049039>



SF-SL 1,2X6,5-150 - Screwdriver

1212553

<https://www.phoenixcontact.com/us/products/1212553>

Screwdriver, bladed (lasered), size: 1.2 x 6.5 x 150 mm, 2-component grip, with non-slip grip



TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/us/products/3072821>

Separating plate, depth: 67.5 mm, width: 1 mm, height: 105.2 mm, color: gray



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com