



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through & Ground**
Modular Terminal Block Product Type: **PI-Spring Terminal Block**
Primary Product Color: **Gray**
Product Spacing: **5.2 mm [.205 in]**
Number of Positions: **4**

Features

Product Type Features

Modular Terminal Block Product Type	PI-Spring Terminal Block
-------------------------------------	--------------------------

Configuration Features

Gauge Type	A2 / 2.3 mm Dia.
Number of Levels	2
Number of Circuits	2
Block Function	Feed-Through & Ground
Number of Positions	4

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Power Loss	.8 W
Short-Time Withstanding Current Rating @ 1s	300 A
Voltage Rating (IEC)	800 V
Current Rating (UL)	20 A
Current Rating (IEC)	24 A

Body Features

--	--



Product Weight	15.7 g[.618 oz]
----------------	-----------------

Primary Product Color	Gray
-----------------------	------

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
------------------------	-------------------

Connector Mounting Type	DIN Rail
-------------------------	----------

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.2 - 4 mm ²
---	------------------------

Main Circuit Capacity - Twin Ferrule per Spring Clamp	.22 - .5 mm ²
---	--------------------------

Wire Stripping Length	11 mm[.433 in]
-----------------------	----------------

Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.22 - 2.5 mm ²
--	---------------------------

Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 - 14 AWG
--	-------------

Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 - 2.5 mm ²
---	---------------------------

Tool Size	3.5 mm[.138 in]
-----------	-----------------

Product Depth	60.3 mm
---------------	---------

Product Length	60.3 mm
----------------	---------

Product Height	84.6 mm
----------------	---------

Product Spacing	5.2 mm[.205 in]
-----------------	-----------------

Usage Conditions

Installation Temperature Range	-5 - 40 °C[23 - 104 °F]
--------------------------------	-------------------------

Operating Temperature Range	-55 - 110 °C[-67 - 230 °F]
-----------------------------	----------------------------

Industry Standards

IP Rating	IP20
-----------	------

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	
--	--



Current ECHA Candidate List: JAN 2024
(240)
Candidate List Declared Against: JAN 2024
(240)
Does not contain REACH SVHC

Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1SNK140000R0000
MC512

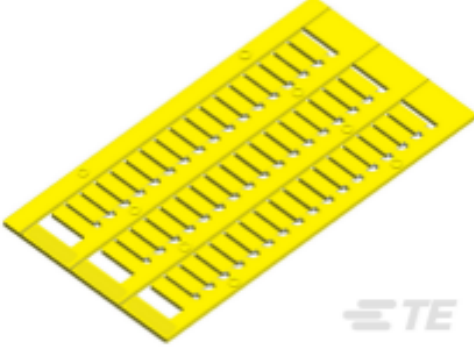

TE Part # 1SNK140004R0000
MC512-YL



TE Part # 1SNK705960R0000
EK2.5-D2



TE Part # 1SNK900200R0000
TC5



TE Part # 1SNK900205R0000
TP4



TE Part # 1SNK900602R0000
SHB




TE Part # 1SNK900606R0000
LH-J




TE Part # 1SNK905302R0000
JB5-2




TE Part # 1SNK905303R0000
JB5-3

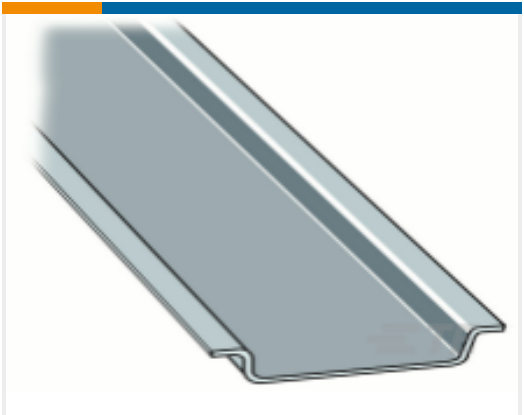

TE Part # 1SNA164800R0300
PR3.G2

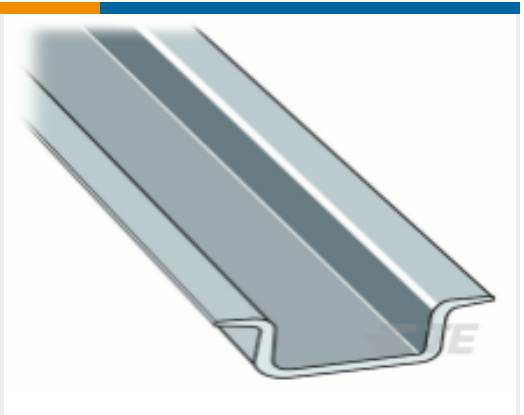


TE Part # 1SNA168500R1200
PR4

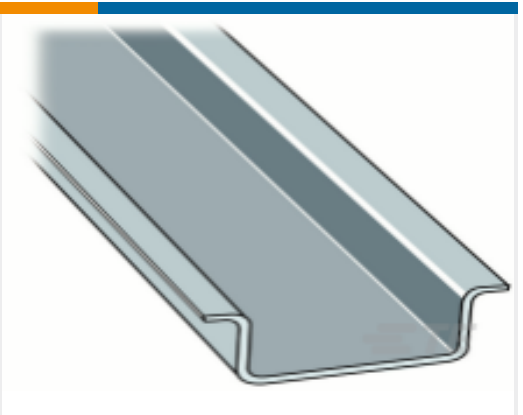

TE Part # 1SNA168700R2200
PR5



TE Part # 1SNA173220R0500
PR30

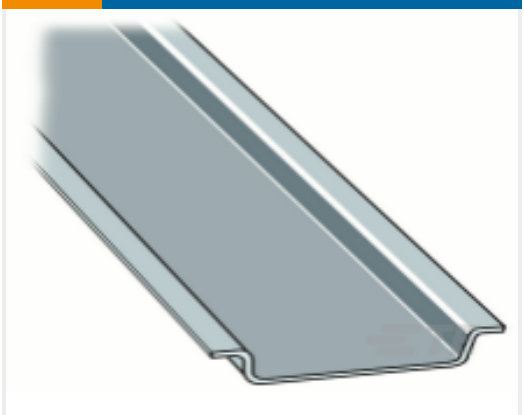

TE Part # 1SNA174300R1700
PR3.Z2



TE Part # 1SNA178529R0400
PR50



TE Part # 1SNK149999R0000
MC512PA



TE Part # 1SNK900102R0000
BAZH1



TE Part # 1SNK900201R0000
TC5-R1



TE Part # 1SNK900203R0000
TP2



TE Part # 1SNK900609R0000
PROCAP5

Also in the Series | ENTRELEC SNK



Modular Terminal Blocks(320)



Terminal Block & Strip Conducting
Accessories(67)



Terminal Block & Strip Insulating
Accessories(31)

Customers Also Bought



TE Part # 1SNK705150R0000
ZK2.5-PE



TE Part # 1SNK705210R0000
ZK2.5-D2



TE Part # 1SNK706010R0000
ZK4



TE Part # 1SNK710150R0000
ZK10-PE





TE Part # 1SNK712010R0000
ZK16



TE Part # 1SNK905303R0000
JB5-3



TE Part # 1SNK908302R0000
JB8-2



TE Part # 1SNK705250R0000
ZK2.5-D1-PE



TE Part # 1SNK905304R0000
JB5-4



TE Part # 1SNA290281R0100
FEDB.L

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK705212R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705212R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705212R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

ZK2.5-D2-PE

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Agency Approvals

CB-IEC-ZK--Dx-PE-FR_715662_M1

1SNK705212R0000

Modular Terminal Blocks, Feed-Through & Ground, PI-Spring Terminal Block, Gray,
Product Spacing .205 in [5.2 mm], 4 Position, DIN Rail, ENTRELEC SNK



English