

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse terminal block for cartridge fuse insert, cross section: 0.5-10 mm², AWG: 20-8, width: 12.2 mm, color: Black

Commercial data

| | |
|--------------------------------------|--------------------|
| Item number | 3034251 |
| Packing unit | 25 pc |
| Minimum order quantity | 25 pc |
| Sales key | BE22 |
| Product key | BE2235 |
| Catalog page | Page 213 (CL-2009) |
| GTIN | 4046356052801 |
| Weight per piece (including packing) | 26.311 g |
| Weight per piece (excluding packing) | 24.733 g |
| Customs tariff number | 85369095 |
| Country of origin | PL |

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

Technical data

Product properties

| | |
|-----------------------|---------------------|
| Product type | Fuse terminal block |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Data management status

| | |
|------------------|----|
| Article revision | 08 |
|------------------|----|

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|---------------------------|
| Fuse type | Glass / ceramics / ... |
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 0.77 W |
| Fuse | G / 5 x 20 |
| LED voltage range | 12 V AC/DC ... 30 V AC/DC |
| LED current range | 1 mA ... 2.5 mA |

Input data

| | |
|-------------------|---------------------------|
| LED voltage range | 12 V AC/DC ... 30 V AC/DC |
|-------------------|---------------------------|

Connection data

| | |
|---------------------------------|---------------------|
| Number of connections per level | 2 |
| Nominal cross section | 2.5 mm ² |

Level 1 above 1

| | |
|---|---|
| Stripping length | 12 mm |
| Internal cylindrical gage | A5 |
| Connection in acc. with standard | IEC 60947-7-3 |
| Conductor cross section rigid | 0.5 mm ² ... 10 mm ² |
| Cross section AWG | 20 ... 8 (converted acc. to IEC) |
| Conductor cross section flexible | 0.5 mm ² ... 6 mm ² |
| Conductor cross section, flexible [AWG] | 20 ... 10 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1.5 mm ² |
| Nominal current | 10 A |
| Maximum load current | 10 A (with 4 mm ² conductor cross section) |

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

| | |
|-----------------------|---------------------|
| Nominal voltage | 500 V |
| Nominal cross section | 1.5 mm ² |

Level 1 below 1

| | |
|---|--|
| Stripping length | 10 mm |
| Internal cylindrical gage | A3 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 0.2 mm ² ... 4 mm ² |
| Cross section AWG | 24 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.25 mm ² ... 2.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.25 mm ² ... 2.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² |
| Nominal cross section | 1.5 mm ² |

Dimensions

| | |
|--------------------|---------|
| Width | 12.2 mm |
| Height | 71.5 mm |
| Depth on NS 35/7,5 | 51.3 mm |
| Depth on NS 35/15 | 58.8 mm |

Material specifications

| | |
|---|-------------|
| Color | black |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
| | IEC 60947-7-1 |

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/7,5 |


DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

Drawings

Application drawing

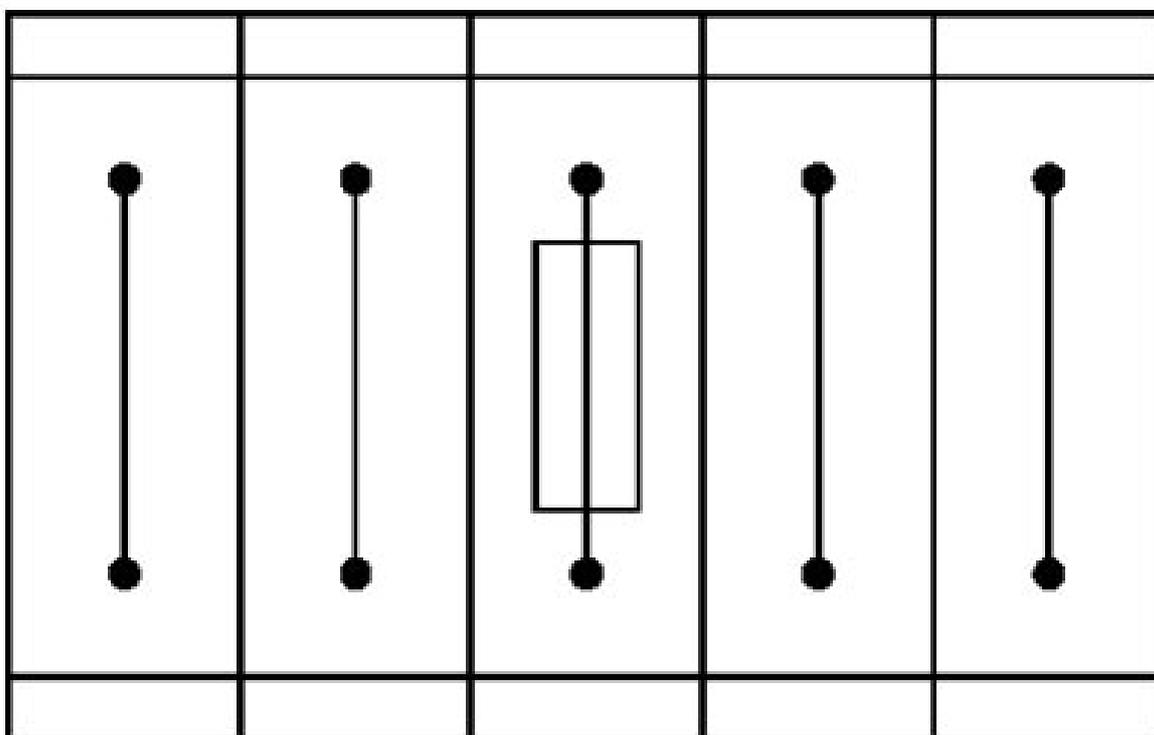


Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

Circuit diagram

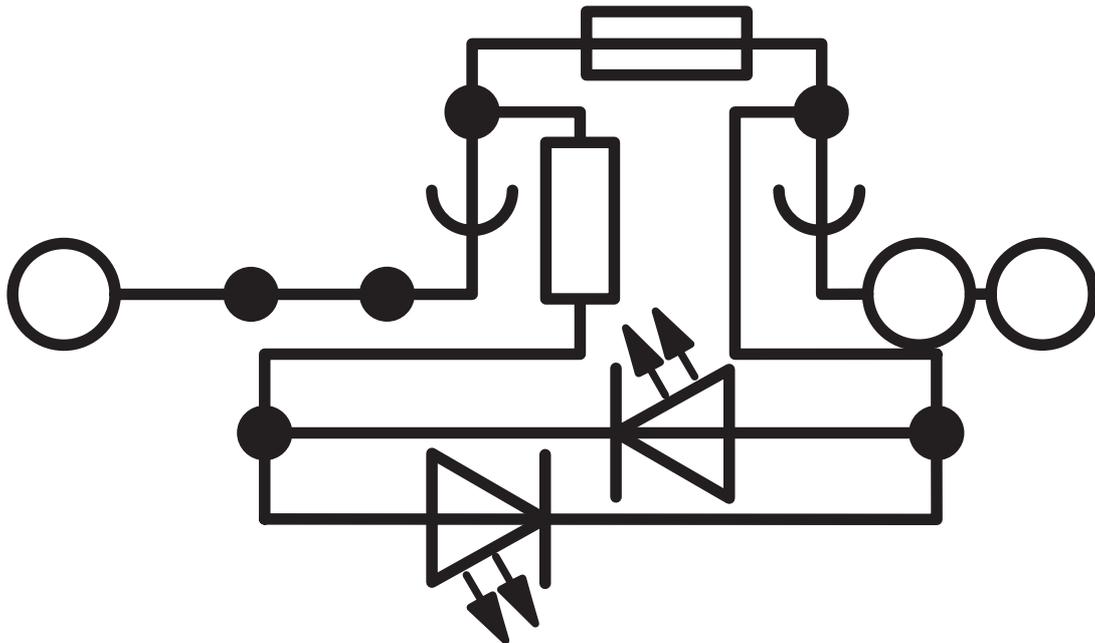


DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

Application drawing

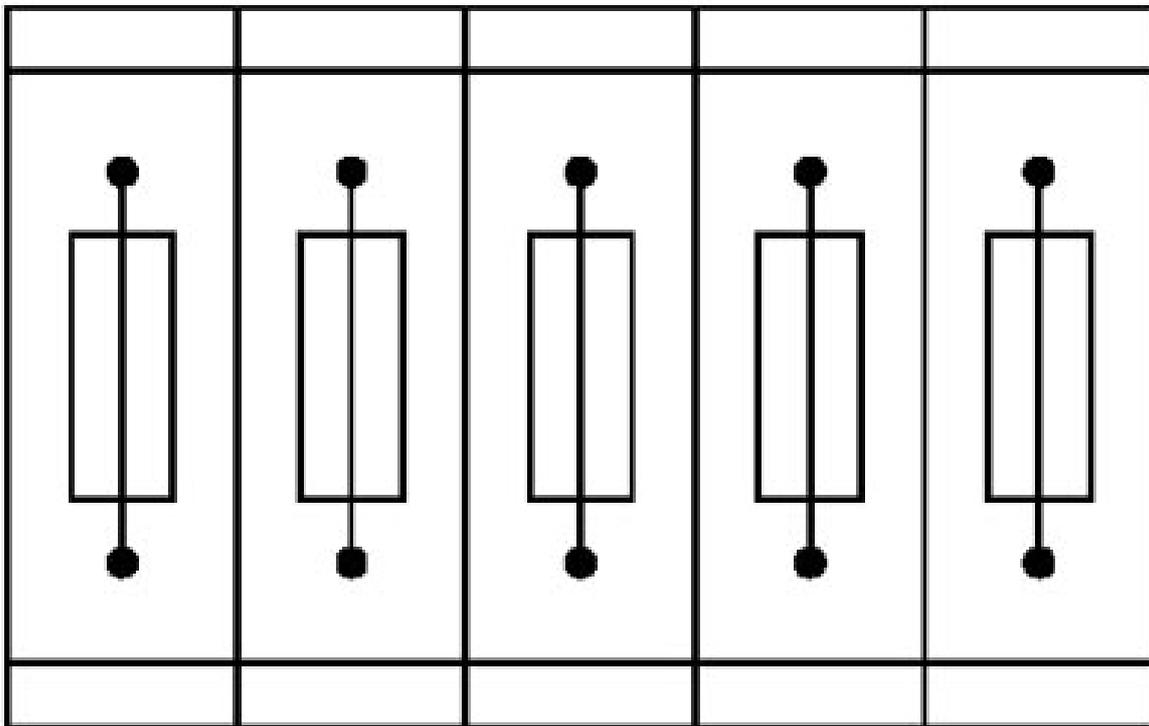

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3034251>



IECEE CB Scheme
Approval ID: NL-23160



EAC
Approval ID: RU C-DE.BL08.B.00644



KEMA-KEUR
Approval ID: 71-104946



cULus Recognized
Approval ID: E60425

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-------------|-----------------------|-----------------------|-------------------|-----------------------------|
| Use group B | | | | |
| Output | 600 V | 10 A | 24 - 12 | - |
| Input | 600 V | 10 A | 20 - 8 | - |
| Use group C | | | | |
| Output | 600 V | 10 A | 24 - 12 | - |
| Input | 600 V | 10 A | 20 - 8 | - |

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141116 |
| ECLASS-12.0 | 27141116 |
| ECLASS-13.0 | 27250113 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000899 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | fc94cde2-5040-43b8-a687-079d3c25dd73 |

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

Accessories

 Note: Applying some accessories below might limit this product.

FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/us/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/us/products/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 24 A

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/us/products/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 24 A

FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/us/products/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 24 A

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/us/products/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 24 A

FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/us/products/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 24 A

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/us/products/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 24 A

FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/us/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 24 A

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/us/products/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 24 A

FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/us/products/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 24 A

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/us/products/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 24 A

FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/us/products/3032198>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 24 A

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/us/products/3032208>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 24 A

FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/us/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 24 A

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

PS-6 - Test plug

3030996

<https://www.phoenixcontact.com/us/products/3030996>



Test plug, Modular test plug, number of positions: 1, color: red

DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

PS-6/2,3MM RD - Test plug

3038736

<https://www.phoenixcontact.com/us/products/3038736>

Test plug, number of positions: 1, color: red



CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



DT 6/2,5-DREHSEILED 24 (5X20) - Fuse modular terminal block

3034251

<https://www.phoenixcontact.com/us/products/3034251>

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/us/products/3035975>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/us/products/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/us/products/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/us/products/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/us/products/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/us/products/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/us/products/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/us/products/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/us/products/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/us/products/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

DT 6/2,5-DREHSILED 24 (5X20) - Fuse modular terminal block



3034251

<https://www.phoenixcontact.com/us/products/3034251>

SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/us/products/1207608>



Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com