



Connectors > RF Connectors > Coax Connectors



RF Interface: **SMA**

RF Connector Style: **Plug**

RF Connector Mated Outer Diameter (Approximate): **8.99 mm [.354 in]**

Impedance: **50 Ω**

Compatible With RF Cable Type: **RG 402 Semi-Rigid**

Features

Product Type Features

Connector Product Type	Connector Assembly
Connector Seal & Plug Type	Interfacial Seal
RF Interface	SMA
RF Connector Style	Plug
Compatible With RF Cable Type	RG 402 Semi-Rigid
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Cable Connector Orientation	Straight
Body Material	Stainless Steel
Body Material Finish	Passivated

Contact Features

RF Connector Center Contact Underplating Material	Nickel
RF Connector Contact Configuration	Not Captivated



Ferrule Plating Material	Nickel
Crimp Type	Hex
Ferrule Material	Brass
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	Mechanical

Dimensions

Product Length	16 mm[.63 in]
RF Connector Mated Outer Diameter (Approximate)	8.99 mm[.354 in]

Usage Conditions

Operating Temperature Range	-65 - 165 °C[-85 - 329 °F]
-----------------------------	----------------------------

Operation/Application

Operating Frequency	18 GHz
---------------------	--------

Packaging Features

Packaging Method	Package
------------------	---------

Other

Coupling Nut Plating Finish	Passivated
Coupling Nut Base Material	Stainless Steel
Military Category	F
Grade	Military
Dielectric Material	PTFE

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024 (240)
Candidate List Declared Against: JAN 2024 (240)
SVHC > Threshold:
Pb (3.7% in base metal alloy)
Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | AMP SMA

Battery Holders(1)

Coax Connectors(207)

Connector Adapters & Connector Savers(10)

Connector Caps & Covers(3)

Connector Hardware(2)


Connector Strain Relief(1)

RF Cable Assemblies(2)

RF Connector Launchers(6)

Customers Also Bought

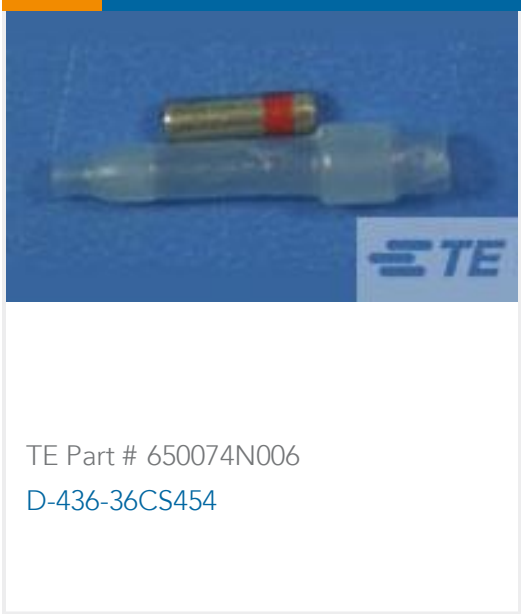

 TE Part # 205203-3 CRIMP SNAP RCPT ASSY,SIZE 1	 TE Part # DT06-3S-P006 PLG, 3P, GRY, 120 OHM RESISTOR	 TE Part # 2562-201-2031L CONT SOC ASSY	 TE Part # 204351-1 SZ 22 SOCKET CONTACT
 TE Part # 34158 TERMINAL,PG R 16-14 6	 TE Part # DT04-3P-P007 REC, 3P, GRY, Y-SPLITTER	 TE Part # 1-321898-0 DG 22-16 HT ALUMEL R 10	 TE Part # 34119 TERMINAL,SOLIS R 16-14 4
 TE Part # 8-32960-1 TERMINAL,PG R 16-14 10	 TE Part # 650074N006 D-436-36CS454		

Documents

Product Drawings
PLUG,SMA,W/O HOLES,W/CTR CONT
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_228634-1_AD.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_228634-1_AD.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_228634-1_AD.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Product Specification

English

Contact, COAXICON, Modified Size 1 For ARINC 600 Series TCAS Connector

English

Contact, COAXICON, Modified Size 1 For ARINC 600 Series TCAS Connector

Japanese

Product Specification

Japanese

Product Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English