



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: **Housing**
Connector & Housing Type: **Receptacle**
Connector System: **Wire-to-Board**
Number of Positions: **3**
Centerline (Pitch): **2.5 mm [.098 in]**

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

--	--



Contact Type	Socket
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	4.5 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Entry Configuration	Both Ends Closed
Housing Material	Nylon - GF
Centerline (Pitch)	2.5 mm[.098 in]

Dimensions

Connector Length	9.8 mm[.386 in]
Connector Height	8 mm[.315 in]
Connector Width	9.58 mm[.377 in]
Wire Size	.13 - .33 mm²

Usage Conditions

Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	600
Packaging Method	Bag



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2132415-3
EP2.5 Shrouded HDR ASSY 3P VERT w /o boss



TE Part # 1969443-3
EP 2.5 TPA Retainer, 3 Pos



TE Part # 1744423-1
EP 2.5 RCPT CONTACT, 24-20 AWG





TE Part # 2110989-1
EP 2.5 RCPT CONTACT, 26-22 AWG



 TE Part # 1744426-3 Header Housing Assy, EP 2.5 RA, 3 Pos.	 TE Part # 1744439-3 EP2.5 Shrd HDR ASSY 3P VERT, GW	 TE Part # 2299683-3 EP2.5 HDR 3P VERT W/O BOSS, TAPING	 TE Part # 2304185-3 EP2.5 SHROUDED HDR ASSY 3P VERT W/O BOSS
 TE Part # 2132230-3 EP2.5 Shrouded HDR ASSY 3P VER	 TE Part # 1744418-3 3 POS EP 2.5 HDR, GLOW WIRE	 TE Part # 1744446-3 Hdr Assy, EP 2.5 RA, 3 Pos., GW	 TE Part # 1-2299683-3 EP2.5 HDR 3P VERT W/O BOSS, TAPING,RED
 TE Part # 2-2299683-3 EP2.5 HDR 3P VERT W/O BOSS, TAPING,BLUE	 TE Part # 3-1744426-3 HEADER, EP 2.5 RA, 3 POS.OMIT 2 PIN	 TE Part # 3-2299683-3 EP2.5 HDR 3P VERT W/O BOSS, TAPING,BLACK	 TE Part # 4-2299683-3 EP2.5 HDR 3P VERT W/O BOSS, TAPING,YELLOW
 TE Part # 5-2299683-3 EP2.5 HDR 3P VERT W/O BOSS, TAPING,GREEN			

Also in the Series | Economy Power 2.5

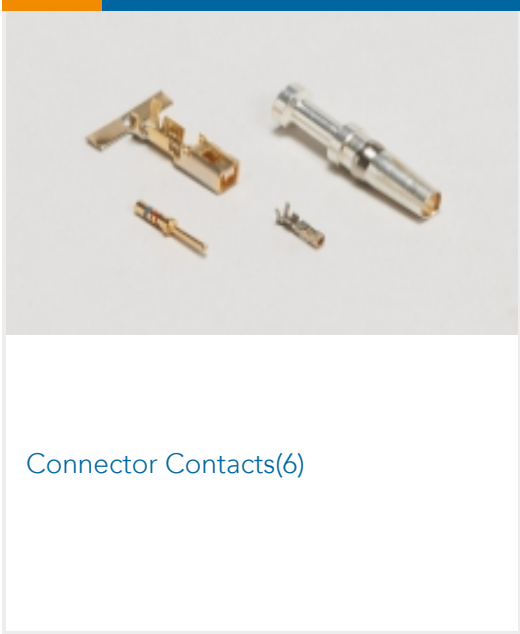 Connector Contacts(6)	 Connector Hardware(49)	 PCB Headers & Receptacles(494)	 Rectangular Power Connectors(43)
--	--	---	---

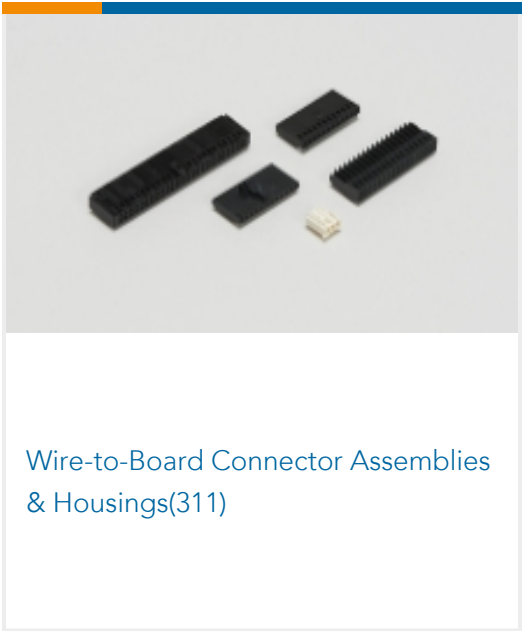

Customers Also Bought



TE Part # 1747995-2
GHC EYELET 6.2 3POS PLUG
HOUSING RED



TE Part # 1969442-4
EP 2.5 TPA Housing, 4 Pos



TE Part # 1969442-5
EP 2.5 TPA Housing, 5 Pos



TE Part # 1744423-1
EP 2.5 RCPT CONTACT, 24-20 AWG



TE Part # 8-2338183-4
EP 2.5 HOUSING 4P, GREEN, UL
version



TE Part # 1969442-6
EP 2.5 TPA Housing, 6 Pos



TE Part # 2324201-8
HSG,REC,FREE HANGING,GWT,
DUALROW,EP2.5

Documents

Product Drawings

EP 2.5 TPA Housing, 3 Pos

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1969442-3_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1969442-3_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1969442-3_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages
[7-1773461-6_EP2.5_Connector_Series](#)

English

Product Specifications
[Application Specification](#)

English

Instruction Sheets
[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals
[UL Report](#)

English