




AMP CT

TE Internal #: 179228-5
Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 5 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >
AMP COMMON TERMINATION HOUSINGS

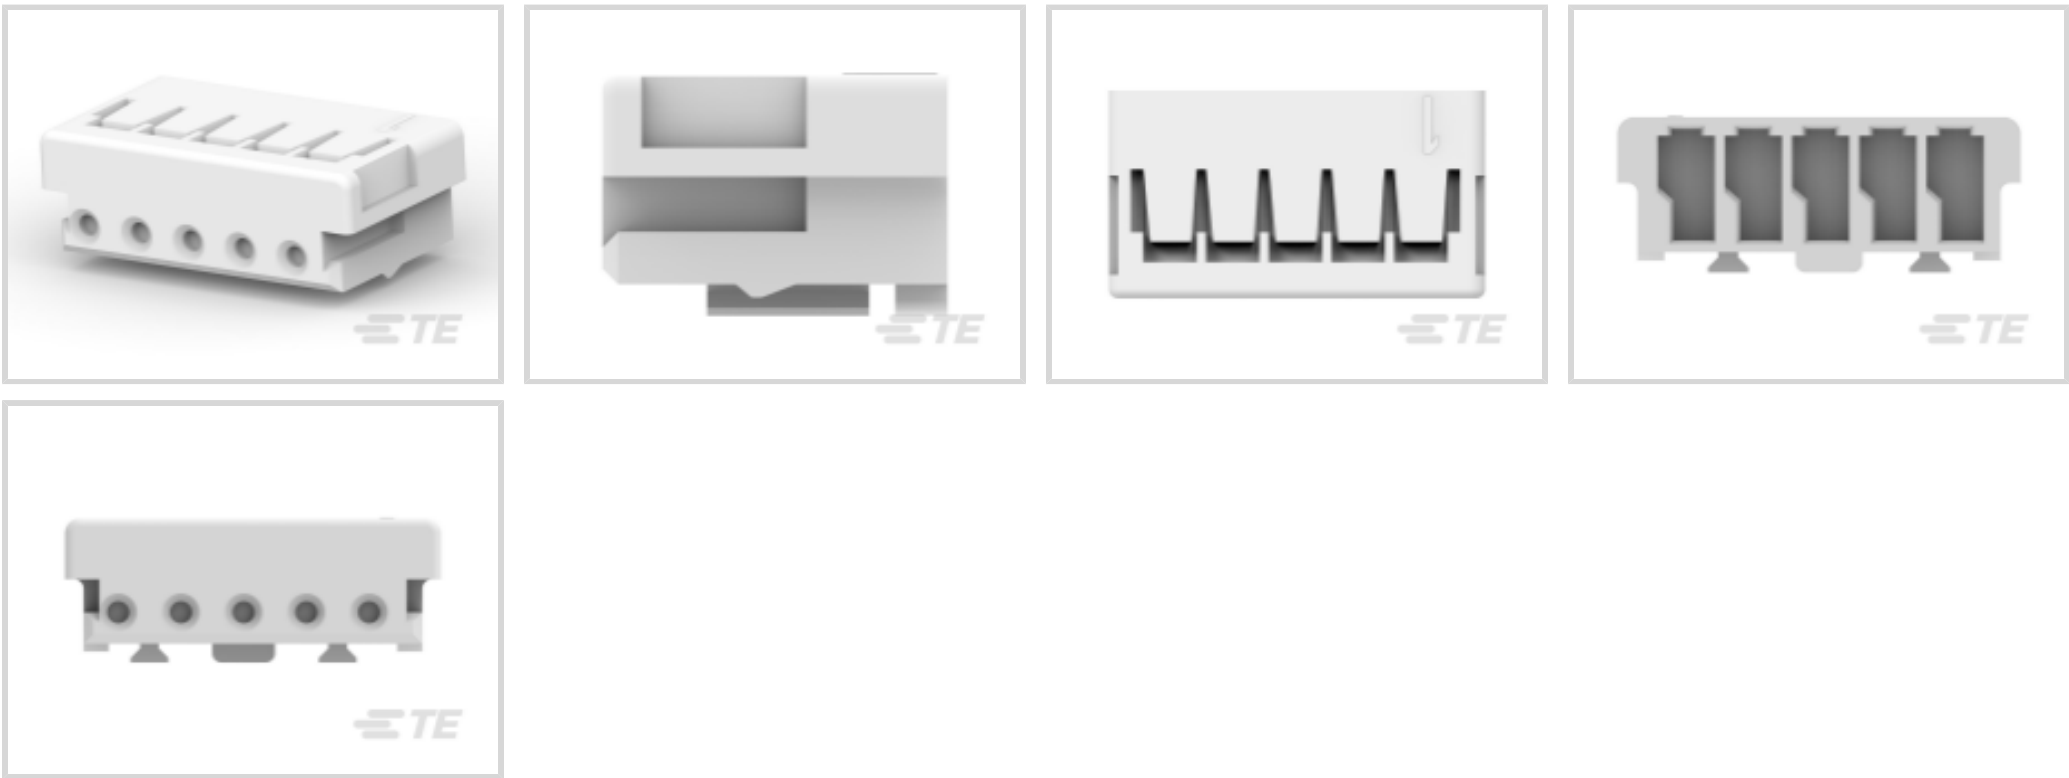

Connector Product Type: **Housing**
Connector & Housing Type: **Receptacle**
Connector System: **Wire-to-Board, Wire-to-Wire**
Number of Positions: **5**
Centerline (Pitch): **2 mm [.079 in]**

[All AMP COMMON TERMINATION HOUSINGS \(176\)](#)

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	5
Number of Rows	1

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	2000 VAC
Insulation Resistance	1000 MΩ
Operating Voltage	125 VAC



Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Layout	Inline
Contact Type	Socket
Contact Current Rating (Max)	4 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	2 mm[.079 in]

Dimensions

Connector Length	12 mm[.472 in]
Connector Height	6.6 mm[.26 in]
Connector Width	4.6 mm[.181 in]
Wire Size	30 - 22 AWG

Usage Conditions

Operating Temperature Range	-30 - 105 °C[-22 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-0

Packaging Features



Packaging Quantity	3000
Packaging Method	Bag & Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-AM7017-C7671
Common Termination Contacts -
POWER TRIPLE LOCK



TE Part # CAT-AM7017-H342
AMP COMMON TERMINATION
HEADERS








TE Part # CAT-3984552-BHTHVS
CT Box Header SMT: Vert, Shrouded




TE Part # CAT-3983178-PHBXVD
CT 2mm Post Header Asmbly: Box V
DIP

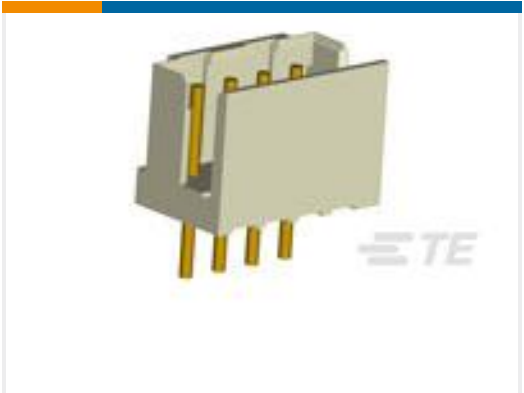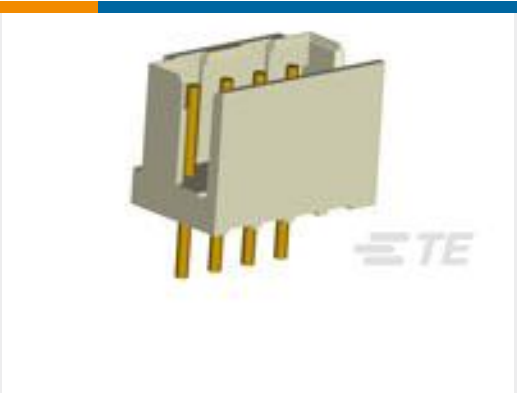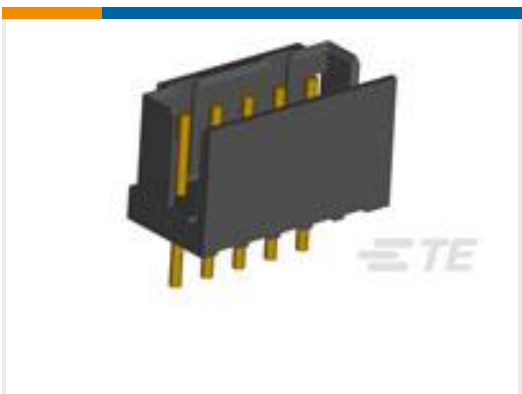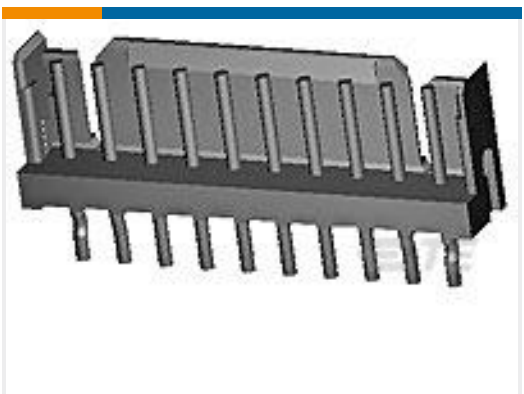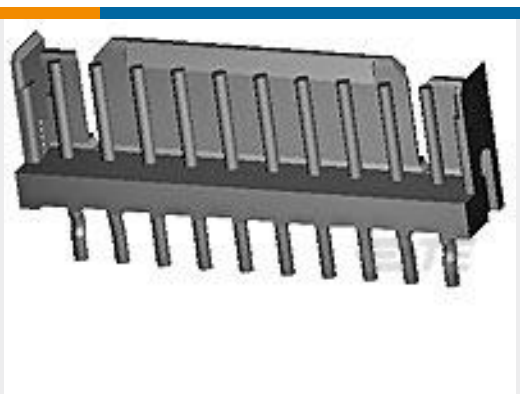

 TE Part # CAT-3984552-PHITPS CT Post Header Assembly: Part. Shrouded	 TE Part # CAT-3980407-RHDRRA CT 2mm Header Assembly: Right Angle	 TE Part # 292156-5 CT RELAY HDR ASSY FREE HANGING	 TE Part # 292254-5 CT RELAY HDR ASSY 5P NAT
 TE Part # 292133-5 CT P/HDR ASSY BOX V 5P W/O KIN	 TE Part # 292134-5 CT BOX HDR ASSY V 5P AU W/KINK	 TE Part # 292164-5 CT P/HDR BOX H ASSY 5P T/P NAT	 TE Part # 292165-5 CT P/HDR BOX V 5P T/P NAT
 TE Part # 292166-5 CT P/HDR BOX V 5P T/P NAT W/O	 TE Part # 292169-5 CT P/HDR V 5P T/P NAT	 TE Part # 292170-5 CT P/HDR ASSY 5P V W/O KINK T	 TE Part # 292271-5 MT REC ASSY AU-PL. 5P GRAY

Also in the Series | AMP CT

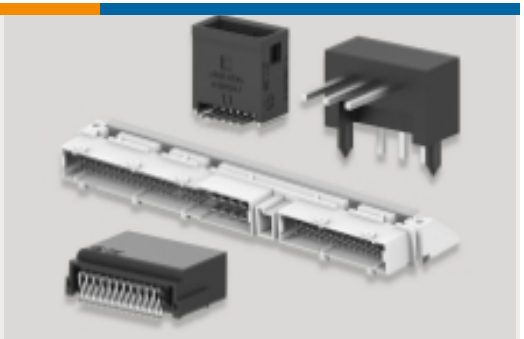 Connector Contacts(8)	 Connector Hardware(46)	 PCB Headers & Receptacles(756)	 Wire-to-Board Connector Assemblies & Housings(255)
--	--	---	---

Customers Also Bought

 TE Part # 179228-7 CT CRIMP-2 REC HSG 7P NATURAL	 TE Part # 292254-6 CT RELAY HDR ASSY 6P NAT	 TE Part # 1-1623708-2 RGP0207CH 10% 1G0	 TE Part # 2-292254-2 CT RELAY HDR ASSY 2P BLUE
---	---	--	---



TE Part # 284865-4
Direct mount card edge conn.,

TE Part # 964768-3
STD-TIM HSG SPECIAL 2P (NATURE)

TE Part # 1-282044-1
AMP MONO-SHAPE P.C.B.CONN4P.
G

TE Part # 8-292112-2
MT REC ASSY (#26,28)

TE Part # 8-292155-5
SGL HDR PANEL MOUNT ASSY

Documents

Product Drawings

CT CRIMP TYPE REC HSG

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_179228-5_N1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_179228-5_N1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_179228-5_N1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English

Product Specifications

Crimping of AMP 2.0mm Pitch, CT Crimp Typell Rec Contact

English

Application Specification

English

179228-5

Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 5 Position, .079 in [2 mm]
Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT



[Agency Approvals](#)
[Agency Approval Document](#)
English