



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**
Connector & Housing Type: **Plug**
Connector System: **Wire-to-Wire**
Number of Positions: **3**
Centerline (Pitch): **4.2 mm [.165 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Insertion Force	15 Newton
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Contact Layout	Inline
----------------	--------



Contact Retention Within Housing	Without
Contact Type	Pin

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	4.2 mm[.165 in]
Housing Color	Natural
Housing Material	Nylon 66

Dimensions

Connector Height	7.4 mm[.291 in]
Product Width	23.9 mm[.94 in]
Product Length	13.8 mm[.543 in]
Compatible Insulation Diameter Range	1.2 - 3.1 mm[.047 - .122 in]

Usage Conditions

Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

CSA Rating	208567
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1586105-3
3P RCPT VAL-U-LOK SR V2



TE Part # 2029054-3
3P VAL-U-LOK SR HDR SN V2 W/DH



TE Part # 2029150-3
3P R/A HDR VAL-U-LOK V2 W/P



TE Part # 2307184-3
3P PLUG SR VAL-U-LOK PM GW - TPA VERSION





TE Part # 2029058-3
3P VAL-U-LOK SR HDR SN V2 WODH



TE Part # 2307185-3
3P PLUG SR VAL-U-LOK FH GW - TPA
VERSION


Customers Also Bought




TE Part # 1879455-1
Wirewound Resistor: Mineral, 2.5 Kw




TE Part # 350779-4
04P UMNL PLUG HSG UL94VO

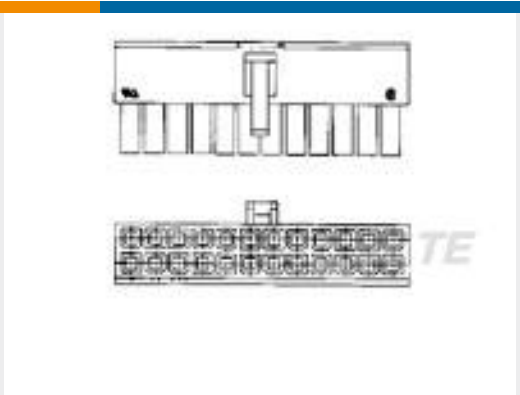

TE Part # 1-1586019-0
10P RCPT VAL-U-LOK V0

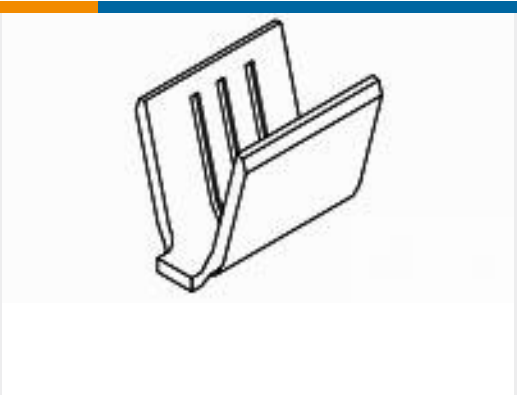

TE Part # 40552
SPLICE 3300 TO 9000 CMA TPBR

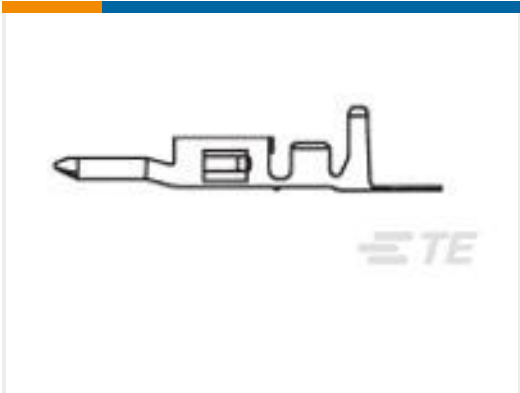

TE Part # 1586314-1
VAL-U-LOK PIN BR TN 22-18 LP



TE Part # 2213831-1
LUMAWISE ENDURANCE S BASE
ASSEMBLY, 80MM



TE Part # 6-1423008-8
T92S7D2X-24-99



TE Part # 240644-5
PLATE-REAR SHEAR

Documents

Product Drawings
3P PLUG VAL-U-LOK SR FH V2

English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1586103-3_C.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_1586103-3_C.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1586103-3_C.3d_stp.zip
English
3D PDF



English

Customer View Model

[ENG_CVM_1586103-3_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_1586103-3_A.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1586103-3_A.2d_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English