




Terminals & Splices > Quick Disconnects

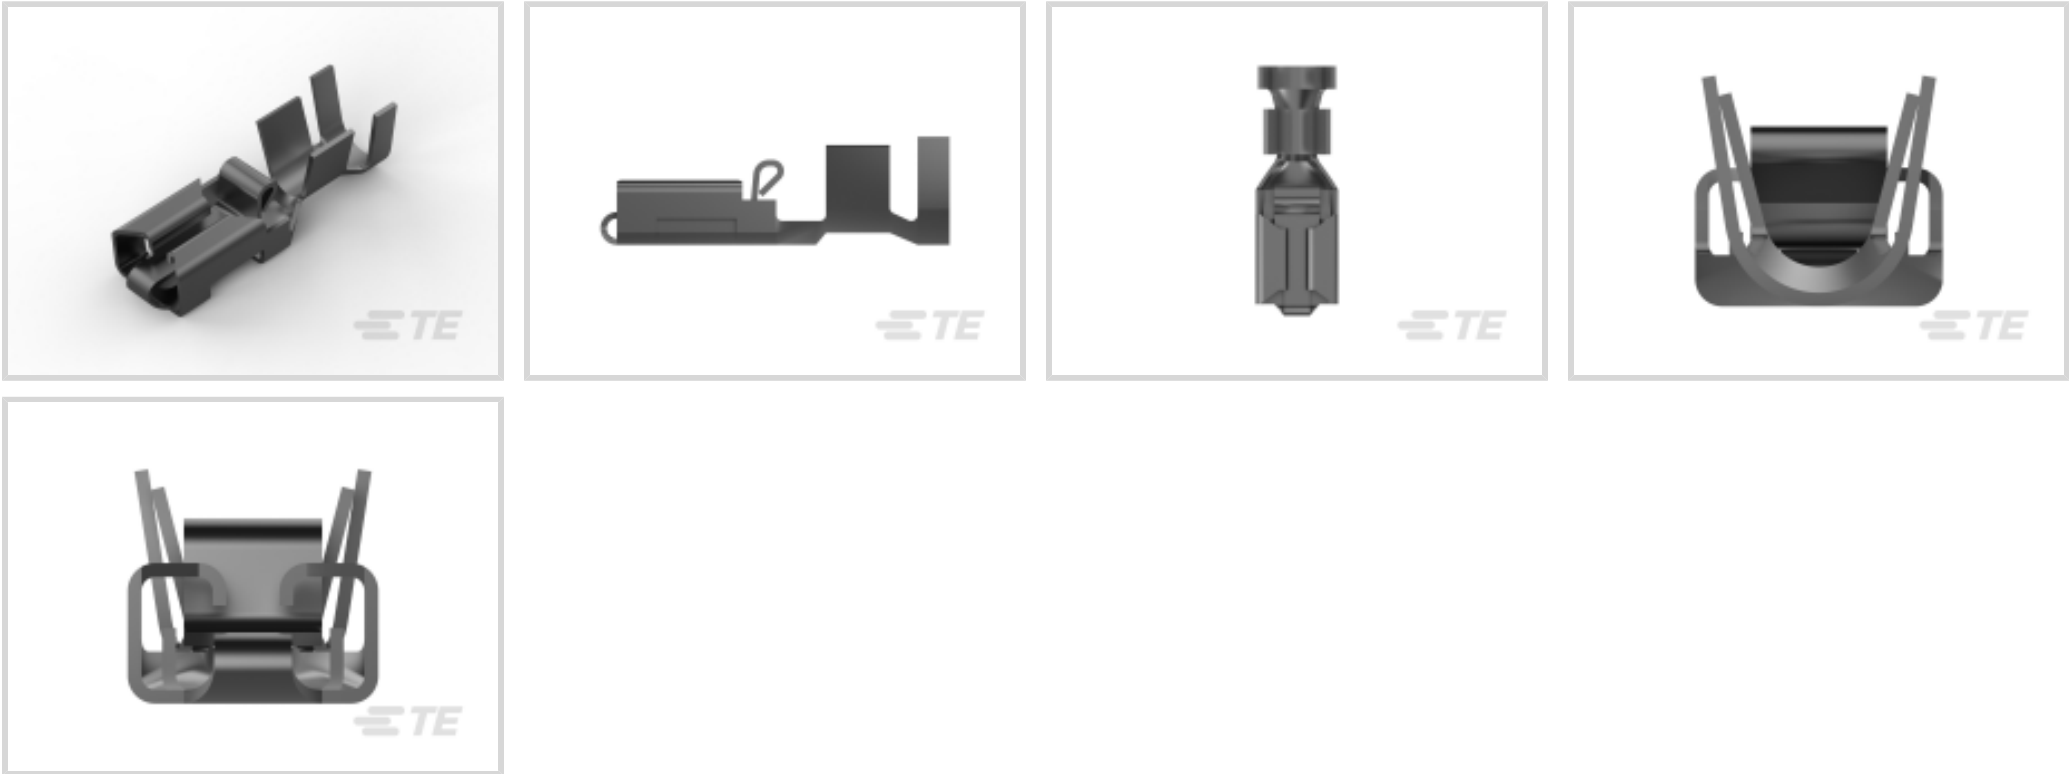

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **3.31 - 5.26 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	22.2 mm[.874 in]
Compatible Insulation Diameter Range	3.43 - 5.08 mm[.135 - .2 in]
Wire Size	3.31 - 5.26 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	1250
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 525651
DAHT POSITIVE LOCK 18-11 ASSY



TE Part # 180250
HHHT FSTON/FF 375 POS LOC 250 6-2 ASSY



TE Part # 2151487-2
OCEAN_2.0_Applicator-S-160F210F-RSA



TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp




TE Part # 7-2151487-7
OCEAN_2.0_SPARE_PART_KIT-160F210F




TE Part # 7-2151487-2
OCEAN_2.0_Applicator-S-160F210F


Also in the Series | Mark I

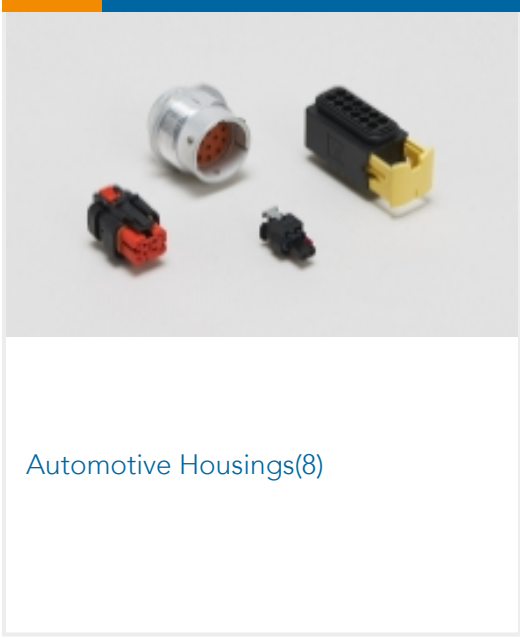


Automotive Housings(8)

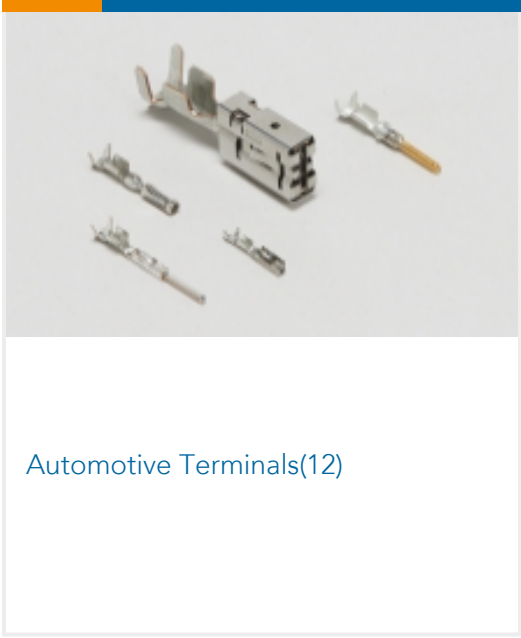


Automotive Terminals(12)

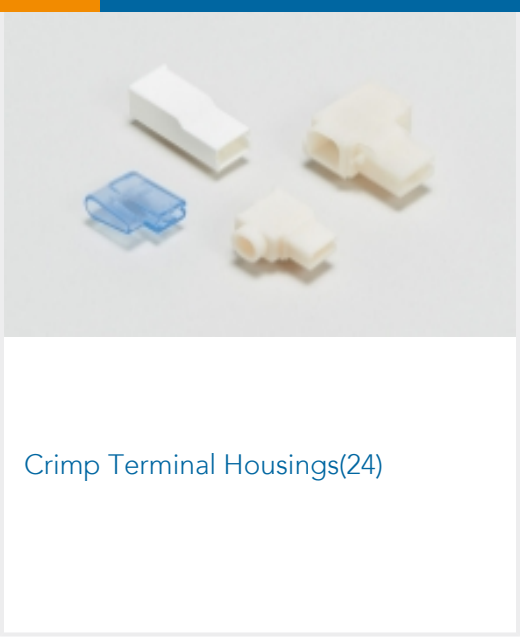

Crimp Terminal Housings(24)

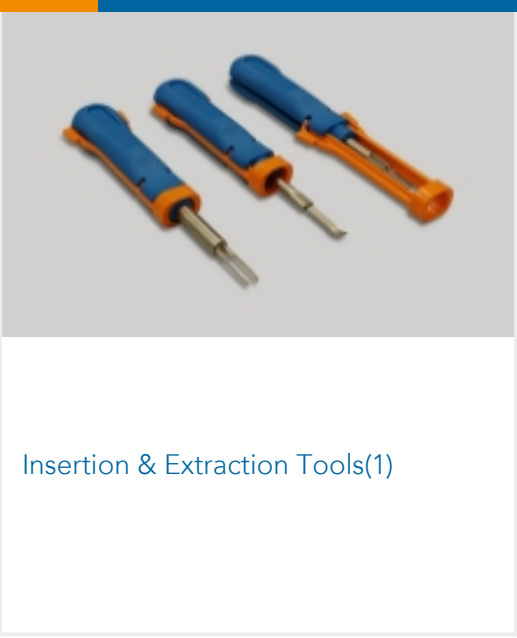

Insertion & Extraction Tools(1)

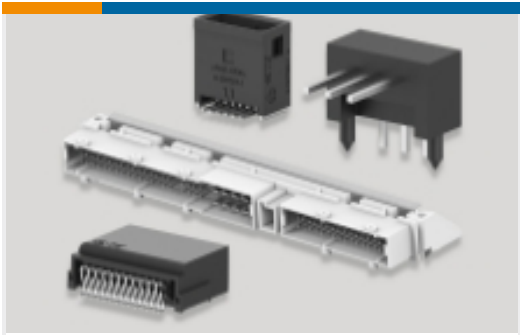

PCB Headers & Receptacles(21)



Quick Disconnects(29)

Also in the Series | Positive Lock 250



Automotive Terminals(1)



Crimp Terminal Housings(192)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)




Quick Disconnects(186)

Customers Also Bought



TE Part # 1-1355849-1
AMP MCP 9.5, CONTACT, LANCELESS

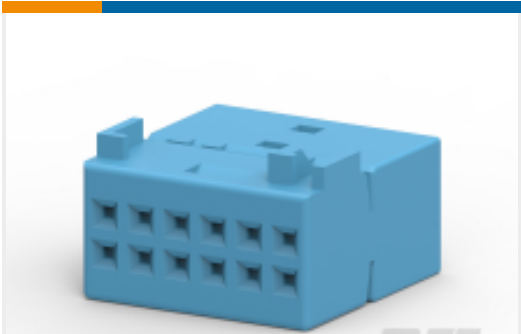

TE Part # 2278598-1
12POS MQS REC



TE Part # 4-968972-1
MCP2,8 GEH ASSY 12P



TE Part # 1456987-1
2x4 Fem unsealed LP assy Key A



TE Part # 2208277-3
60POS MQS REC SEALED



TE Part # 2359941-6
96POS,MCON-1.2 CB,REC HSG,ASSY




TE Part # 2359943-1
96POS,MCON-1.2 CB,REC HSG,ASSY



TE Part # 2359943-2
96POS,MCON-1.2 CB,REC HSG,ASSY



TE Part # 8-1564284-6
96POS,MCON-1.2 CB,REC HSG,ASSY

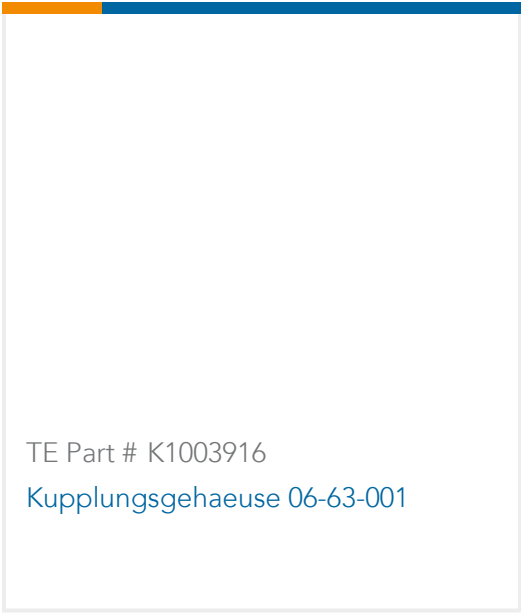

TE Part # K1003916
Kupplungsgehaeuse 06-63-001

Documents

Product Drawings

PL RECEPTACLE 3.3-6 MM2 TPPHBZ

English

CAD Files

Customer View Model

ENG_CVM_CVM_790319-5_AB.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_790319-5_AB.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_790319-5_AB.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

AMP positive lock MKI rec. terminal with latching device

Application Specification

Application Specification

English

APPLICATION SPECIFICATION FOR: AMP POSITIVE LOCK REC. TERMINAL MKI (SPECIFICA DI APPLICAZIONE PER TERMINALE AMP POSITIVE LOCK RECEPTACLE MKI)

English