

8-215079-2

✓ ACTIVE

Micro-MaTch | Micro-MaTch Industrial


TE Internal #: 8-215079-2

Ribbon Cable Connectors, Board-to-Board / Wire-to-Board, 12 Position, 1.27 mm [.05 in] Centerline, Vertical, Micro-MaTch Industrial

[View on TE.com >](#)

Connectors &gt; PCB Connectors &gt; Wire-to-Board Connectors &gt; FFC, FPC &amp; Ribbon Connectors &gt; Ribbon Cable Connectors &gt;

Female-on-Board Connector, Top Entry

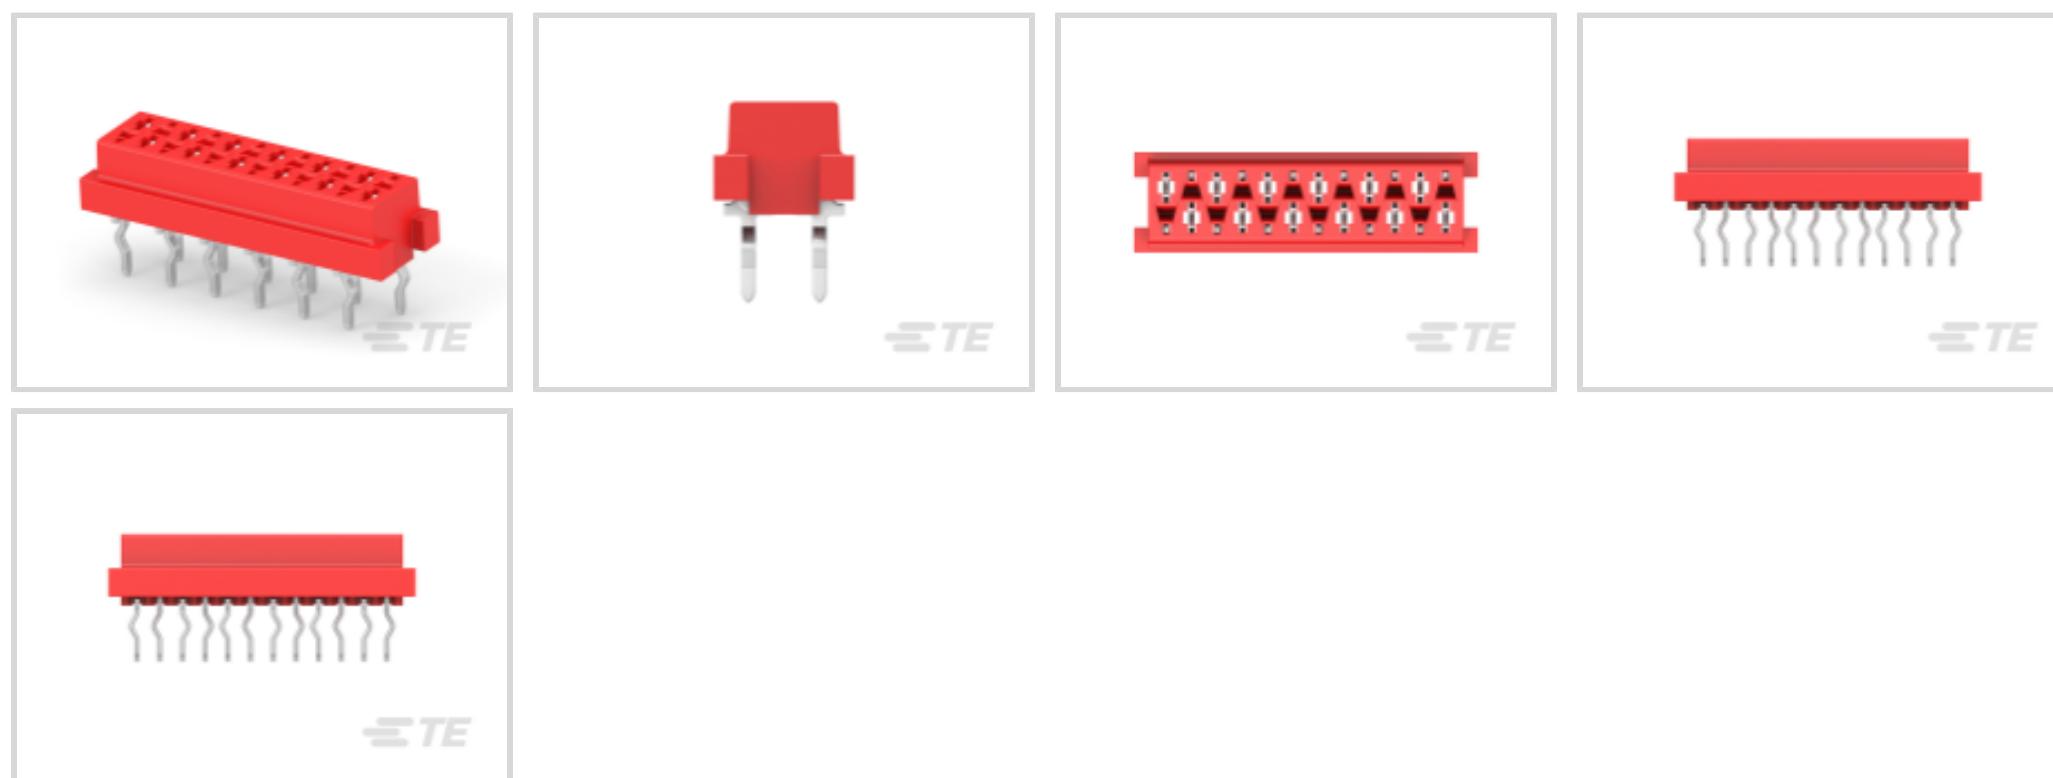Connector System: **Board-to-Board, Wire-to-Board**Number of Positions: **12**Centerline (Pitch): **1.27 mm [.05 in]**PCB Mount Retention: **With**PCB Mount Retention Type: **Kinked Solder Tails**[All Female-on-Board Connector, Top Entry \(67\)](#)

## Features

### Product Type Features

Ribbon Cable Connector Type	Female-on-Board
Ribbon Cable Connector Header Type	Shrouded
Connector Product Type	Connector Assembly
Connector System	Board-to-Board, Wire-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Number of Positions	12
PCB Mount Orientation	Vertical
Number of Rows	2

### Electrical Characteristics

Insulation Resistance	1000 MΩ
-----------------------	---------

Operating Voltage	100 VAC
-------------------	---------

### Body Features

Daisy Chain	Without
Primary Product Color	Red
Connector Profile	Standard

### Contact Features

PCB Contact Termination Area Plating Material Thickness	3 - 5 $\mu\text{m}$ [118.11 - 196.85 $\mu\text{in}$ ]
Contact Type	Socket
Contact Mating Area Plating Material Thickness	3 - 5 $\mu\text{m}$ [118.11 - 196.85 $\mu\text{in}$ ]
Contact Mating Area Plating Material	Tin
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	1 A

### Termination Features

Rectangular Termination Post & Tail Thickness	.25 mm[.01 in]
Rectangular Termination Post & Tail Width	.5 mm[.02 in]
Termination Post & Tail Length	3.1 mm[.122 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

### Mechanical Attachment

Mating Alignment	With
Contact Retention Type Within Housing	Press-Fit
PCB Mount Alignment	Without
PCB Mount Retention	With
PCB Mount Retention Type	Kinked Solder Tails
Mating Retention	With
Mating Retention Type	Contact Friction
Connector Mounting Type	Board Mount

### Housing Features

Mating Entry Location	Top
-----------------------	-----

Housing Material

PBT GF

Centerline (Pitch)

1.27 mm [.05 in]

**Dimensions**

Connector Length

17.3 mm [.681 in]

Connector Height

4 mm [.16 in]

PCB Thickness (Recommended)

1.6 mm [.062 in]

Row-to-Row Spacing

2 mm [.059 in]

**Usage Conditions**

Operating Temperature Range

-40 - 105 °C [-40 - 221 °F]

**Operation/Application**

Solder Process Feature

Board Standoff

Circuit Application

Signal

**Industry Standards**

UL Rating

Recognized

Compatible With Agency/Standards Products

UL

Compatible With Approved Standards Products

UL E28476

UL Flammability Rating

UL 94V-0

**Packaging Features**

Packaging Quantity

250

Packaging Method

Box &amp; Carton

**Product Compliance**For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024 (240)

Candidate List Declared Against: JAN 2024 (240)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl &gt; 900 ppm.

Solder Process Capability

Wave solder capable to 265°C

## Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # CAT-M5833-M2934  
Male-on-Wire Connector, Micro-MaTch



TE Part # CAT-M5833-C8684  
Crimp-on-Snap-in Housing




TE Part # CAT-M5833-C1121  
MICRO-MATCH STD MOW TO MOW  
CABLE ASSY




TE Part # CAT-M5833-M2934  
Male-on-Board Connector, Micro-MaTch




TE Part # CAT-M5833-C1121A  
MICRO-MATCH STD PB TO MOW  
CABLE ASSY

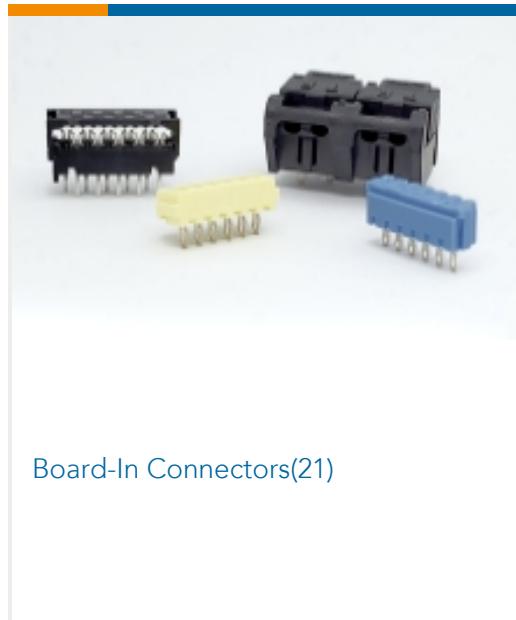Also in the Series | **Micro-MaTch Industrial**


Board-In Connectors(21)

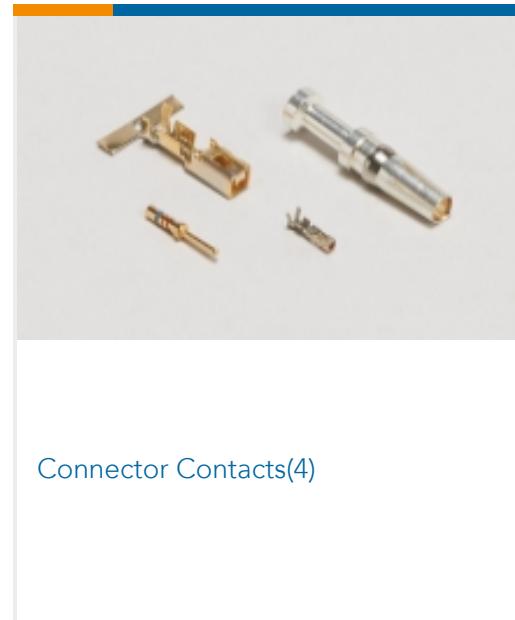


Connector Contacts(4)

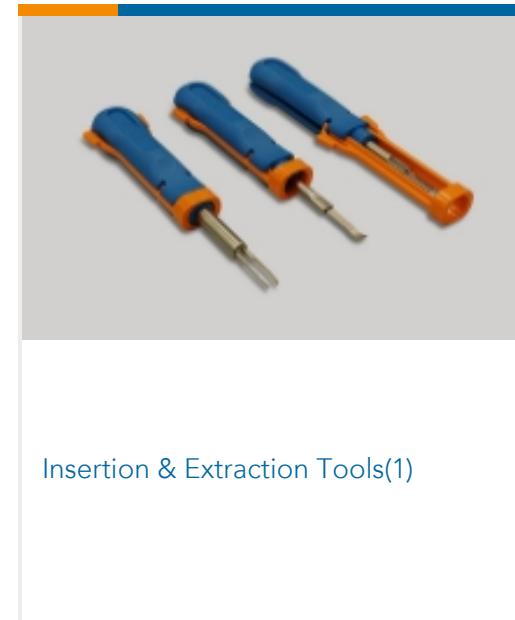

Insertion & Extraction Tools(1)

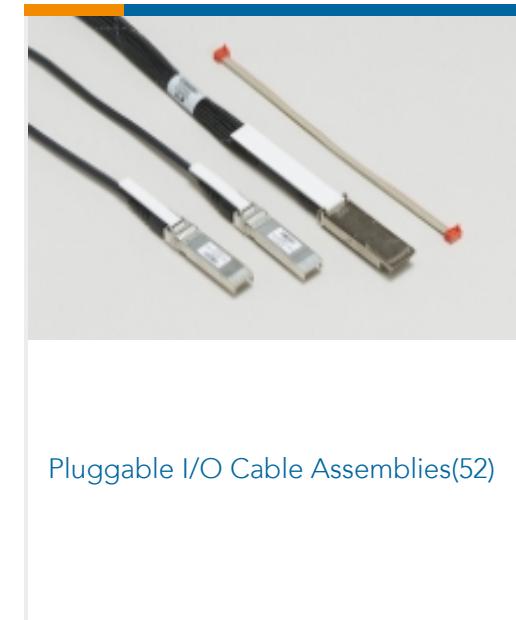


Pluggable I/O Cable Assemblies(52)

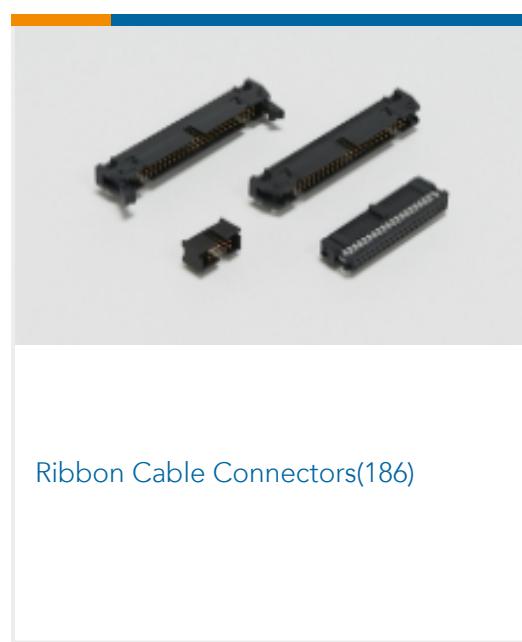

Ribbon Cable Connectors(186)

## Customers Also Bought

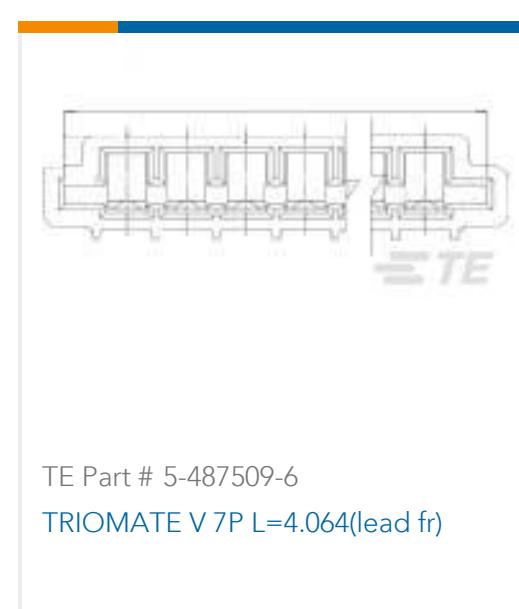TE Part # 7-215079-4  
MICRO-MATCH FOB.04PTE Part # 5172069-1  
12P DRAWER FEM.ASSYTE Part # 826631-2  
2P AMPMODU II PIN HEADERTE Part # 2-1761608-9  
IDC LOW PRO HDR 26P VERT SHT  
LAT BLUETE Part # 5052844025  
RNF-100-3/64-0-SPTE Part # 927768-3  
JPT REC 2.8 Contact SRC SnTE Part # 5-487509-6  
TRIOMATE V 7P L=4.064(lead fr)TE Part # CFS60383P-30NF  
OMNI,DBAND,30cm,NF 600-3800MHz,  
3dBi,LPIM

## Documents

### Product Drawings

#### MICRO-MATCH FOB.12P

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

#### [ENG\\_CVM\\_CVM\\_8-215079-2\\_T.2d\\_dxf.zip](#)

English

#### Customer View Model

#### [ENG\\_CVM\\_CVM\\_8-215079-2\\_T.3d\\_igs.zip](#)

English

#### Customer View Model

#### [ENG\\_CVM\\_CVM\\_8-215079-2\\_T.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Datasheets & Catalog Pages****Micro-MaTch Catalog**

English

**Ribbon Cable Interconnect Solutions**

English

**Centerline Micro-Match Connector Series**

English

---

**Product Specifications****Product Specification**

English

---

**Agency Approvals****UL Report**

English