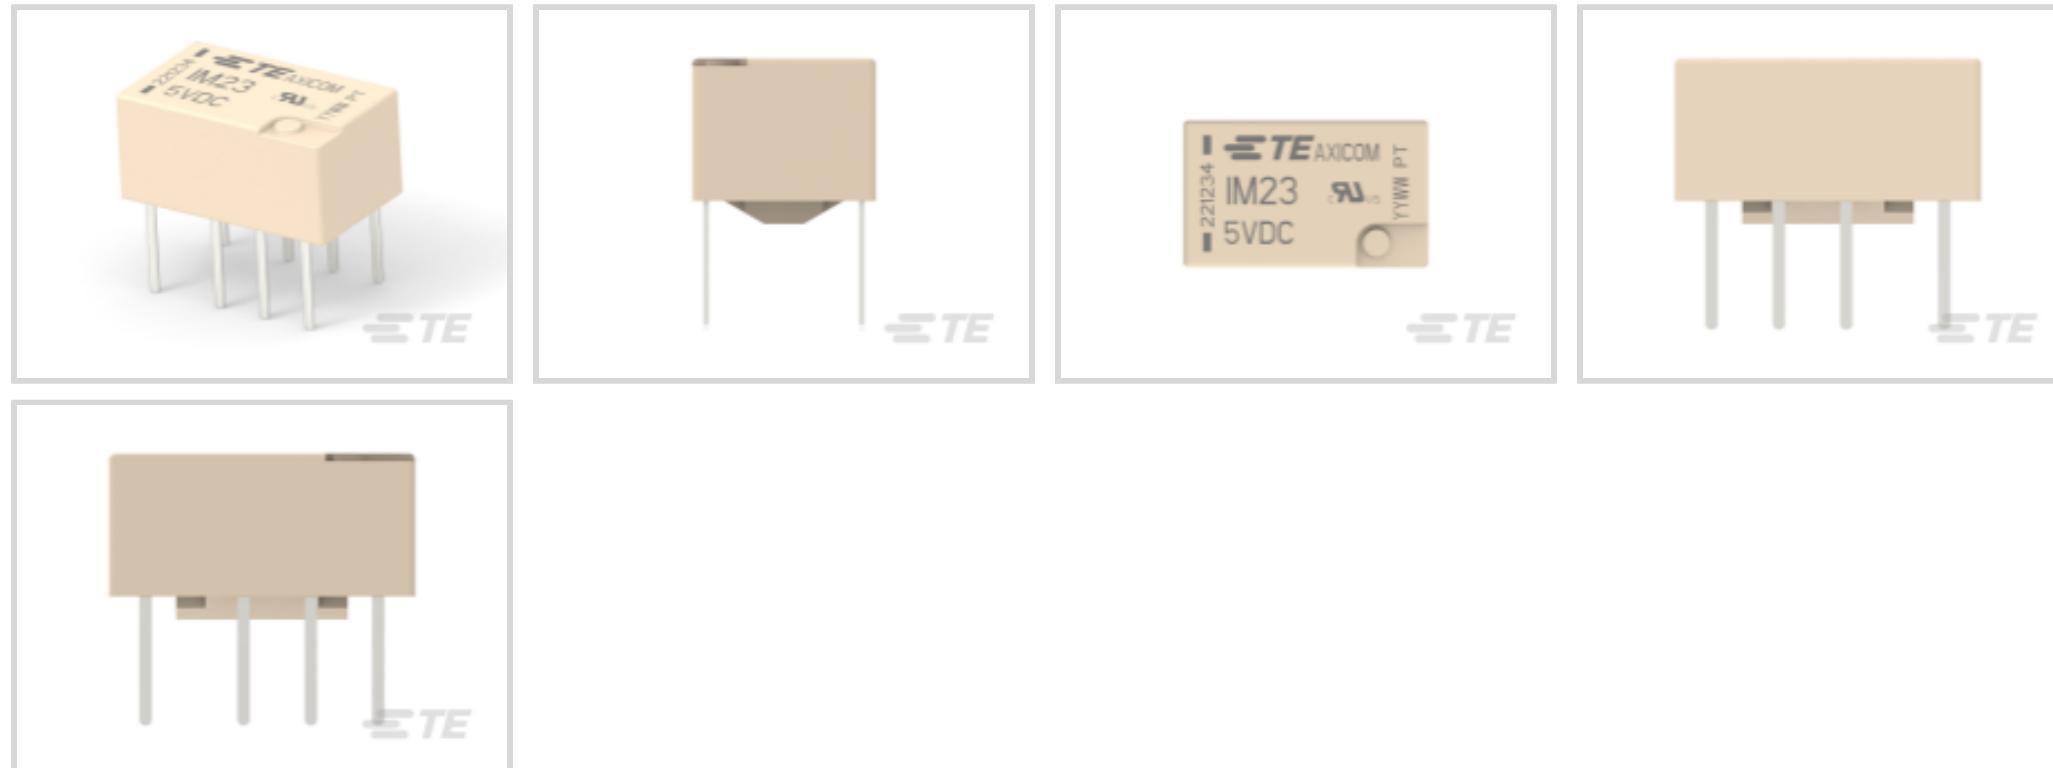


Relays &amp; Contactors &gt; Relays &gt; Signal Relays &gt; Standard Signal Relay 2 Form C,2 CO Cont

Contact Voltage Rating: **220 VDC**Coil Power Rating DC: **50 mW**Isolation (HF Parameter): **-18.8dB @ 900MHz, -37dB @ 100MHz**Insertion Loss (HF Parameter): **-.03dB @ 100MHz, -.33dB @ 900MHz**[All Standard Signal Relay 2 Form C,2 CO Cont \(74\)](#)

## Features

### Configuration Features

Insulation Special Features	2500V Initial Surge Withstand Voltage between Contacts & Coil
Contact Special Features	Bifurcated/Twin Contacts, Short THT Pins
Coil Special Features	Ultra High Sensitive Version
Contact Arrangement	2 Form C (2 CO)
Contact Number of Poles	2

### Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	2 A
Contact Limiting Short-Time Current	2 A
Contact Limiting Continuous Current	2 A
Voltage Standing Wave Ratio (HF Parameter)	1.06 @ 100MHz, 1.49 @ 900Mhz
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Insulation Initial Dielectric Between Contacts & Coil	1800 Vrms

Insulation Initial Resistance	1000000 MΩ
Contact Limiting Breaking Current	2 A
Contact Switching Load (Min)	.1mA @ .0001V
Coil Resistance	500 Ω
Contact Voltage Rating	220 VDC
Coil Power Rating DC	50 mW
Coil Voltage Rating	5 VDC
Contact Current Rating	2 A
Contact Switching Voltage (Max)	220 VDC

#### Signal Characteristics

Isolation (HF Parameter)	-18.8dB @ 900MHz, -37dB @ 100MHz
Insertion Loss (HF Parameter)	-.03dB @ 100MHz, -.33dB @ 900MHz

#### Body Features

Product Weight	.75 g [.026 oz]
----------------	-----------------

#### Contact Features

Contact Plating Material	Gold
Contact Material	PdRu+Au

#### Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	PCB Pins

#### Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

#### Dimensions

Product Width	6 mm [.236 in]
Product Length	10 mm [.393 in]
Product Height	5.65 mm [.222 in]

#### Usage Conditions

Environmental Ambient Temperature (Max)	85 °C [185 °F]
Operating Temperature Range	-40 - 85 °C

#### Operation/Application

Actuating System	DC
------------------	----

Solder Process

Wave Solder

Performance Type

Standard

Coil Magnetic System

Monostable, Polarized

**Packaging Features**

Packaging Method

Tube

**Other**

Length Class (Mechanical)

0 - 10 mm

Environmental Ambient Temperature Class

70 - 85 °C

Height Class (Mechanical)

0 - 6 mm

Coil Power Rating Class

50 - 300 mW

Width Class (Mechanical)

0 - 6 mm

Contact Current Class

0 - 2 A

**Product Compliance**For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024  
(240)Candidate List Declared Against: JAN 2024  
(240)

Does not contain REACH SVHC

Halogen Content

Low Bromine/Chlorine - Br and Cl < 900  
ppm per homogenous material. Also BFR  
/CFR/PVC Free

Solder Process Capability

Wave solder capable to 265°C

**Product Compliance Disclaimer**


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 3-1462039-0  
IM23TS=IM RELAY 50mW 5V

## Also in the Series | Axicom IM

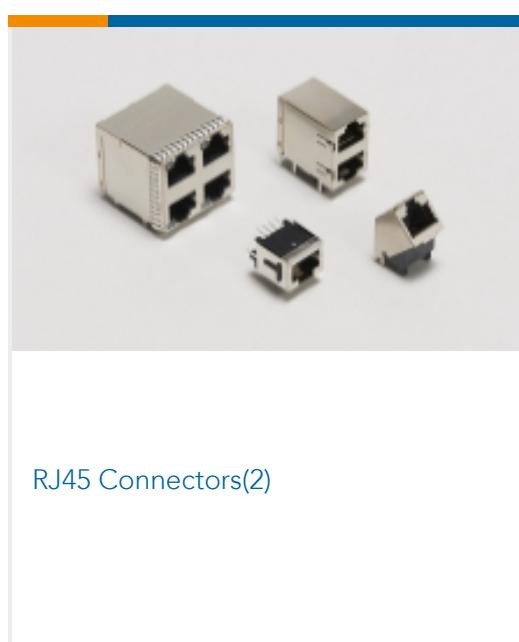

RJ45 Connectors(2)



Signal Relays(154)

## Customers Also Bought



TE Part # 5646529-1  
Z-PACK 2MM HM TYPE A/B 169P



TE Part # 8-1614882-3  
CPF 0603 4R7 0.1% 25PPM 1K RL




TE Part # 3-1614354-4  
RN 0603 61R9 0.1% 10PPM CUT LENGTH



TE Part # 2176347-9  
CRGCQ 2010 47R 1%



TE Part # 2176366-3  
RQ 0603 453R 0.1% 10PPM 1K RL

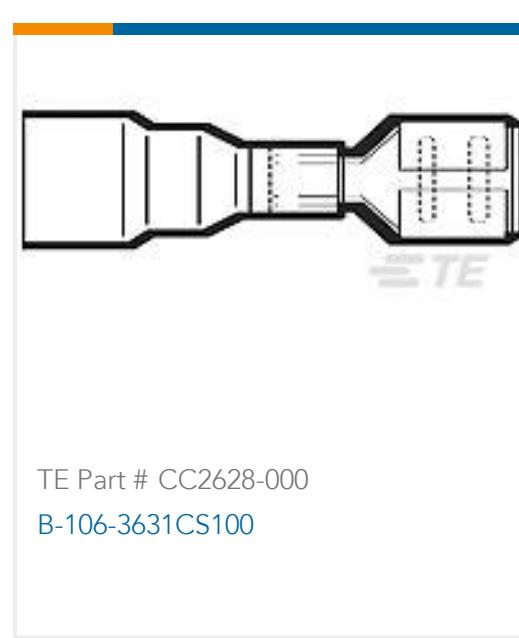

TE Part # CC2628-000  
B-106-3631CS100

## Documents

### Product Drawings

[IM23KS=IM RELAY 50mW 5V short pins](#)

English

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_6-1462039-7\\_B5.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_6-1462039-7\\_B5.3d\\_stp.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_6-1462039-7\\_B5.2d\\_dxf.zip](#)

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

#### [Transportation, Storage, Handling, Assembly and Testing of Axicom Through Hole Terminal \(THT\) Relays](#)

English

#### [IM\\_Datasheet](#)

English

---

### Product Specifications

#### [Definitions General Purpose Relays](#)

English

---

### Agency Approvals

#### [VDE Certificate](#)

English