




Terminals & Splices > Quick Disconnects

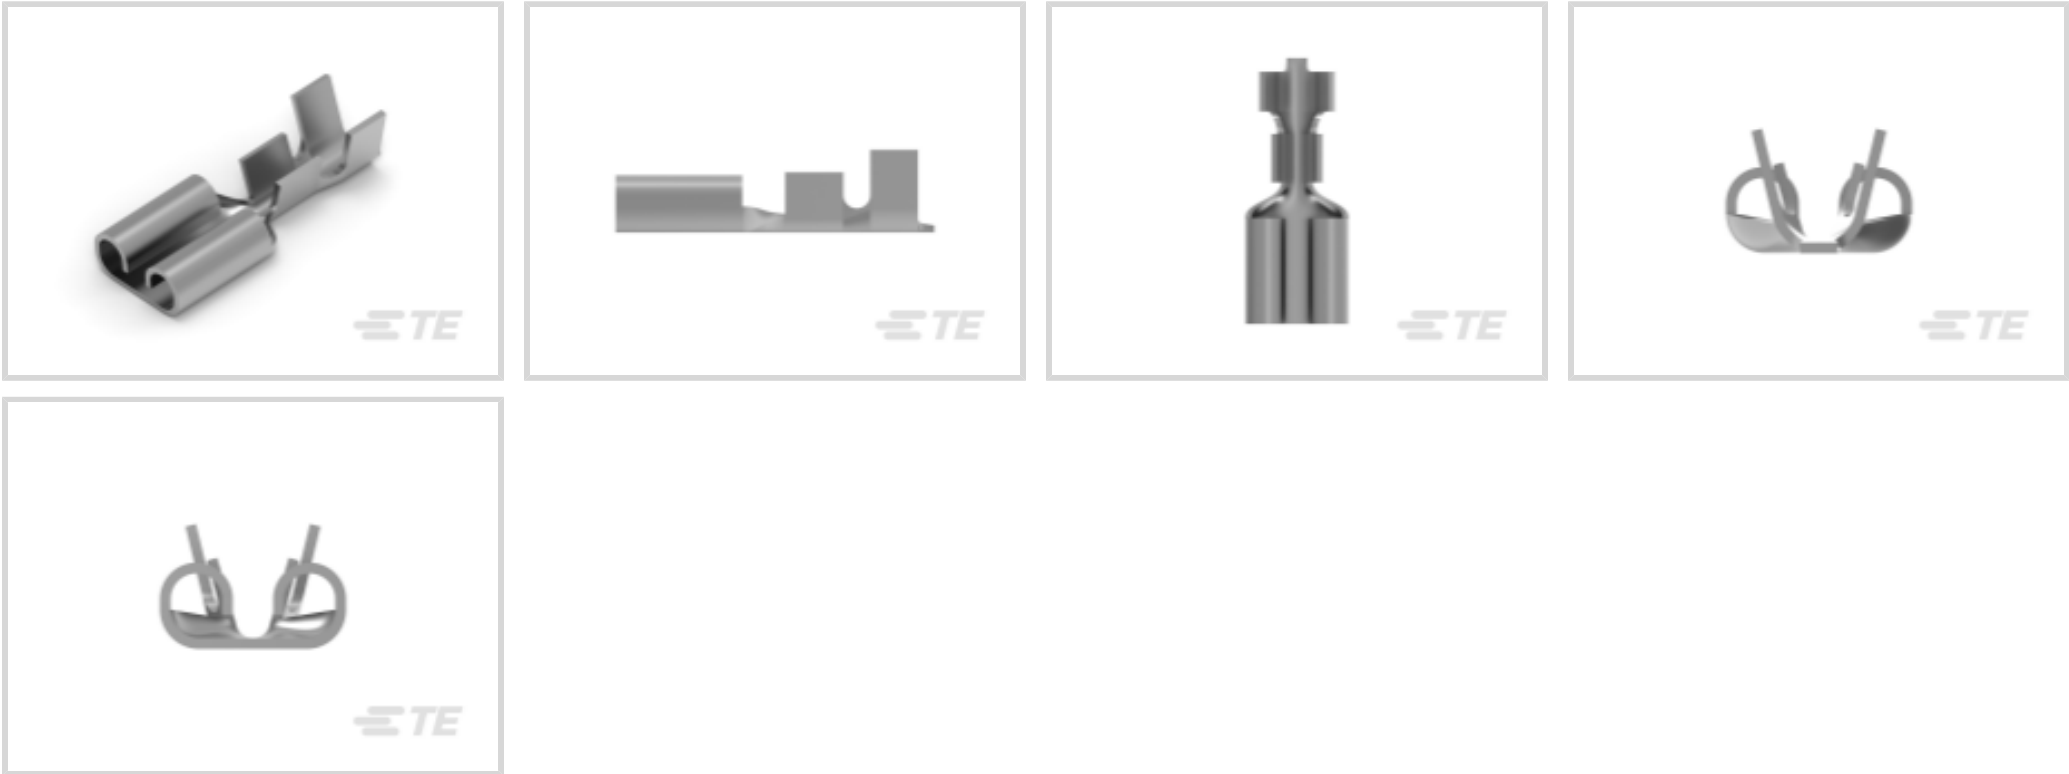

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 - 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.43 mm[.017 in]
Product Length	18.9 mm[.744 in]
Compatible Insulation Diameter Range	2.5 - 4.32 mm[.098 - .17 in]
Wire Size	.82 - 2.08 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	5000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 42400-2 250 FASTON REC 18-14 AWG TPBR	 TE Part # 170213-3 250 FASTON,REC.,18-14 AWG,TPPB	 TE Part # 42660-2 250 FASTON REC 18-14 AWG TPBR	 TE Part # 170224-2 250 FASTON,REC.,16-10 AWG,BR
 TE Part # 63306-2 250 FASTON REC 18-14 AWG TPBR	 TE Part # 170213-1 250 FASTON,REC.,18-14 AWG,BR	 TE Part # 170213-2 250 FASTON,REC.,18-14 AWG,TPBR	 TE Part # 2232247-1 250 FASTON,REC.,16-10 AWG,BR
 TE Part # 735211-2 250 FASTON REC 14-10 AWG TPBR	 TE Part # 60650-2 250 FASTON FLAG REC 18-14 AWG TPBR	 TE Part # 60713-1 FASTON 250 REC 18-14 AWG BR	

Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(133)



Insertion & Extraction Tools(6)



Magnet Wire Terminals(1)



PCB Terminals(134)



Quick Disconnects(441)



Splices(4)


Customers Also Bought



TE Part # 1-770902-0
MINI UMNL SOK 26-22 AWG AU



TE Part # 5-177899-1
POWER DBL LOCK PLUG HSG 3P (GWT)

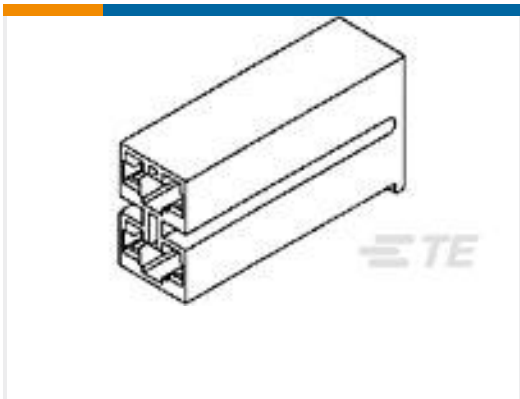

TE Part # 172210-1
POSITIVE LOCK 250 HOUSING RECEPTACLE



TE Part # 1217039-1
TIMER CONNECTOR GEN 3 18-14 POST-TPBR



TE Part # 5-179464-1
POWER DBL LOCK CAP HSG F/H 3P (GWT)



TE Part # 2-1743068-1
187 HSG. PL MKII REC. 5mm 3P NAT




TE Part # 2-1743216-1
GAS VALVE 2P HSG GWT



TE Part # 2-1743217-1
GAS VALVE 3P HSG GWT



TE Part # 2-2005820-9
CLUSTER BLOCK 3P CLIP HSG(GWT)

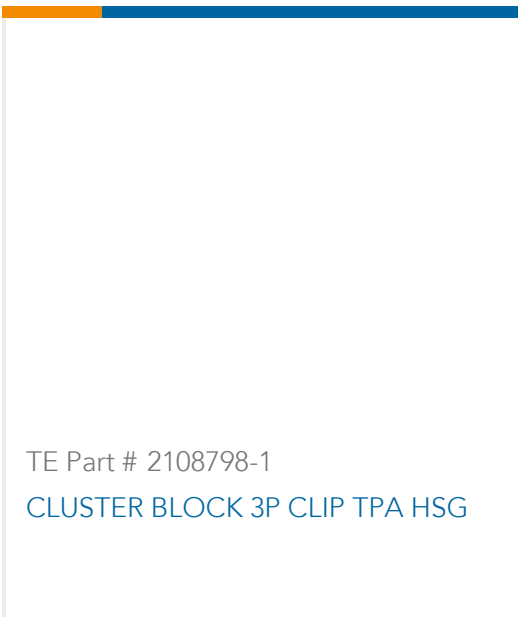

TE Part # 2108798-1
CLUSTER BLOCK 3P CLIP TPA HSG

Documents



Product Drawings

250 FASTON,REC.,18-14 AWG,TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2232112-1_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2232112-1_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2232112-1_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

Agency Approval Document

English