




Terminals & Splices > Quick Disconnects

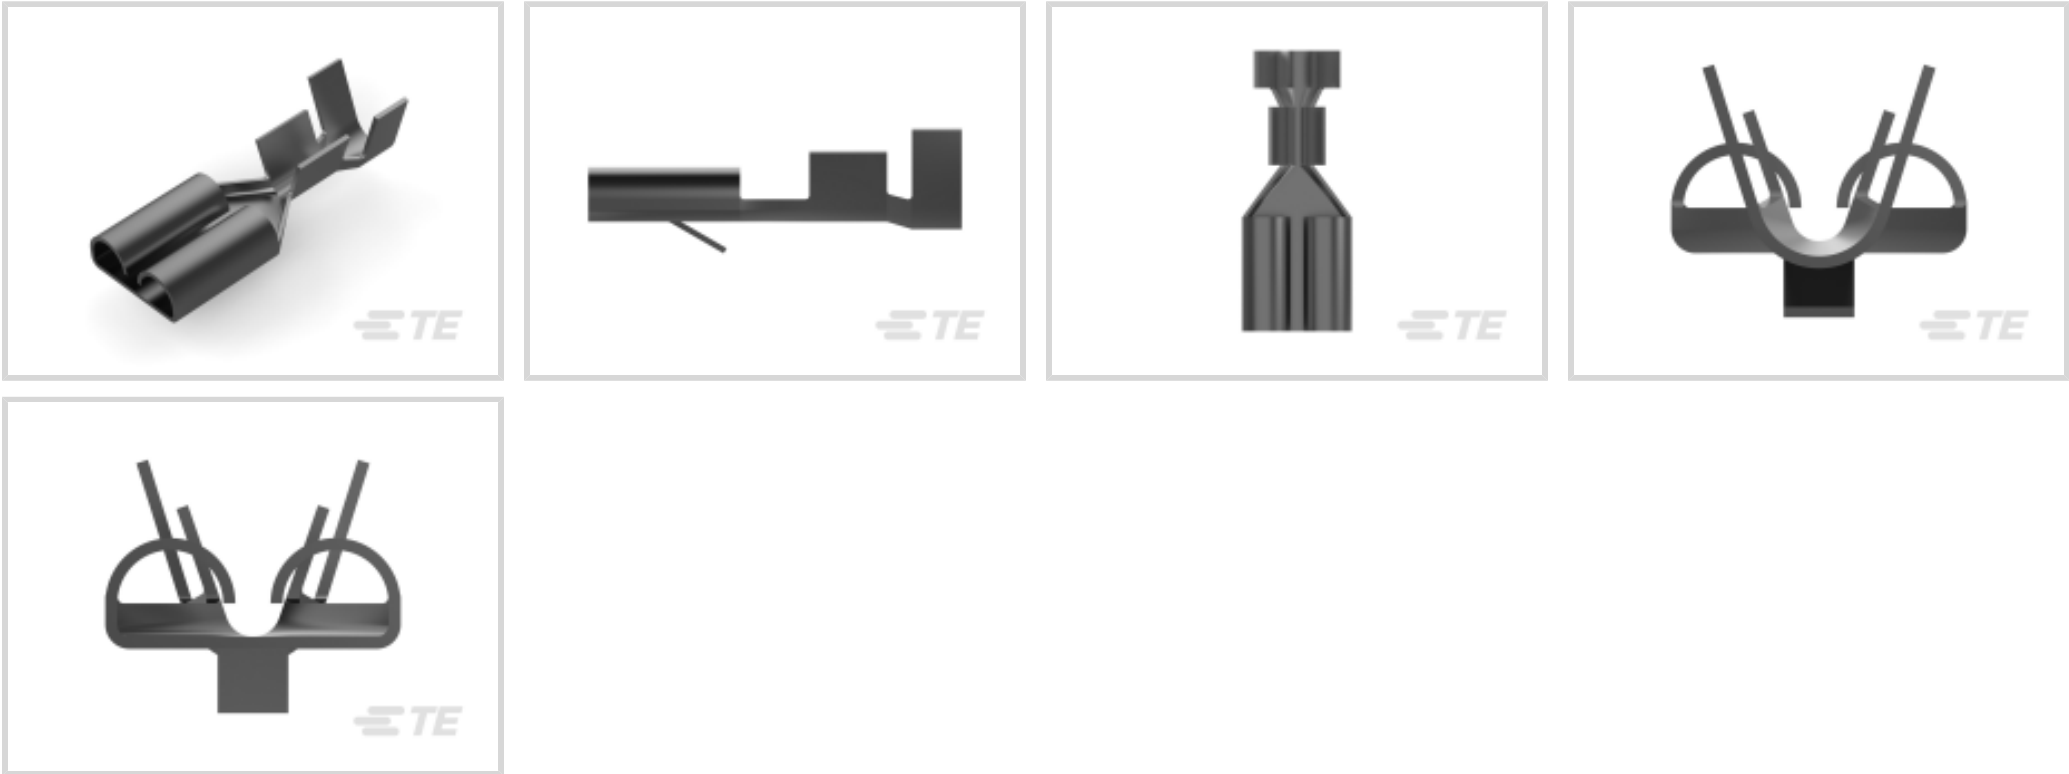

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1.03 - 2.62 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	19.6 mm[.771 in]
Compatible Insulation Diameter Range	3.1 - 4.1 mm[.12 - .16 in]
Wire Size	1.03 - 2.62 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Packaging Features

Packaging Quantity	4000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

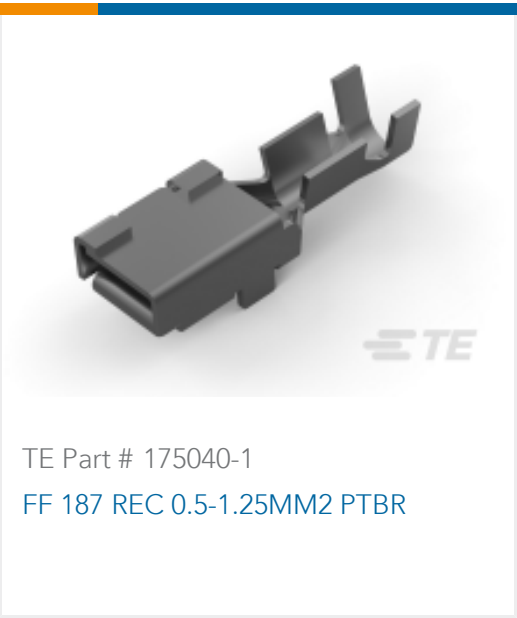 TE Part # 720725-1 DAHT 250 FASTIN-ON TAB REC 18-14 ASSY	 TE Part # 1-1579007-4 EXTRACTION TOOL	 TE Part # 4-1579007-3 EXTRACTION TOOL KIT	 TE Part # 175040-1 FF 187 REC 0.5-1.25MM2 PTBR
 TE Part # 175042-1 FF 187 REC 2-3MM2 PTBR	 TE Part # 160920-4 FF 312 REC 2.5-4MM2 TPPB	 TE Part # 180398-2 FF 250 REC 1-2.5MM2 TPBR	 TE Part # 180398-5 FF 250 REC 1-2.5MM2 TPPB
 TE Part # 2150843-1 OCEAN_2.0_Applicator-E-100F180F-REM	 TE Part # 2150843-2 OCEAN_2.0_Applicator-E-100F180F-REA	 TE Part # 281197-5 FF 187 REC 1.0-2.5MM2 PTBR (RE REELING)	 TE Part # 281197-6 FF 187 REC 1.0-2.5MM2 PTBR
 TE Part # 7-2150843-7 OCEAN_2.0_SPARE_PART_KIT-100F180F	 TE Part # 7-2150843-1 OCEAN_2.0_Applicator-E-100F180F		

Also in the Series | FASTIN-FASTON 250



Crimp Terminal Housings(211)



Insertion & Extraction Tools(2)



PCB Terminals(2)




Quick Disconnects(254)

Customers Also Bought




TE Part # 154718-6
250 PL MKI REC. 18-14AWG PTPB

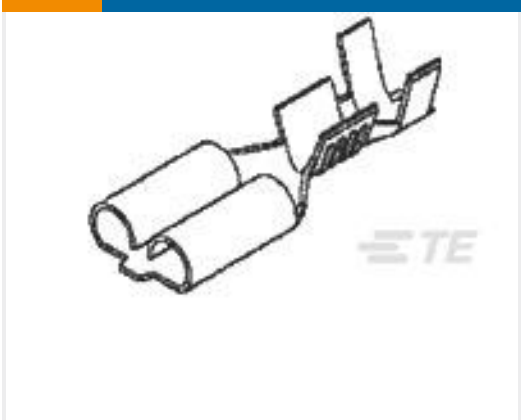

TE Part # 170258-2
FF 250 REC 14-12AWG TPBR REREELING



TE Part # 284844-2
AMP MCP, SEALED CONNECTOR HOUSING

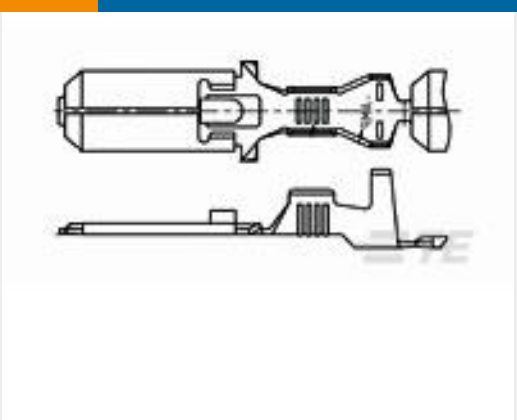

TE Part # 171633-1
E-J MK-2 250 TAB CONT



TE Part # 927824-2
SPT REC 6.3 Contact SRC Sn



TE Part # CH03586001
QSZH-125-NR3-40MM



TE Part # 282308-1
5MM PITCH RCPT CONTACT



TE Part # 1443995-1
BASE, 60 POSITION, BBD

Documents

Product Drawings

FF 250 REC 1-2.5MM2 TPPB

English

CAD Files

Customer View Model

ENG_CVM_CVM_280098-2_L.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_280098-2_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_280098-2_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Application Specification](#)

English