




Terminals & Splices > Quick Disconnects

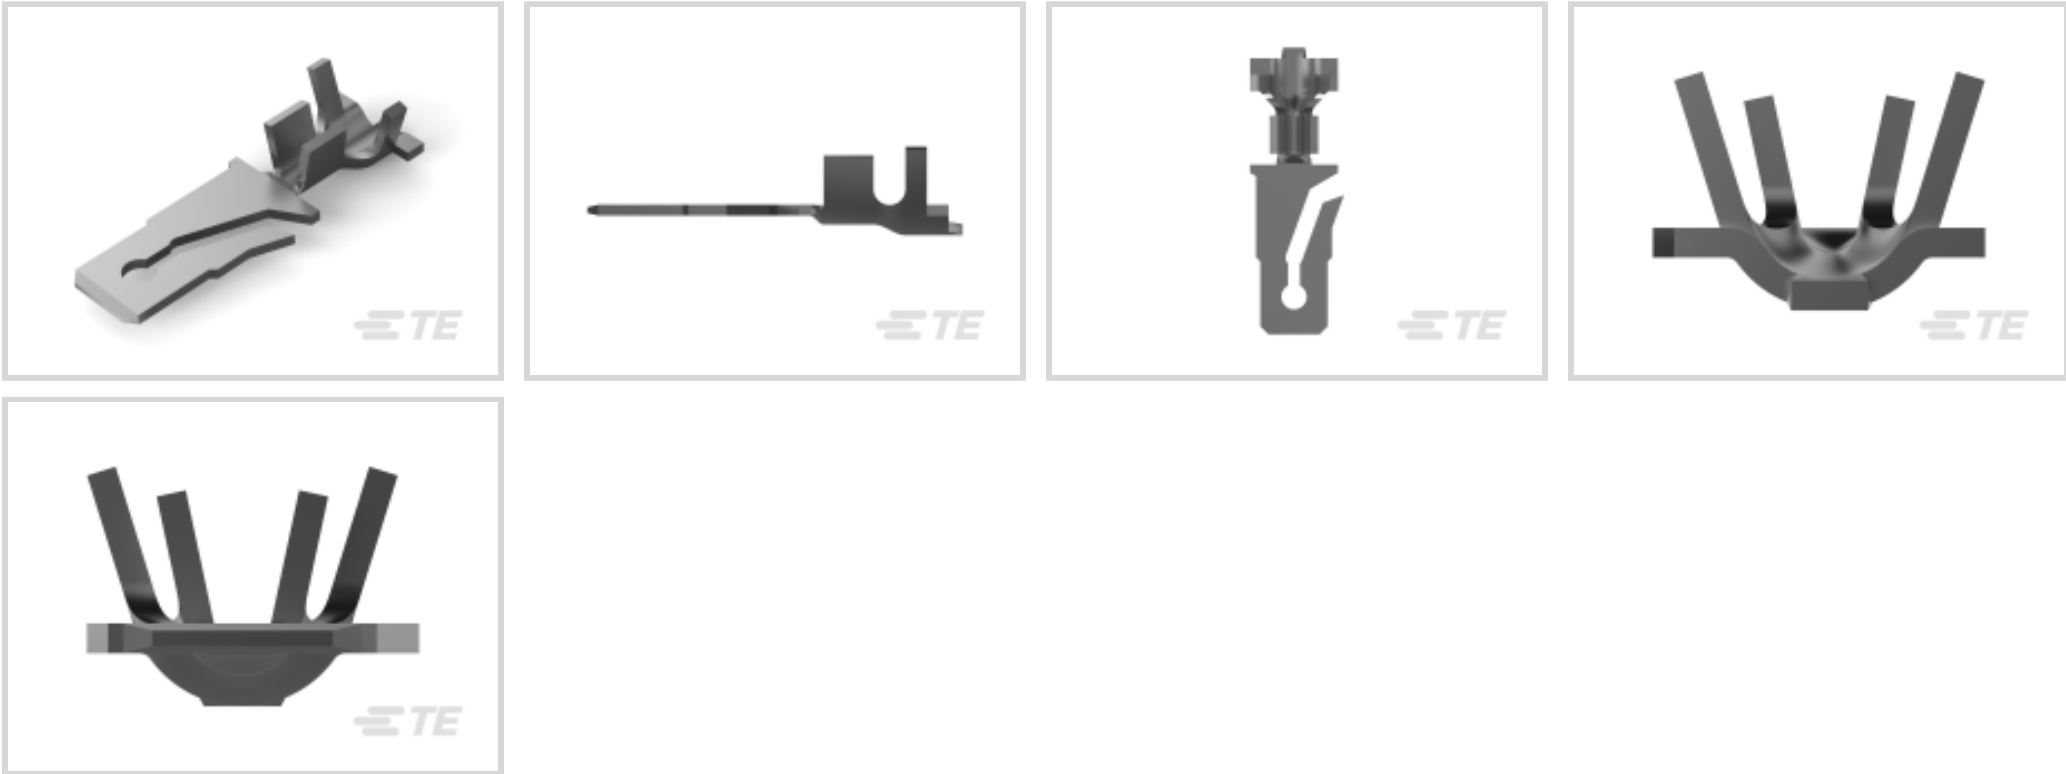

Quick Disconnect Terminal Type: **Tab**

Wire Size: **.82 - 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Terminal Orientation: **Straight**

Features

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------



Dimensions

Terminal Material Thickness	.79 mm[.031 in]
Product Length	25.83 mm[1.015 in]
Compatible Insulation Diameter Range	2.54 - 3.61 mm[.1 - .142 in]
Wire Size	.82 - 2.08 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	2500
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 2266704-1 OCEAN_2.0_Applicator-S-140F210F-RSM	 TE Part # 2266704-2 OCEAN_2.0_Applicator-S-140F210F-RSA	 TE Part # 466707-4 HDM SMPR140F210FK	 TE Part # 466707-5 HDM 5SMPR140F210F G
 TE Part # 7-2266704-7 OCEAN_2.0_SPARE_PART_KIT-140F210F	 TE Part # 7-2266704-1 OCEAN_2.0_Applicator-S-140F210F	 TE Part # 7-2266704-2 OCEAN_2.0_Applicator-S-140F210FA	


Also in the Series | FASTIN-FASTON 250

 Crimp Terminal Housings(211)	 Insertion & Extraction Tools(2)	 PCB Terminals(2)	 Quick Disconnects(254)
----------------------------------	-------------------------------------	----------------------	----------------------------


Customers Also Bought

 TE Part # 32837-1 TERMINAL,PIDG R 22-16 10	 TE Part # 770278-1 01P .062 COMM P&S PLUG	 TE Part # 1-1863005-2 UMNL 12 WAY PLUG HOUSING	 TE Part # 640417-2 BLADE REC 250 18-14AWG TPBR
---	--	---	---



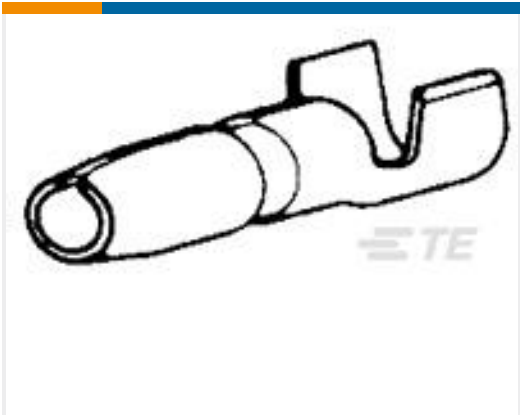

TE Part # 61802-1
[SHUR PLUG .156 18-14 AWG PTPBR](#)

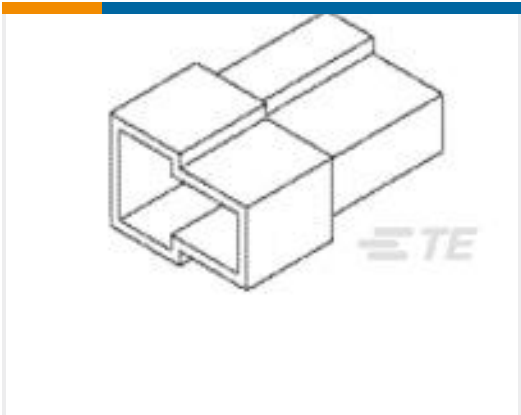

TE Part # 480116-3
[FF 250 TAB HSG 2P NYLON BLACK](#)



TE Part # 770277-1
[01P .062 COMM P&S RECPT](#)



TE Part # 174429-1
[PL 250 HOUSING RECEPTACLE](#)



TE Part # 1-1633961-7
[CRIMPER, INSULATION F PREMIUM](#)



TE Part # 1060-16-0177
[PIN, SF, SIZE 16, 14-18, SN/SN](#)

Documents

Product Drawings

[BLADE TAB 250 18-14AWG TPBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_640416-2_T_c-640416-2-t.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_640416-2_T_c-640416-2-t.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_640416-2_T_c-640416-2-t.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[FASTIN_FASTON_Product_Line](#)

English

Product Specifications

[Application Specification](#)

English

[Special 250 Blade Terminal](#)

English

640416-2

Quick Disconnects, Tab, 18 - 14 AWG Wire Size, .82 - 2.08 mm² Wire Size, Mating Tab
Width 6.35 mm [.25 in], Straight, Brass, FASTIN-FASTON 250

