




Terminals & Splices > Quick Disconnects

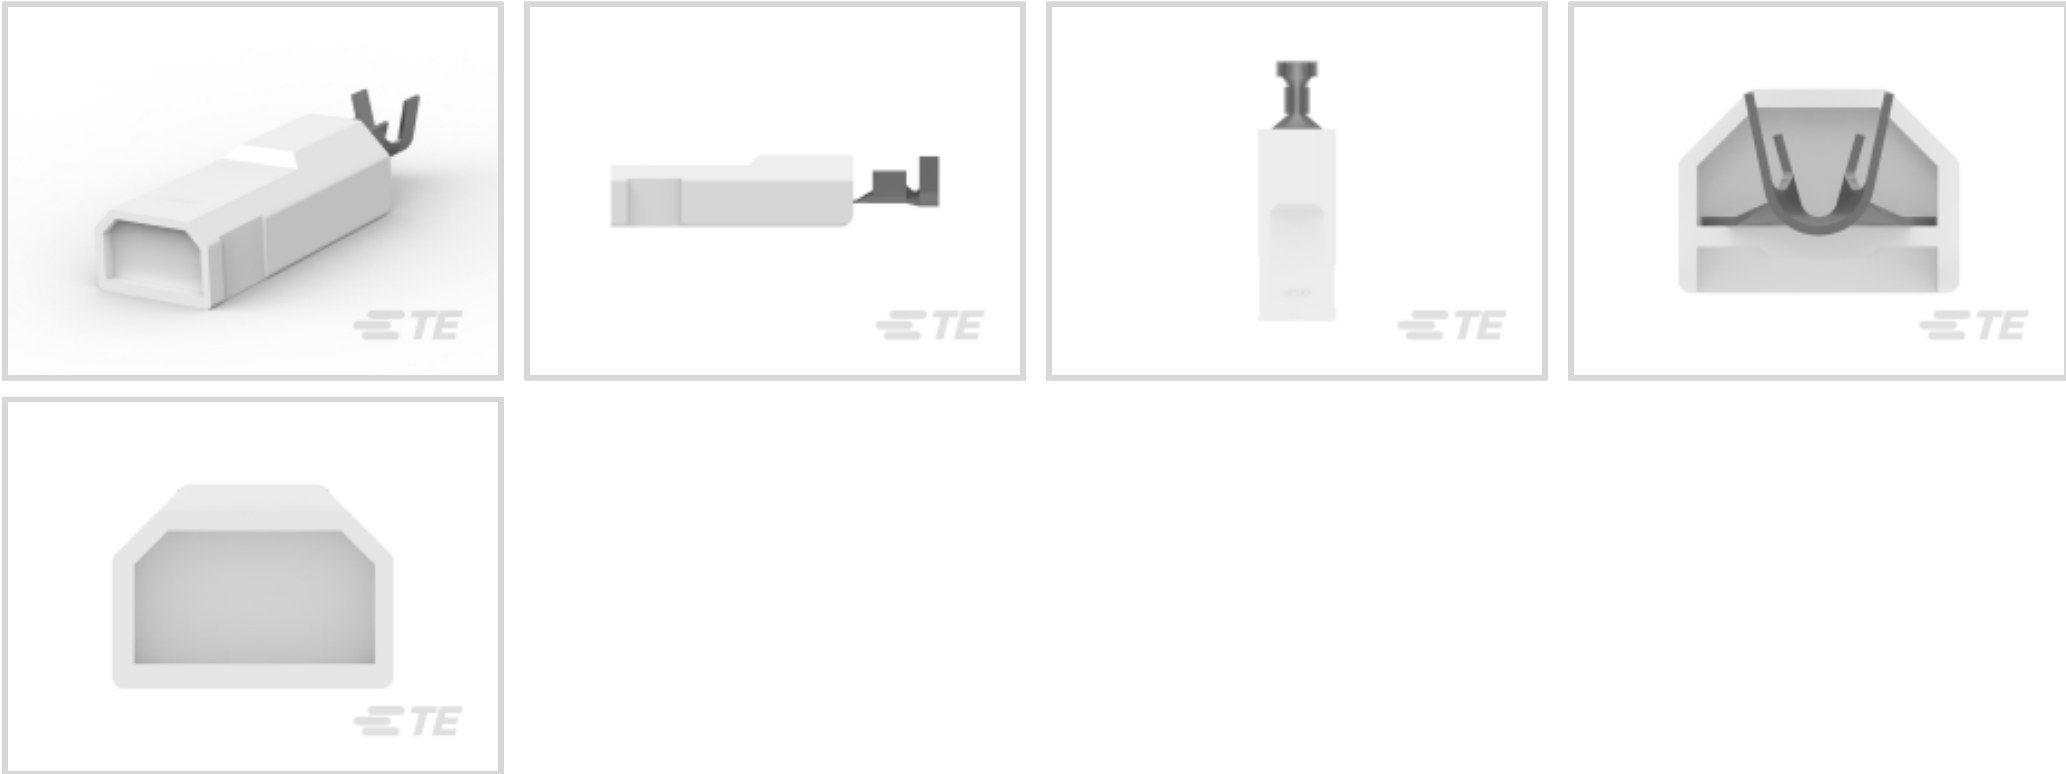

Quick Disconnect Terminal Type: **Tab**

Wire Size: **.82 - 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Open
Termination Features	
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Terminal Material Thickness	.4 mm[.015 in]
Product Length	38.87 mm[1.53 in]
Compatible Insulation Diameter Range	3.3 - 4.57 mm[.13 - .18 in]
Wire Size	.82 - 2.08 mm ²
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	-40 - 150 °C[-40 - 302 °F]
Industry Standards	
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E66717
UL Flammability Rating	UL 94V-2
Packaging Features	
Packaging Quantity	1500
Packaging Method	Strip/Reel
Other	
Barrel Color	Natural

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 521227-2
ULTRA-POD 250 ASSY TAB 12-10
AWG TPBR




TE Part # 521451-2
ULTRA-POD 250 ASSY TAB 18-14
AWG TPBR




TE Part # 521747-1
ULTRA-POD 250 ASSY TAB 18-14
AWG BR

Also in the Series | Ultra-Pod 250

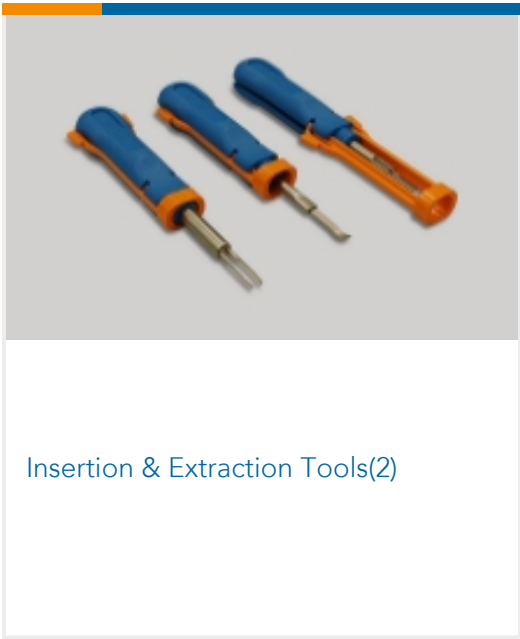

Insertion & Extraction Tools(2)

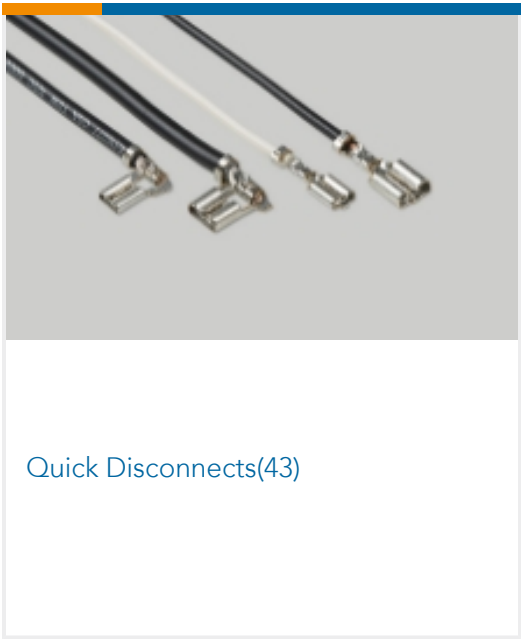

Quick Disconnects(43)

Customers Also Bought



TE Part # HD18-003
BACK SHELL



TE Part # 520963-2
ULTRA POD: Straight, Receptacle
Assembly, Tin Plated, 0.25 inch




TE Part # 41711
RING TERMINAL 22-18 AWG TPBR




TE Part # 62613-2
RING .190 12-10 AWG 0245 TPCRS



TE Part # HDB36-18-14SN-059
BR AWY PL ASM,MC

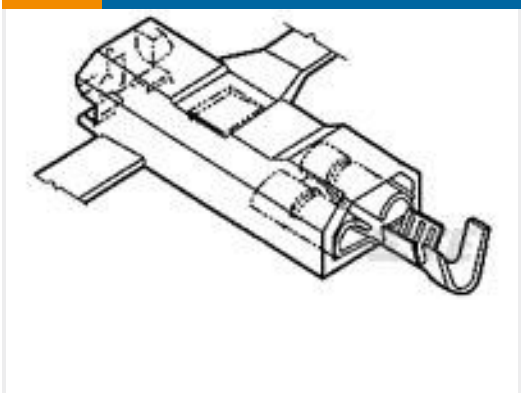

TE Part # 521437-2
ULTRA-POD 110 ASSY REC 22-18
AWG TPBR

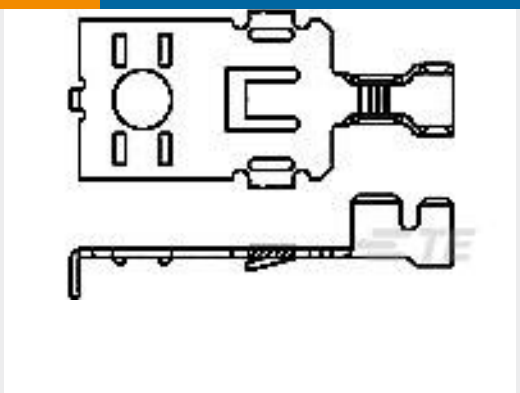

TE Part # 63166-4
POWER RING,TERMINAL 16-12 AWG
BR



TE Part # 1969870-1
3P, 250 AND 187 SRS, POSI-LOCK
MARK II



TE Part # 520935-9
PL&STANDARD FASTON 250
HOUSING REC BLA

Documents

Product Drawings

ULTRA-POD 250 ASSY TAB 18-14 AWG TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_521217-2_H.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_521217-2_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_521217-2_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



Ultra-Fast and Ultra Fast Plus

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English

UL Report

English