

4-794633-0  ACTIVE

MATE-N-LOK | Micro MATE-N-LOK


TE Internal #: 4-794633-0

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 10 Position, 3 mm [.118 in] Centerline, Printed Circuit Board, UL 94V-0, Micro MATE-N-LOK

[View on TE.com >](#)



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

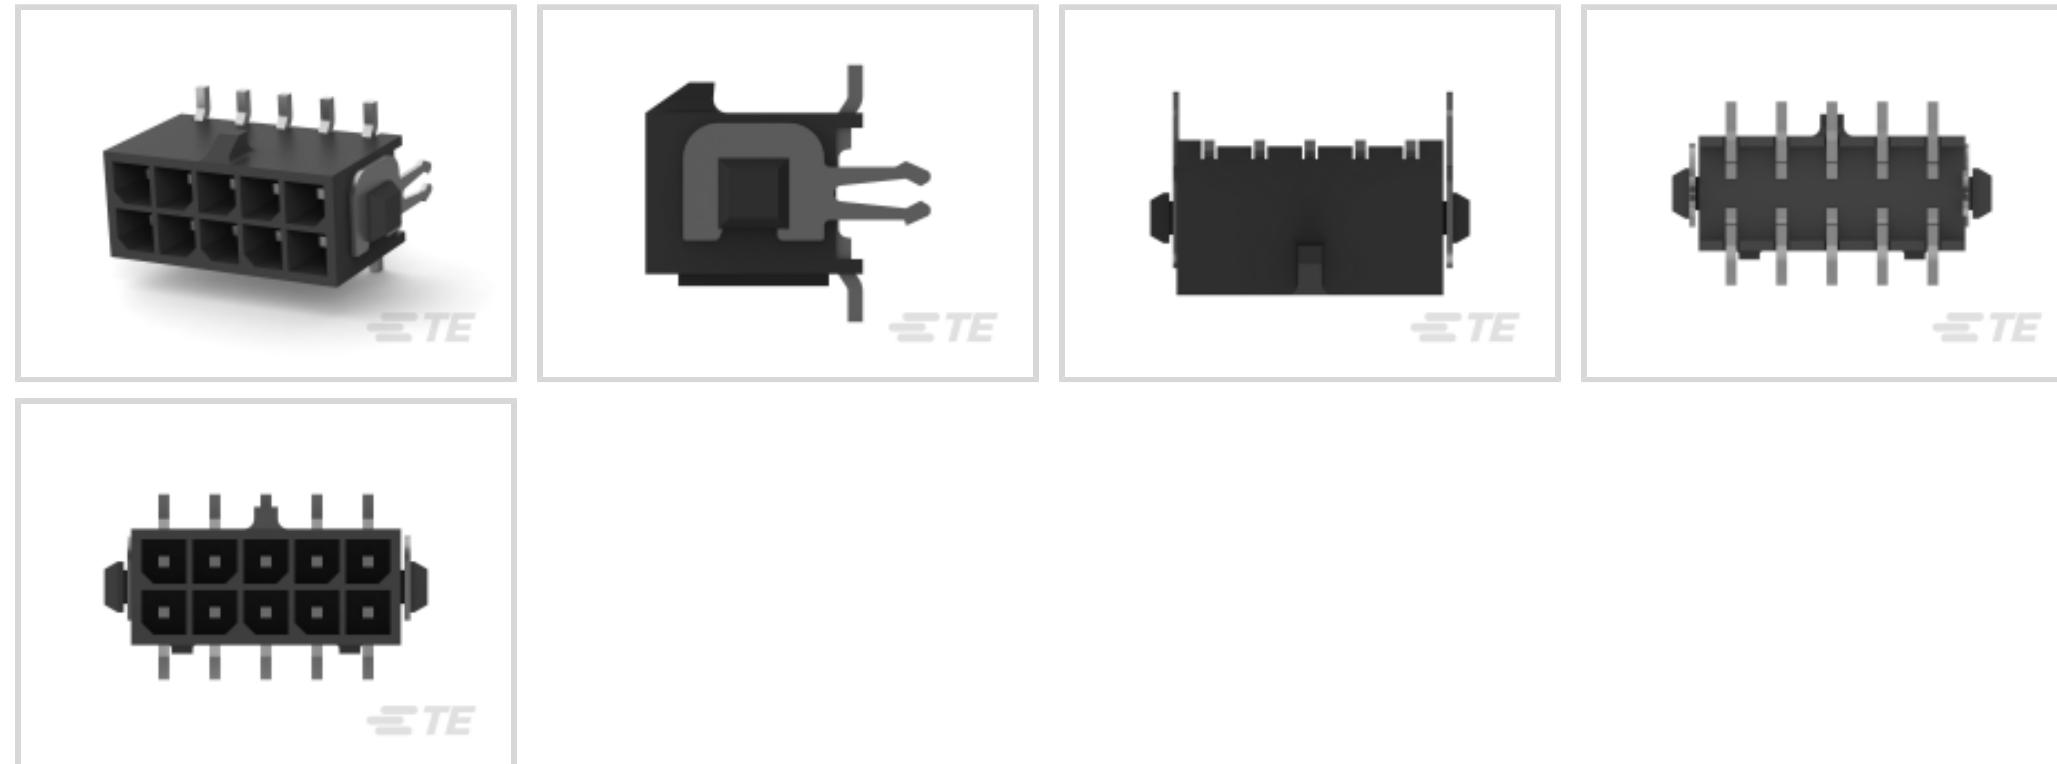

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **10**

Centerline (Pitch): **3 mm [.118 in]**

Features

Product Type Features

Header Type	Fully Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	10
PCB Mount Orientation	Vertical
Number of Power Positions	10
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Contact Features

Multiple Contact Types	Without
PCB Contact Termination Area Plating Material Thickness	3.81 μm [150 μin]
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	5 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.54 - 7.62 μm [100 - 300 μin]

Termination Features

Termination Post & Tail Length	3.43 mm [.135 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount

Housing Features

PCB Mount Retention Material	Phosphor Bronze
Centerline (Pitch)	3 mm [.118 in]
Housing Color	Black
Housing Material	High Temperature Nylon

Dimensions

Compatible Insulation Diameter (Max)	1.52 mm
PCB Thickness (Recommended)	1.6 mm [.063 in]
Product Width	9.24 mm
Product Length	19 mm
Wire Size	.051 - .517 mm ²

Row-to-Row Spacing 3 mm [.118 in]

Usage Conditions

Operating Temperature Range -40 - 105 °C [-40 - 221 °F]

Operation/Application

Circuit Application Power

Industry Standards

CSA Rating Certified, LR 7189

UL Rating Recognized

Compatible With Agency/Standards Products CSA, UL, VDE

Compatible With Approved Standards Products UL E28476

UL Flammability Rating UL 94V-0

Glow Wire Rating Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity 175

Packaging Method Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU Compliant

EU ELV Directive 2000/53/EC Compliant

China RoHS 2 Directive MIIT Order No 32, 2016 No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JAN 2024 (240)
Candidate List Declared Against: JAN 2024 (240)
Does not contain REACH SVHC

Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 1-794617-0
10POS,MICRO MNL,RCPT HSG




TE Part # 4-2315124-0
10P MICRO MNL ASSY,VRT,SMT,LF

Also in the Series

Micro MATE-N-LOK

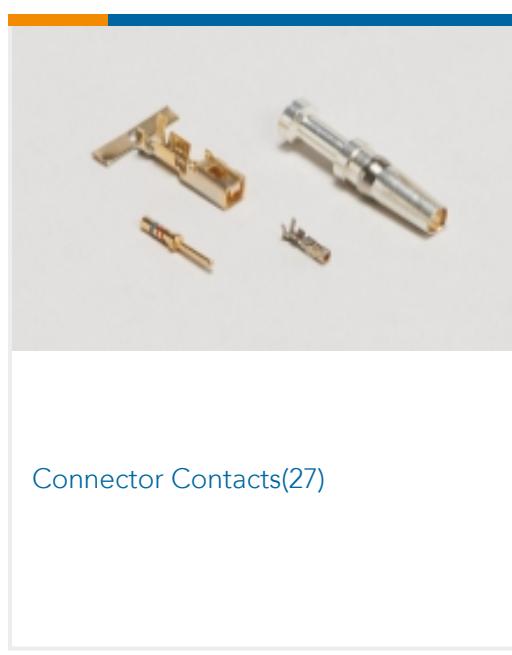

Connector Contacts(27)

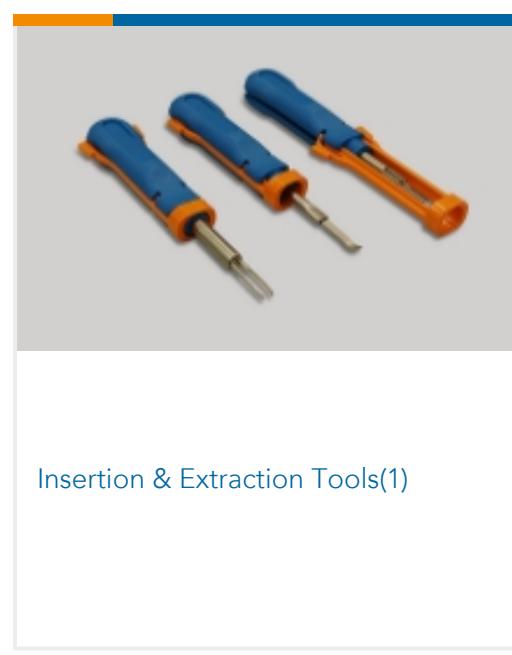

Insertion & Extraction Tools(1)



Rectangular Power Connectors(469)

Customers Also Bought



TE Part # 5-5179180-2
0.8FH,R09H.5,060,08/Sn,TR,SC



TE Part # 3-5177986-2
0.8FH,P08H.5,060,08/Sn,TR,SC



TE Part # 1571983-5
GDH04STR04=DIP SWITCH



TE Part # 5-104363-3
04 MTE HDR SRST LATCH .100CL



TE Part # 1-406541-1
MJ,INV,1X1,6PNL G,.100"ST,SN



TE Part # 2-1445052-6
MICRO MNL HDR ASSY S/ROW LF



TE Part # 4-794633-4
14P MICRO MNL ASSY,VRT,SMT,LF



TE Part # 5-794633-0
20P MICRO MNL ASSY,VRT,SMT,LF



TE Part # 5-794633-4
24P MICRO MNL ASSY, VRT, SMT, LF

Documents

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_4-794633-0_K.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-794633-0_K.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-794633-0_K.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

[MICRO MATE-N-LOK CONNECTOR SYSTEM](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[VDE Certificate](#)

English