




Terminals & Splices > Magnet Wire Terminals

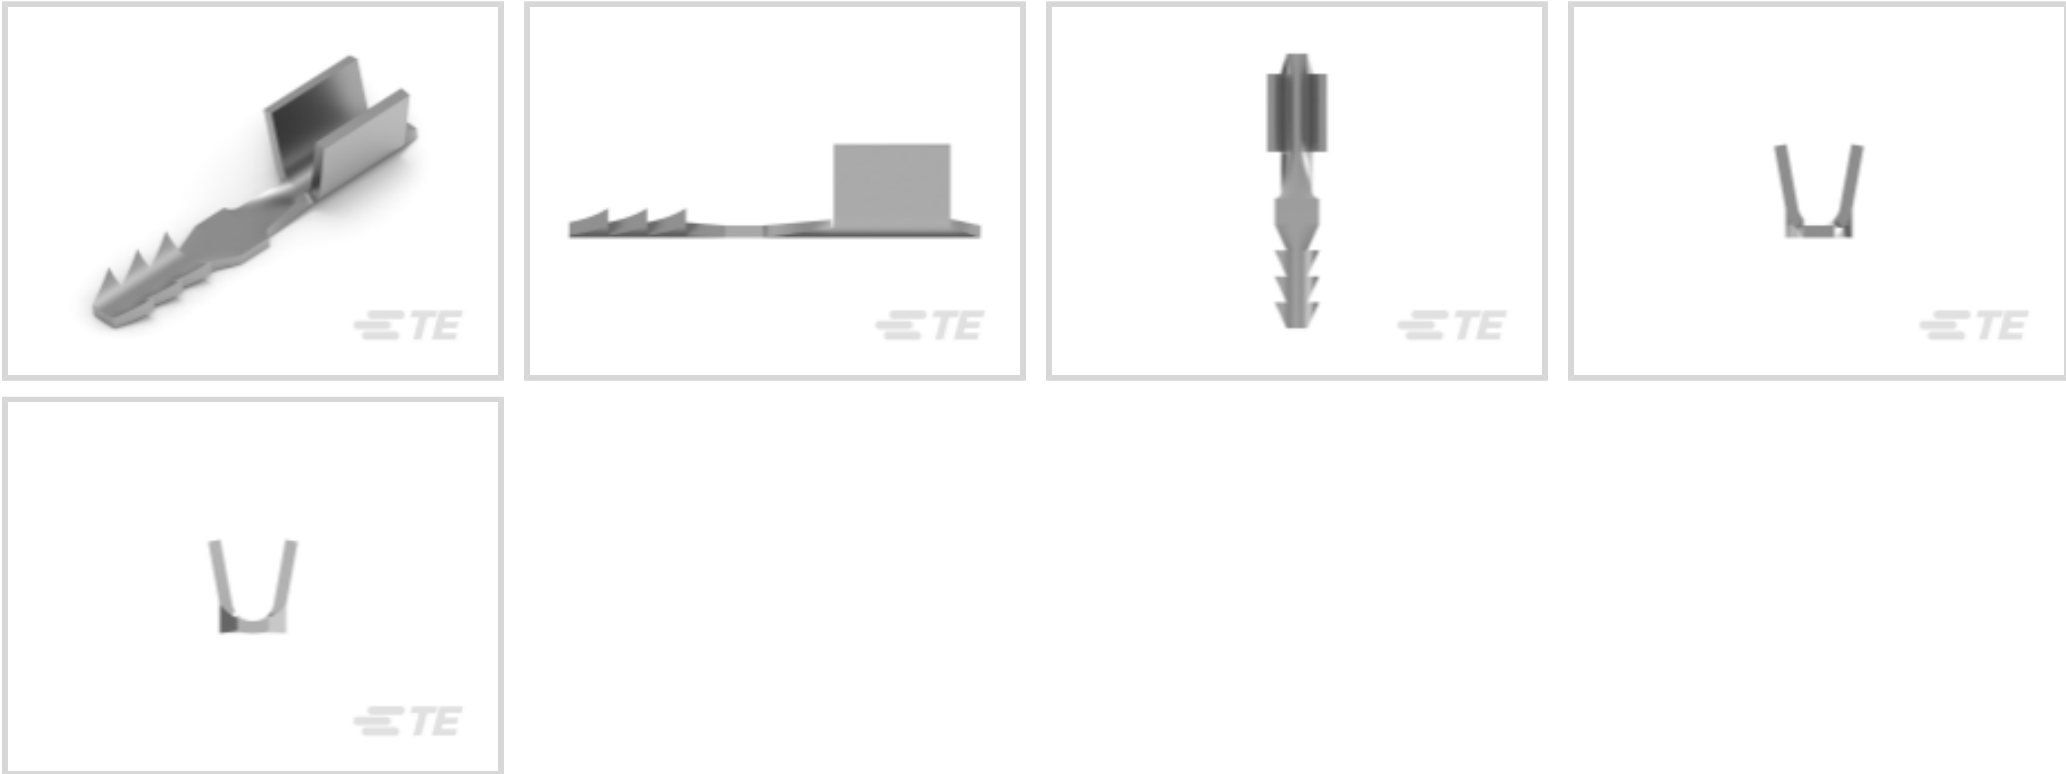

Magnet Wire Terminal Type: **Tab**

Magnet Wire Size: **.03 - .32 mm**

Termination Method to Wire & Cable: **Crimp**

Crimp Area Length: **3.81 mm [.15 in]**

Features

Product Type Features

Compatible With Discrete Wire Type	Magnet Wire, Solid
------------------------------------	--------------------

Contact Features

Magnet Wire Terminal Type	Tab
Terminal Plating Material	Tin
Terminal Orientation	Straight

Termination Features

Termination Method to Wire & Cable	Crimp
Crimp Area Length	3.81 mm[.15 in]

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Terminal Height	12.45 mm[.49 in]
Magnet Wire Size	.03 - .32 mm
Stock Thickness (Magnet Wire Side)	.39 mm[.016 in]



Product Length	12.45 mm[.49 in]
----------------	------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operation/Application

Compatible With Wire Base Material	Aluminum, Copper
------------------------------------	------------------

Packaging Features

Packaging Method	Reel
------------------	------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 63481-2
RCPT STATOR 21-15 0173PTPBR



TE Part # 1494212-1
SIZE(2.8) AMPLIVAR FASTON RECP



TE Part # 1494211-1
SIZE(2.8) AMPLIVAR FASTON RECP



TE Part # 1814988-1
.250SERIES FASTIN-FASTON TAB AMPLIVAR



TE Part # 1742451-1
AMPLIVAR WIRE PIN 600-1400 020BRS



TE Part # 1494212-2
SIZE(2.8) AMPLIVAR FASTON RECP



TE Part # 1742685-1
FASTON 187 TERMINAL-FLAG REC 18 AWG TPBR

Also in the Series | **AMPLIVAR**



Crimp Wire Pins, Tabs & Ferrules(5)




Magnet Wire Terminals(4)



PCB Terminals(1)



Quick Disconnects(40)

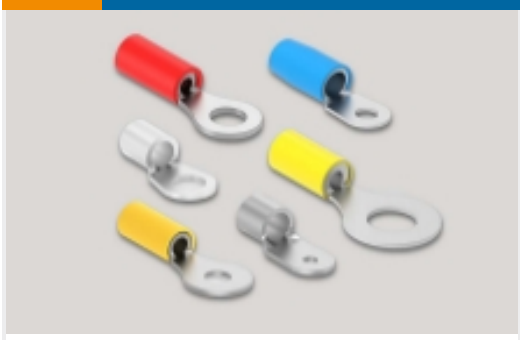

Ring Terminals(28)



Splices(77)

Customers Also Bought



TE Part # DTM04-6P-EE04
REC, 6P, BLK, N, HIGH TEMP



TE Part # 33469
TERMINAL,SOLIS R 4 1/4



TE Part # 350810-1
05P UMNL CAP HSG



TE Part # 41711
RING TERMINAL 22-18 AWG TPBR



TE Part # 2-520102-2
ULTRA-FAST 250 ASSEMBLY TAB 22-18 AWG BR

TE Part # 42490-3
187 FASTON TAB 22-18 AWG TPBR

TE Part # 1-640250-5
15P SL156 HSG W/LCK RAMP NATL

TE Part # 1060-20-0222
PIN, SF, SIZE 20, 16-22, NI/NI

TE Part # 2-521010-2
ULTRA-FAST .110/.125 ASY REC 22-18 TPBR

Documents

Product Drawings

BOBBIN TAB .016TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_62192-1_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_62192-1_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_62192-1_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

AMPLIVAR Stator Receptacles with FASTON Mating End

English