



Connectors > Contacts > Connector Contacts



Contact Type: **Tab**
Contact Mating Area Plating Material: **Tin**
Wire Size: **.2 - .5 mm²**
Product Terminates To: **Wire & Cable**

Features

Contact Features

Contact Type	Tab
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	6 A

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Dimensions

Wire Size	.2 - .5 mm ²
-----------	-------------------------

Usage Conditions

Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Method	Reel
------------------	------

Product Compliance



For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1718044-2
RAST2.5 W2W Crimp-IDC 2pos Motor Mnt

TE Part # 1718044-4
RAST2.5 W2W Crimp-IDC 2pos Motor Mnt

TE Part # 1718044-1
RAST2.5 W2W Crimp-IDC 2pos Motor Mnt

TE Part # 2266778-2
OC-AT-S-FA-070F118F-001-0244

TE Part # 293230-1
RAST2.5 W2W Crimp-IDC 4pos Motor Mnt

TE Part # 293230-4
RAST2.5 W2W Crimp-IDC 4pos Motor Mnt

TE Part # 7-2266778-7
OC-070F118F-CRIMPTOOLINGKIT

TE Part # 1718044-3
RAST2.5 W2W Crimp-IDC 2pos Motor Mnt



Customers Also Bought



TE Part # DT04-2P
REC, 2P, GRY, N



TE Part # W2S
Wedgelocks: DEUTSCH DT




TE Part # 0460-202-16141
DEUTSCH Solid Contacts



TE Part # 282104-1
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING



TE Part # DT06-2S
PLG, 2P, GRY, N

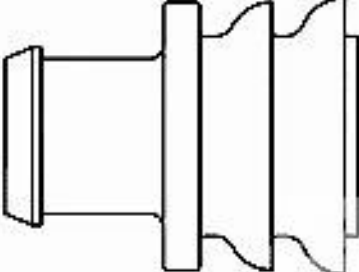

TE Part # 281934-2
SINGLE WIRE SEAL



TE Part # 114017-ZZ
SEALING PLUG, SIZE 12/16, WHT

Documents

Product Drawings
CRIMPED TAB CONTACT, P.C.B. INTERFACE
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1955441-1_A.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_1955441-1_A.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1955441-1_A.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages
RAST Connector System Catalog
English

Product Specifications
Application Specification
English

1955441-1

Tab Contact, Tin, 22 - 24 AWG Wire Size, .2 - .5 mm² Wire Size, Power & Signal, -40 - 230 °F [-40 - 110 °C]

