

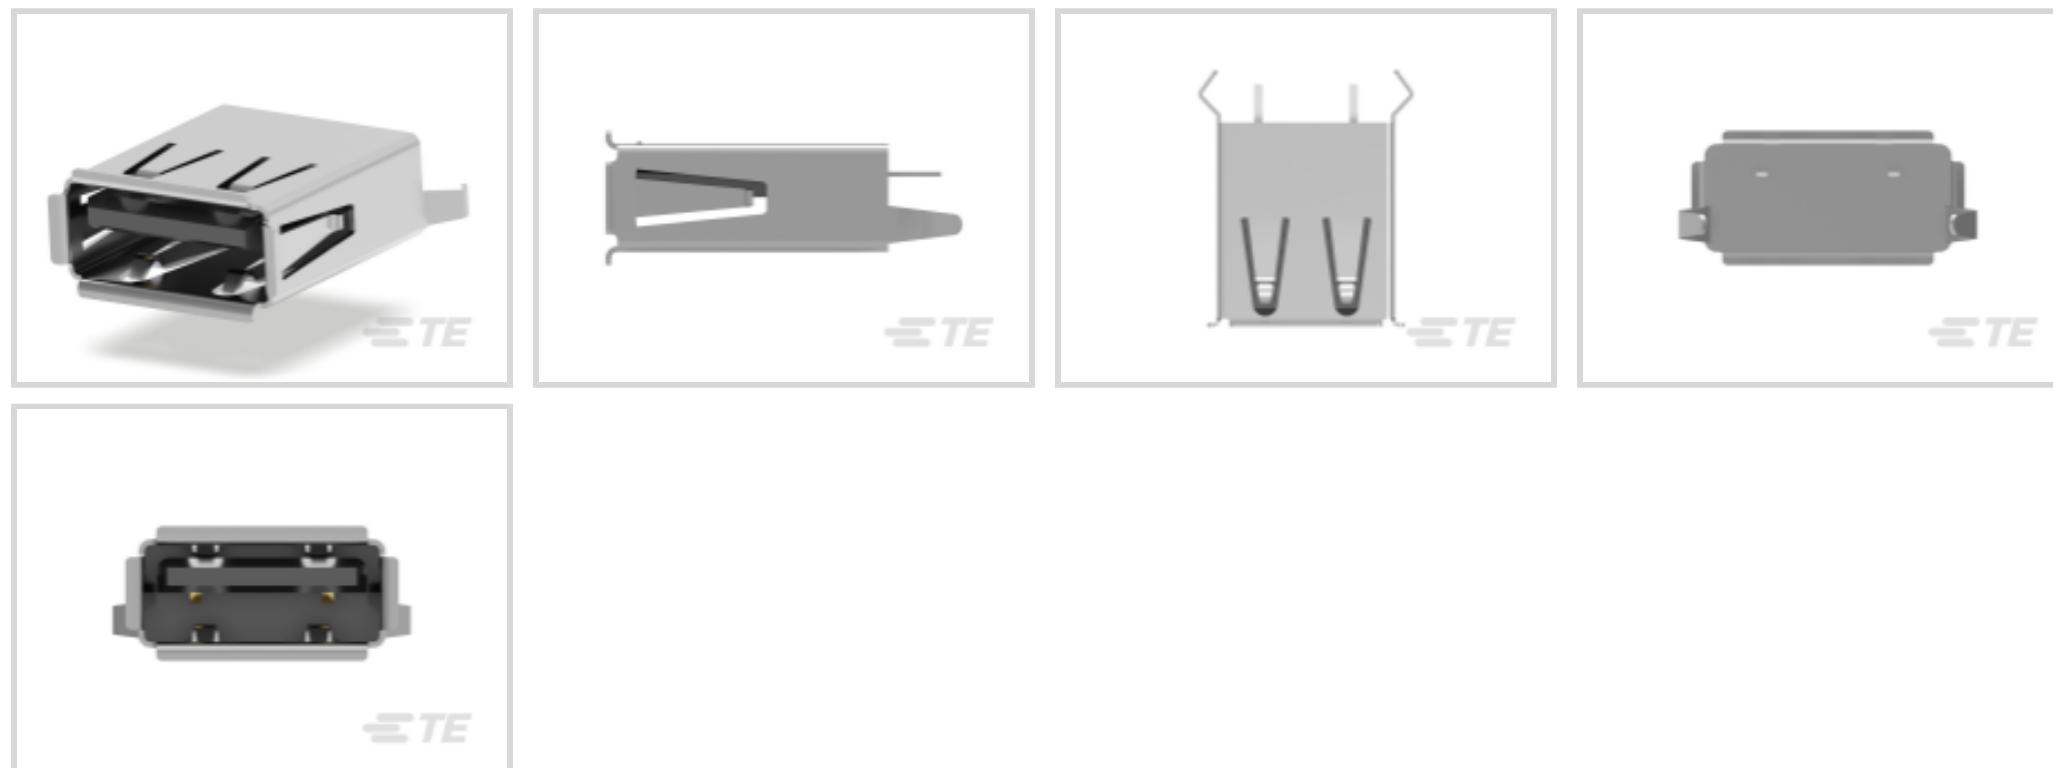
1734366-3  ACTIVE

TE Internal #: 1734366-3

USB Connectors, A, 2.0, Standard Profile, Receptacle, 1 Port, Top, Vertical, Tray / Box & Tray, Flush, Through Hole - Solder, Cable-to-Board, Flange

[View on TE.com >](#)

Connectors > Audio & Video Connectors > USB Connectors



USB Adapter Type: A

USB Version: 2.0

Connector Profile: Standard

Connector & Housing Type: Receptacle

Number of Ports: 1

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| USB Adapter Type | A |
| USB Version | 2.0 |
| Connector & Housing Type | Receptacle |
| Connector System | Cable-to-Board |
| Connector & Contact Terminates To | Printed Circuit Board |
| USB Connector Type | USB 2.0 Type-A |

Configuration Features

| | |
|-------------------------|---|
| Number of Mounting Legs | 2 |
| Number of Ports | 1 |
| Number of Positions | 4 |

Body Features

| | |
|------------------------|----------|
| Shell Plating Finish | Bright |
| Shell Plating Material | Tin |
| Connector Profile | Standard |

Contact Features

| | |
|--|---|
| Contact Mating Area Plating Material Thickness | .76 μm [29.92 μin] |
| Contact Mating Area Plating Material | Gold Flash over Palladium Nickel |
| Contact Current Rating (Max) | 1 A |

Termination Features

| | |
|---|-----------------------|
| Termination Post & Tail Length | 2.8 mm[.11 in] |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| | |
|--------------------------|-------------|
| Locking Feature | Without |
| PCB Mount Location | Top |
| PCB Connector Seating | Flush |
| PCB Mount Retention Type | Kinked Legs |
| Panel Mount Feature Type | Flange |
| Connector Mounting Type | Board Mount |

Housing Features

| | |
|--------------------|--------------------------------|
| Housing Material | Thermoplastic |
| Housing Color | Blue |
| Body Orientation | Vertical |
| Centerline (Pitch) | 2 mm, 2.5 mm[.078 in][.098 in] |

Dimensions

| | |
|-----------------------------|-----------------|
| PCB Thickness (Recommended) | 1.6 mm[.063 in] |
|-----------------------------|-----------------|

Usage Conditions

| | |
|-----------------------------|---------------------------|
| Soldering Temperature (Max) | 240 °C[464 °F] |
| Mating Cycles (Max) | 1500 |
| Operating Temperature Range | -40 - 80 °C[-40 - 176 °F] |

Operation/Application

| | |
|---------------------|----------------|
| Halogen Free | No |
| Circuit Application | Power & Signal |

Industry Standards

| | |
|----------------------------|----------|
| Moisture Sensitivity Level | 1 |
| Industry Standard | USB 2.0 |
| UL Flammability Rating | UL 94V-0 |

Packaging Features

| | |
|--------------------|------------------|
| Packaging Quantity | 1200 |
| Packaging Method | Box & Tray, Tray |

Product Compliance

For compliance documentation, visit the product page on TE.com>

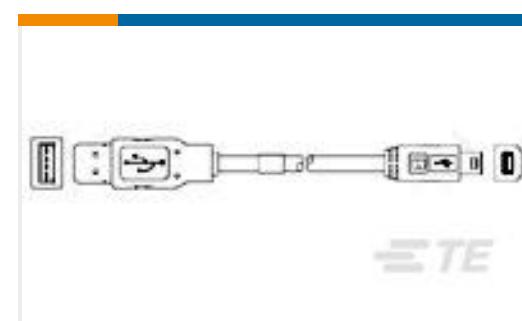
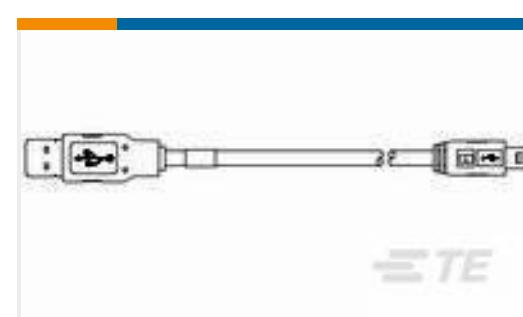
| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Wave solder capable to 265°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

| | | | |
|---|--|--|---|
|  TE Part # 1827525-1 MECHATROLINK II CONNECTOR KIT |  TE Part # 1-1734028-1 Std USB, Type A, Plug, Natural |  TE Part # 1487599-1 USB, A-BLUNT,28/28,BLK,0.83M |  TE Part # 1734028-1 Std USB Type A, Plug, Natural |
|---|--|--|---|

TE Part # 1487593-1
USB, A-BLUNT,28/24,WHT,2.0MTE Part # 1-1734028-3
Std USB, Type A, PlugTE Part # 1496476-1
STD USB-A TO MINI-B ASSY, 1MTE Part # 1487600-1
USB, A-BLUNT,28/26,BLK,1.0MTE Part # 1487591-1
USB, A-BLUNT,28/28,WHT,0.83MTE Part # 1929690-1
USB CABLE, USB A to Mini USB,Blue

Customers Also Bought

TE Part # 4-1879233-4
SMW5 6R2 5%TE Part # 324471
SPLICE,AMPOWER BUTT 1000MCMTE Part # 2176057-6
RLP73V 3A R016 1% 1K RLTE Part # 1-1761465-2
PCI Express RA assy 5.8mm slot 2.3 mm pcTE Part # ANT-ELE-S01-005
Antenna Whip 860-960MHz MagBase-MntTE Part # ANT-MAG-B50-SMA
Antenna Magnetic Base 50mm RG174 4M SMATE Part # 327294
TERMINAL,AMPOWER 1000MCM 1/2

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1734366-3_C1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1734366-3_C1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1734366-3_C1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English

[Product Specification](#)

English