



Connectors > Contacts > Connector Contacts



Contact Type: **Socket**
Contact Mating Area Plating Material: **Gold**
Wire Contact Termination Area Plating Material: **Tin**
Contact Retention Within Housing: **With**
Contact Retention Type Within Housing: **Locking Lance**

Features

Contact Features

PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Type	Socket
Contact Mating Area Plating Material	Gold
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	5 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
---------------------------------------	---------------

Dimensions



Compatible Insulation Diameter Range	1.22 - 1.52 mm[.048 - .06 in]
Wire Size	404 - 1020 CMA

Usage Conditions

Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Contact Color Code	Green
--------------------	-------

Packaging Features

Packaging Quantity	7000
Packaging Method	Strip

Product Compliance

For compliance documentation, visit the product page on TE.com>

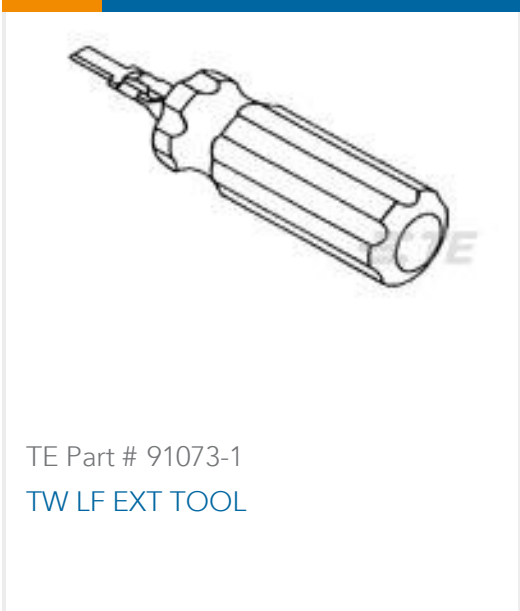
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



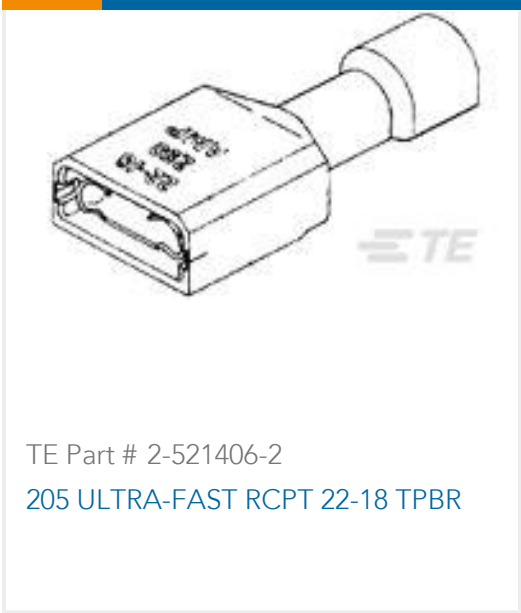
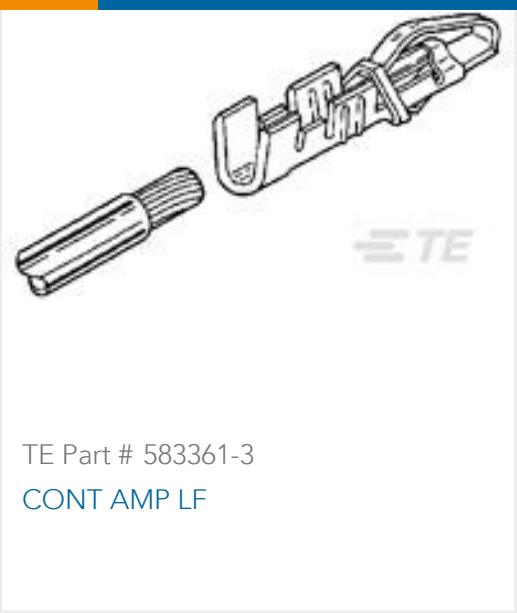
Compatible Parts

 TE Part # 91073-1 TW LF EXT TOOL	 TE Part # 2151985-1 OCEAN_2.0_APPLICATOR-S-055F062O-RSM	 TE Part # 2151985-2 OCEAN_2.0_APPLICATOR-S-055F062O-RSA	 TE Part # 7-2151985-7 OCEAN_2.0_SPARE_PART_KIT-055F062O
 TE Part # 91535-1 CCII TWIN LEAF 24-20 ASSY	 TE Part # 7-2151985-1 OCEAN_2.0_APPLICATOR-S-055F062O	 TE Part # 7-2151985-2 OCEAN_2.0_APPLICATOR-S-055F062OA	

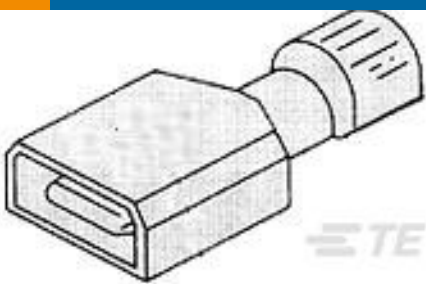
Also in the Series | AMP Twin-Leaf

 Connector Contacts(15)	 Insertion & Extraction Tools(1)	 Wire-to-Board Connector Assemblies & Housings(17)
---	---	--

Customers Also Bought

 TE Part # 770070-1 03P .093 COMM P&S RECPT HSG	 TE Part # 2-521406-2 205 ULTRA-FAST RCPT 22-18 TPBR	 TE Part # 770074-1 03P .093 COMM P&S PLUG HSG	 TE Part # 583361-3 CONT AMP LF
---	---	--	---





TE Part # 2-521144-2
ULTRA-FAST 250 ASY TAB 22-18 TPBR



TE Part # 2-604771-0
CABLE TIE, BLACK, 4" (1000)



TE Part # 1-104257-9
20 MTE RCPT HSG SR LATCH .100



TE Part # 104480-9
SHORT POINT RECP CONT LP

TE Part # GASSD-004
PRO2-PROBE AD590

Documents

Product Drawings

TWIN LEAF TERM. STRIP CSTL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-583853-3_BR.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-583853-3_BR.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-583853-3_BR.3d_stp.zip

English

Customer View Model

ENG_CVM_5-583853-3_V1.3d_igs.zip

English

3D PDF

English

Customer View Model

ENG_CVM_5-583853-3_V1.2d_dxf.zip

English

Customer View Model

ENG_CVM_5-583853-3_V1.3d_stp.zip

English

5-583853-3

Socket Contact, Gold, Locking Lance Contact Retention, 24 - 20 AWG Wire Size, .2 - .6 mm² Wire Size, 404 - 1020 CMA Wire Size, Crimp, AMP Twin-Leaf



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English