




Terminals & Splices > Automotive Terminals > AMP SUPERSEAL 1.5MM, RECEPTACLE AND TAB

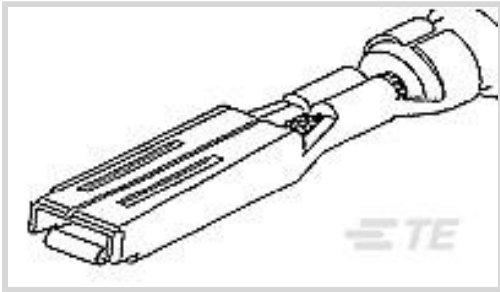

Terminal Type: **Receptacle**
Mating Tab Width: **1.5 mm [.059 in]**
Mating Tab Thickness: **.8 mm [.031 in]**
Terminal Transmits: **0 - 24 A (Low Power)**
Wire Size: **22 - 20 AWG**

All AMP SUPERSEAL 1.5MM, RECEPTACLE AND TAB (16)

Features

Product Type Features

Receptacle Style	180°
Sealable	Yes
Primary Locking Feature	Locking Lance

Body Features

Terminal Seal Type	Single Wire Seal (SWS)
--------------------	------------------------

Contact Features

Contact Size	1.5mm
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Typical Current Rating	6 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	1.5 mm[.059 in]
Mating Tab Thickness	.8 mm[.031 in]
Interface Plating	Tin (Sn)

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------



Product Terminates To	Wire
Dimensions	
Compatible Insulation Diameter Range	1.2 - 1.6 mm[.047 - .063 in]
Wire Size	.35 - .5 mm²
Wire Size Search	20 AWG, 21 AWG, 22 AWG
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Compatible With Agency/Standards Products	LV214
Packaging Features	
Packaging Quantity	4000
Packaging Method	Reel
Other	
Customer Preferred Contact	No
Terminal Transmits	0 - 24 A (Low Power)
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free







Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

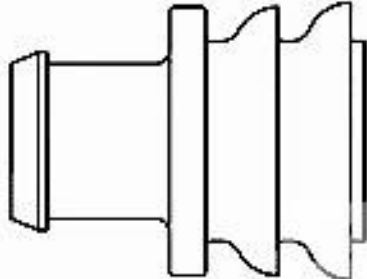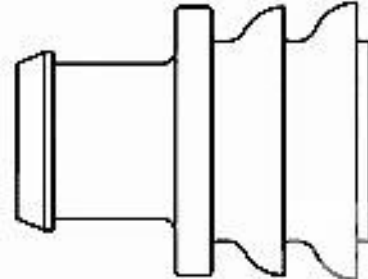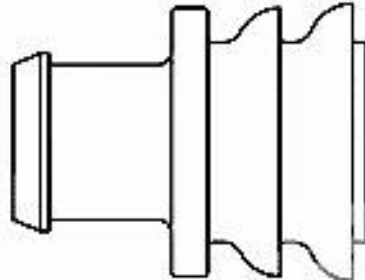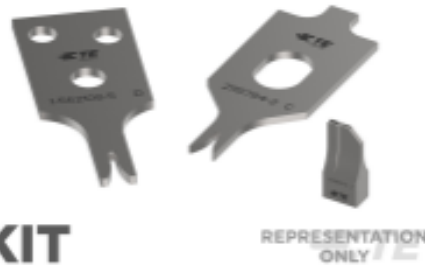 TE Part # CAT-AM71-CH8172 AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING	 TE Part # 9-1579007-1 EXTRACTION TOOL	 TE Part # 281934-3 SINGLE WIRE SEAL	 TE Part # 281934-2 SINGLE WIRE SEAL
 TE Part # 281934-4 SINGLE WIRE SEAL	 TE Part # CAT-AM71-T273 AMP SUPERSEAL 1.5MM, RECEPTACLE AND TAB	 TE Part # 2151734-1 OCEAN-2.0-APPLICATOR-S- 070F145O-RSM	 TE Part # 2151734-2 OCEAN-2.0-APPLICATOR-S- 070F145O-RSA
 TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	 TE Part # 5-2151734-1 OCEAN-2.0-APPLICATOR-S- 070F145O-RSM	 TE Part # 5-2151734-2 OCEAN-2.0-APPLICATOR-S- 070F145O-RSA	 TE Part # 7-2151734-7 OCEAN_2.0_SPARE_PART_KIT- 070F145O



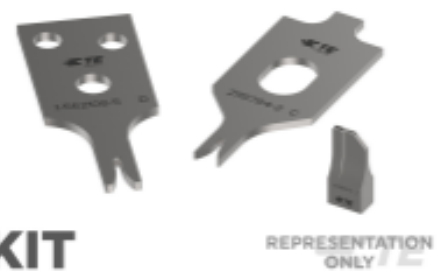

KIT

REPRESENTATION ONLY

TE Part # 7-2266249-7
OC-070F145O-752-
CRIMPTOOLINGKIT

Also in the Series | AMP Superseal 1.5mm Series



Automotive Connector Caps & Covers
(2)



Automotive Housings(36)



Automotive Terminals(17)



Connector Seals & Cavity Plugs(6)



Insertion & Extraction Tools(3)



Other Automotive Connector
Accessories(3)




PCB Headers & Receptacles(2)


Customers Also Bought



TE Part # 282105-1
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING

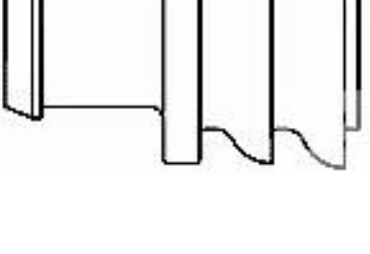

TE Part # 281934-3
SINGLE WIRE SEAL

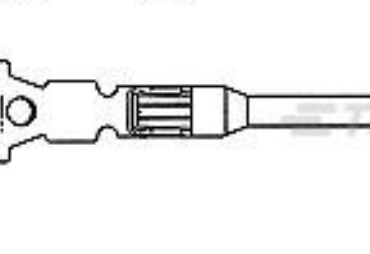

TE Part # 183036-1
MINI MIC TAB CONTACT L.P.



TE Part # 2338360-1
2P ECONOSEAL RECEPTACLE ASSY



TE Part # 9-2363287-9
48 POS MIXED REC HSG BN

TE Part # 1803945-7
TONKER



Documents

Product Drawings

MINI MIC SRS REC CONT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_282403-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_282403-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_282403-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMP SUPERSEAL 1.5mm Connector System

English

ICT Terminals and Connectors Catalogue

English

Product Specifications

Application Specification

English

Application spec. for Mini Mic etc. for single wire sealing with 5.6m. out. dia.

English

Application Specification

English

Application Specification

German

Application Specification

English

Instruction Sheets

Hand application tool P/N 785353-1

English

Instruction Sheet (non U.S.)

English