

776523-1 ✓ ACTIVE

AMP | AMPSEAL 16

TE Internal #: 776523-1

Housing for Female Terminals, Wire-to-Wire, 3 Position, .177 in [4.5 mm] Centerline, Sealable, Red, Cable Mount (Free-Hanging), AMPSEAL 16

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings



Connector System: **Wire-to-Wire**

Number of Positions: **3**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **4.5 mm [ .177 in ]**

Sealable: **Yes**

[All AMPSEAL 16 Housings \(226\)](#)

## Features

### Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing

### Configuration Features

Number of Positions	3
Number of Rows	1

### Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V

### Body Features

Cable Exit Angle	180°
Primary Product Color	Red

## Connector &amp; Keying Code

1

## Contact Features

Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.5 mm [.059 in]
Contact Current Rating (Max)	13 A

## Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

## Housing Features

Housing Material	PBT GF
Centerline (Pitch)	4.5 mm [.177 in]

## Dimensions

Connector Height	23.5 mm [.925 in]
Product Width	36.8 mm [1.449 in]
Product Length	24.83 mm [.978 in]

## Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C [158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 - 125 °C [-40 - 257 °F]

## Industry Standards

Degree of Protection	IP67
UL Flammability Rating	UL 94HB

## Packaging Features

Packaging Quantity	22
Packaging Method	Package

## Other

Serviceable	Yes
-------------	-----

Connector Position Assurance Capable Yes

## Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts

			
TE Part # CAT-AM7801-CH8172 AMPSEAL 16 Housings	TE Part # CAT-AM7801-B128 AMPSEAL 16 Connectors Backshell	TE Part # 776364-1 SEALING PLUG, SZ 20 CAVITY	TE Part # CAT-AM7801-T273 AMPSEAL 16 CONTACTS


TE Part # CAT-AM7801-T618  
Removal Tools - AMPSEAL 16TE Part # 2203728-1  
AS16; 2p Wire Seal; Reduced DiameterTE Part # 2272179-2  
AMPSEAL 16 PERIPHERAL SEAL 3P - SERVICE

## Also in the Series


## AMPSEAL 16

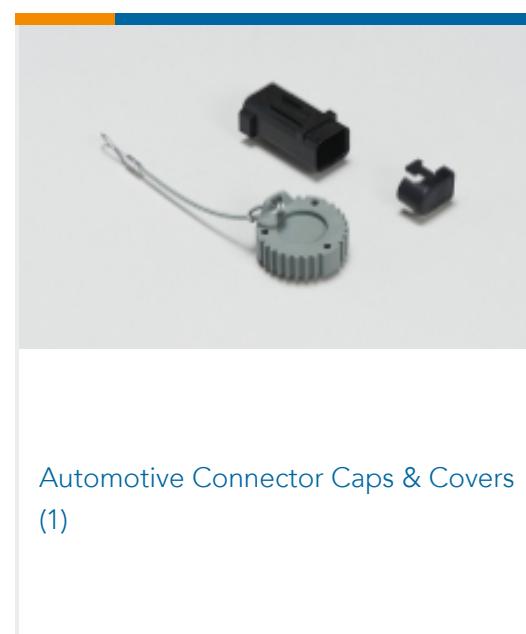


Automotive Connector Caps &amp; Covers (1)

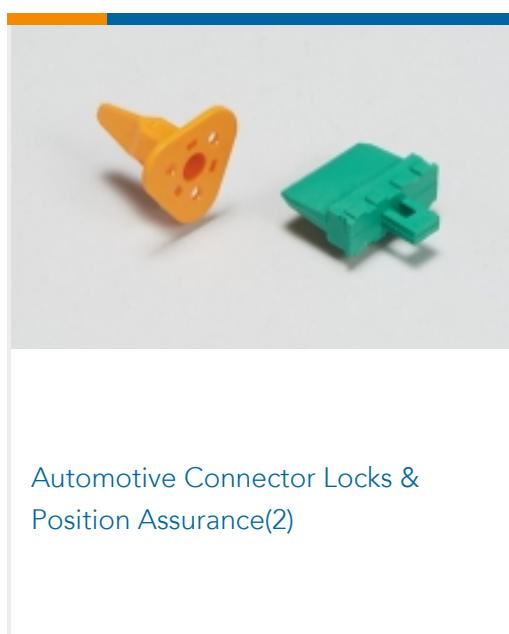


Automotive Connector Locks &amp; Position Assurance(2)

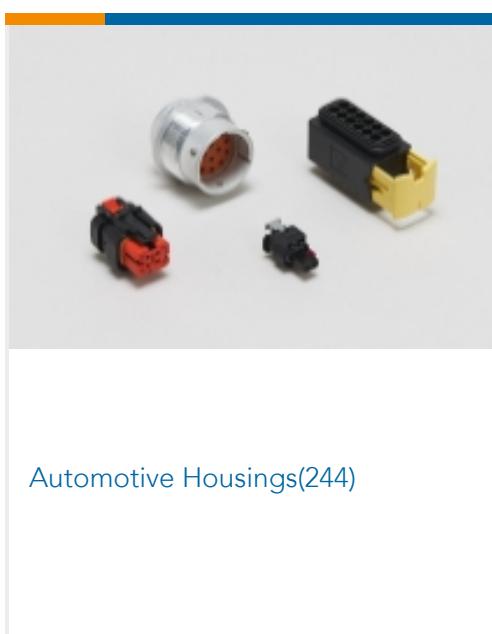


Automotive Housings(244)

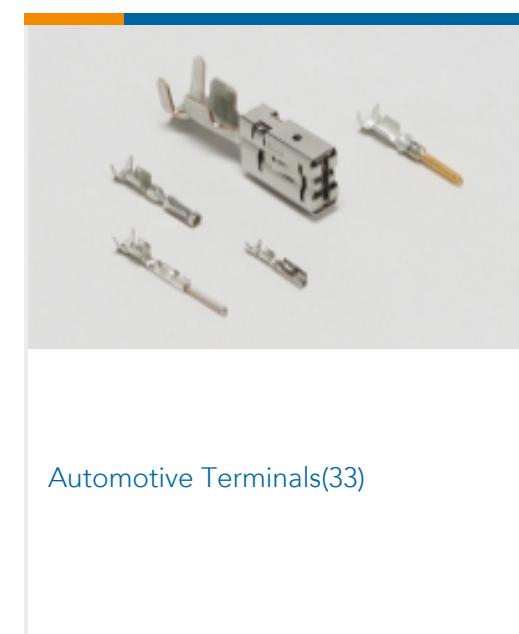


Automotive Terminals(33)

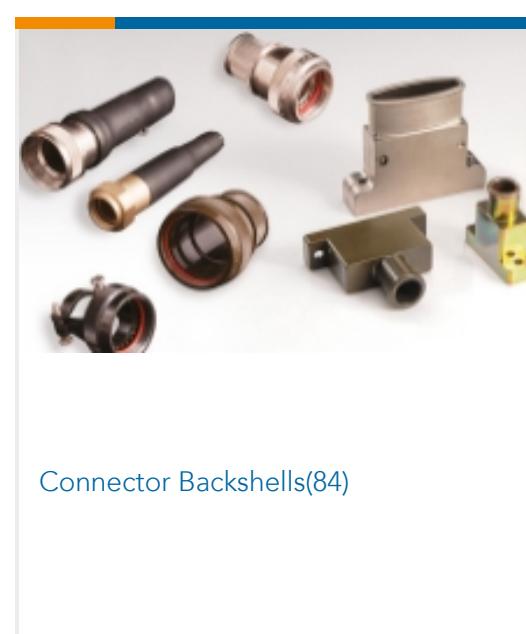

Connector Backshells(84)

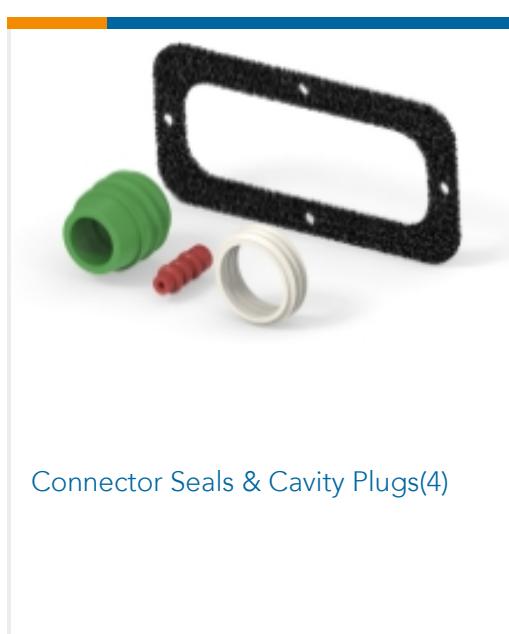


Connector Seals &amp; Cavity Plugs(4)

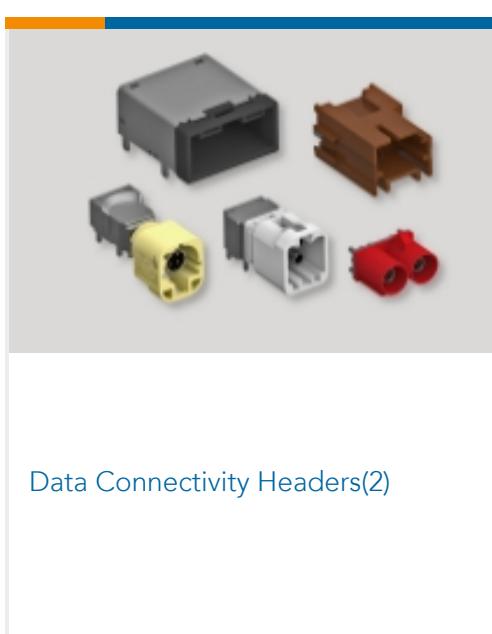

Data Connectivity Headers(2)



Data Connectivity Housings(3)

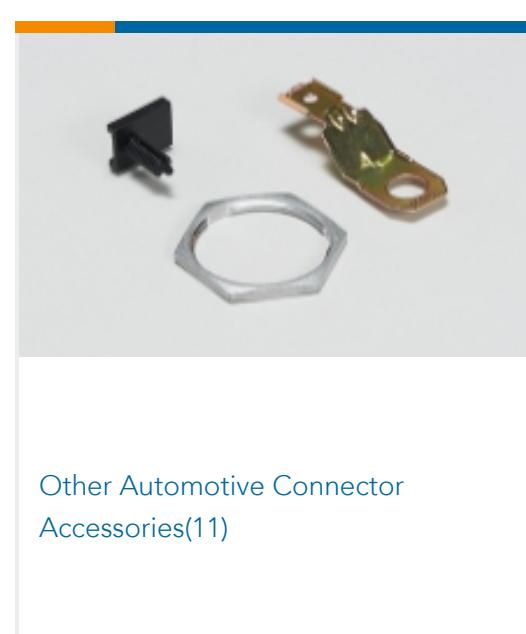

Other Automotive Connector Accessories(11)

## Customers Also Bought

TE Part # 776531-2  
AMPSEAL 16 HousingsTE Part # 2098251-1  
SOC, SF, SIZE 16, 16-18 AWG, AU/SNTE Part # 3-2112162-1  
21POS,TAB2.8X0.8,TABHSG,CODE C,  
ASSY,SLDTE Part # 2035366-3  
Backshell,AS16,2P,90Deg,NC12,LP,  
Plug



TE Part # HDP24-18-14PE-L015  
REC, 14P, BLK, E, THD, 16, P

## Documents

### Product Drawings

[AS 16, 3P PLUG ASSY, RD, KEY 1](#)

English

---

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_776523-1\\_E\\_c-776523-1-e.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_776523-1\\_E\\_c-776523-1-e.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_776523-1\\_E\\_c-776523-1-e.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

---

### Product Specifications

[Application Specification](#)

English

---

### Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English