




Connectors > Terminal Blocks & Strips > Barrier Strips

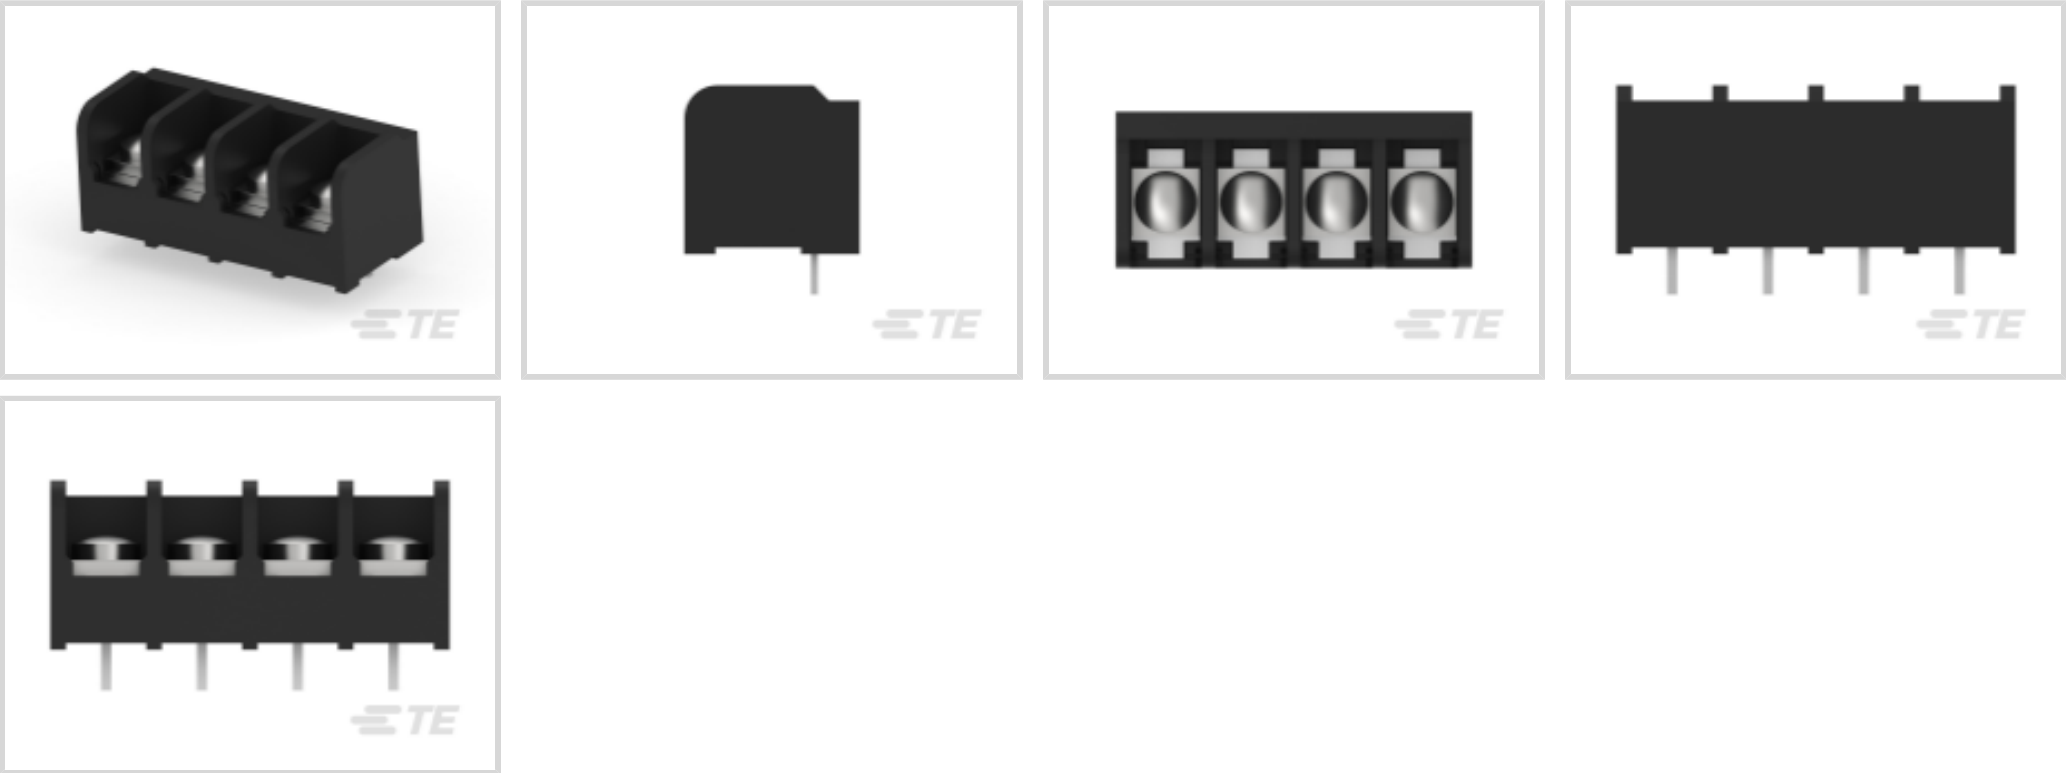

Barrier Strip Style: **Tri-Barrier**  
Bottom Termination Type: **Printed Circuit Pin**  
Connector System: **Wire-to-Board**  
Number of Positions: **4**  
Centerline (Pitch): **11.1 mm [.438 in]**

Features

Product Type Features

|                                   |                            |
|-----------------------------------|----------------------------|
| Block Style                       | Flat Bottom with standoffs |
| Connector System                  | Wire-to-Board              |
| Connector & Contact Terminates To | Printed Circuit Board      |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Levels    | 1 |
| Number of Positions | 4 |
| Number of Rows      | 1 |

Electrical Characteristics

|                   |       |
|-------------------|-------|
| Operating Voltage | 600 V |
|-------------------|-------|

Body Features

|                       |             |
|-----------------------|-------------|
| Primary Product Color | Black       |
| Product Orientation   | Vertical    |
| Barrier Strip Style   | Tri-Barrier |

Contact Features

|  |  |
|--|--|
|  |  |
|--|--|



|                                               |              |
|-----------------------------------------------|--------------|
| PCB Contact Termination Area Plating Material | Tin          |
| Contact Base Material                         | Copper Alloy |
| Contact Current Rating (Max)                  | 30 A         |

Termination Features

|                         |                     |
|-------------------------|---------------------|
| Bottom Termination Type | Printed Circuit Pin |
|-------------------------|---------------------|

Mechanical Attachment

|                         |                       |
|-------------------------|-----------------------|
| Screw Head Type         | Wire Clamp Combo Head |
| Screw Plating Material  | Zinc                  |
| Screw Material          | Steel                 |
| Top Termination Type    | Wire Clamp Combo Head |
| Mounting Options        | None                  |
| Thread Size             | 8-32                  |
| Connector Mounting Type | Board Mount           |

Housing Features

|                    |                   |
|--------------------|-------------------|
| Housing Material   | Thermoplastic     |
| Centerline (Pitch) | 11.1 mm [.438 in] |

Dimensions

|                |                             |
|----------------|-----------------------------|
| Product Length | 46.28 mm [1.822 in]         |
| Wire Size      | .326 - 5.26 mm <sup>2</sup> |

Usage Conditions

|                             |                             |
|-----------------------------|-----------------------------|
| Operating Temperature Range | -40 - 120 °C [-40 - 248 °F] |
|-----------------------------|-----------------------------|

Operation/Application

|                     |       |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |        |
|--------------------|--------|
| Packaging Quantity | 150    |
| Packaging Method   | Carton |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                              |           |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
|------------------------------|-----------|




|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2024 (240)<br>Candidate List Declared Against: JAN 2024 (240)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                  |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

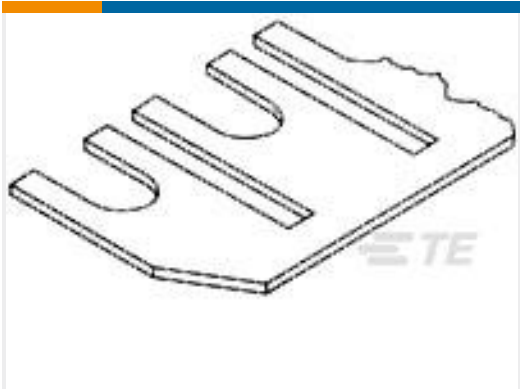

TE Part # 5-1437644-4  
J8-2=J8-XX JUMPER

Also in the Series | Buchanan 8 Series

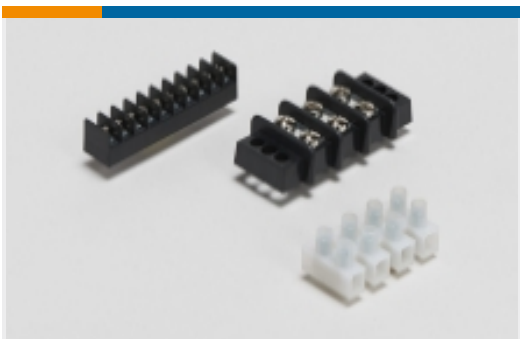

Barrier Strips(122)

Customers Also Bought







TE Part # 62850-1  
110 FASTON REC 20-18 AWG TPBR



TE Part # 9-1437657-8  
8PCV-06-006=#8 TRIBARRIER




TE Part # 1-350948-0  
04P UMNL HDR ASSY R/A V2 NATL



TE Part # 1546215-2  
TERMI-BLOK PCB MOUNT, 90 2P.



TE Part # 5-1437648-7  
4PCV-02-006=4PCV ASSEMBLY

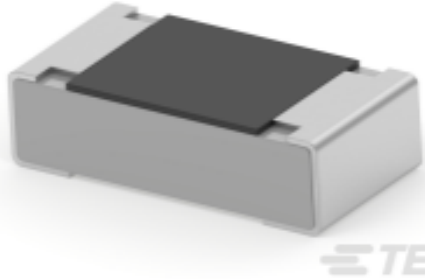

TE Part # 2176340-9  
CRGCQ 0603 22R 5%



TE Part # 2-647123-8  
08P MTA156 SHRD HDR ASSY SQ SN



TE Part # 6-146280-1  
11 MODII HDR SRST B/A .100CL



TE Part # 6-2176613-1  
EP 4W (SS) 330R 5%

Documents

CAD Files

Customer View Model

ENG\_CVM\_CVM\_8-1437657-0\_R1.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_8-1437657-0\_R1.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_8-1437657-0\_R1.3d\_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS

English

1-1773458-2\_BARRIER\_STRIPS\_QUICK\_REFERENCE\_GUIDE

English



Agency Approvals

UL

English