

5148460-1

✓ ACTIVE


EUROCARD

TE Internal #: 5148460-1

Eurocard Connectors, Receptacle, Board-to-Board, 144 Position, .1 in [2.54 mm] Centerline, Printed Circuit Board, 3 Row, Vertical, 48 Column

[View on TE.com >](#)

Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors

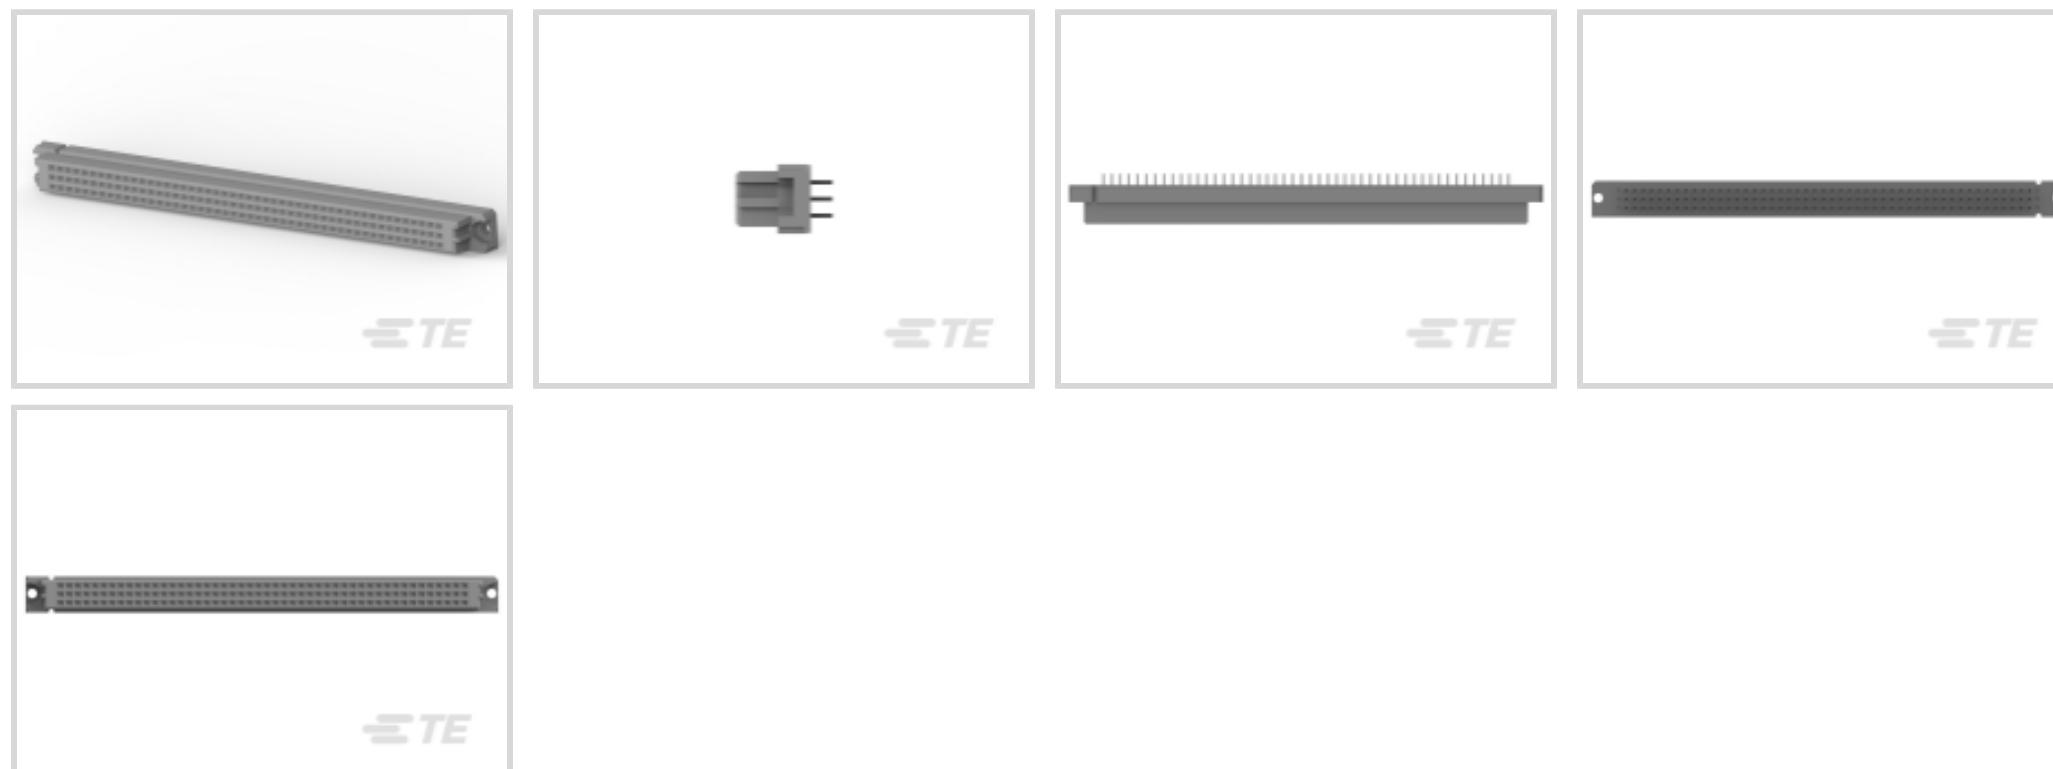

Connector & Housing Type: **Receptacle**

Connector System: **Board-to-Board**

Termination Post & Tail Length: **3.3 mm [.13 in]**

Number of Positions: **144**

Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
DIN Size	Expanded
DIN Level	II

Configuration Features

Number of Positions	144
Number of Rows	3
PCB Mount Orientation	Vertical
Number of Columns	48
Number of Signal Positions	144
Rows Loaded	A, B, C

Contact Features

Contact Type	Socket
--------------	--------

PCB Contact Termination Area Plating Material

Tin

Contact Base Material

Copper Alloy

Contact Current Rating (Max)

1.5 A

Termination Features

Termination Method to Printed Circuit Board

Through Hole - Solder

Termination Post & Tail Length

3.3 mm[.13 in]

Mechanical Attachment

Mating Alignment Type

Polarization

Mating Alignment

With

PCB Mount Retention

Without

Connector Mounting Type

Board Mount

Housing Features

Housing Material

Polyester - GF

Centerline (Pitch)

2.54 mm[.1 in]

Dimensions

Row-to-Row Spacing

2.54 mm[.1 in]

Usage Conditions

Operating Temperature Range

-55 - 105 °C[-67 - 221 °F]

Operation/Application

Circuit Application

Signal

Industry Standards

UL Flammability Rating

UL 94V-0

Packaging Features

Packaging Method

Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024
(240)

Candidate List Declared Against: JAN 2024
(240)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



Documents

Product Drawings

[ASSY,RECPTE,EUROCARD,TYPE C,L-FREE,144/15](#)

English

CAD Files

Customer View Model[ENG_CVM_CVM_5148460-1_O.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model[ENG_CVM_CVM_5148460-1_O.3d_igs.zip](#)

English

Customer View Model[ENG_CVM_CVM_5148460-1_O.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.**Product Specifications**[Application Specification](#)

English