




Connectors > PCB Connectors > Board-to-Board Connectors > PC/104 Connectors

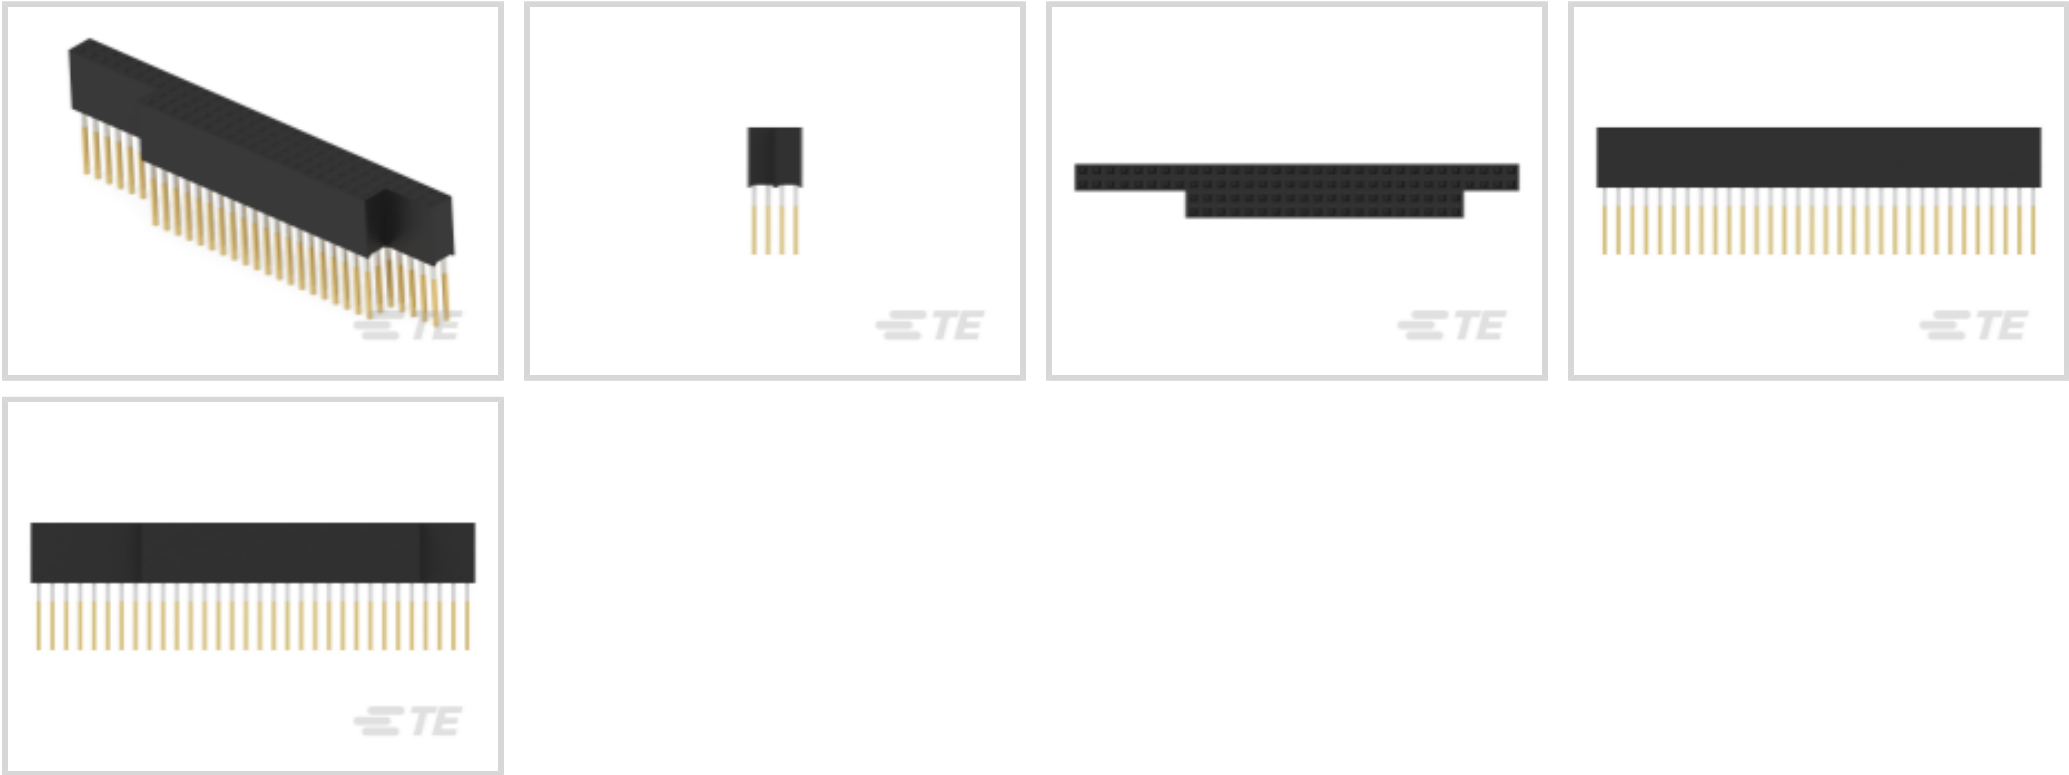

Number of Positions: 104

Centerline (Pitch): 2.54 mm [.1 in]

Number of Loaded Positions: 104

Contact Current Rating (Max): 3 A

Features

Product Type Features

Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Stacking Configuration	Stack Through
Number of Positions	104
Number of Loaded Positions	104

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	1000 MΩ

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Mating Area Plating Material	Gold
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A



Termination Features

Termination Post & Tail Length	12.27 mm[.483 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit

Mechanical Attachment

PCB Mount Retention Type	Action/Compliant Tail
Connector Mounting Type	Board Mount

Housing Features

Housing Material	Nylon - GF
Centerline (Pitch)	2.54 mm[.1 in]

Usage Conditions

Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1445251-1
ORGANIZER PC/104

Customers Also Bought

TE Part # T4112001041-000
M12,FEMALE,RA,A CODE,4P,PG7, GOLD

TE Part # 87227-8
16 MODII HDR DRST UNSHRD .100

TE Part # 2-1761603-7
IDC LOW PRO HDR 20P VERT BLUE

TE Part # 2-1761603-9
IDC LOW PRO HDR 26P VERT BLUE

TE Part # 5103309-1
A/L LOW PRO HDR 10P VERT BLACK

TE Part # 1-1825027-7
FSMRA6JH04=R/A,TACT PB SW,160G

TE Part # 1625854-3
0603 PROBE PAD

TE Part # 2176341-6
CRGCQ 0805 27R 1%

TE Part # 2-2176344-3
CRGCQ 1206 4K7 5%

TE Part # ADP-SMAF-MCXM
SMA Jack to MCX Plug

Documents

Product Drawings
PC104 ASY STKTHRU UNKEYED LF



English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1375795-4_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_1375795-4_H.3d_igs.zip

English

Customer View Model

ENG_CVM_1375795-4_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION1AND2

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English