




Terminals & Splices > Quick Disconnects

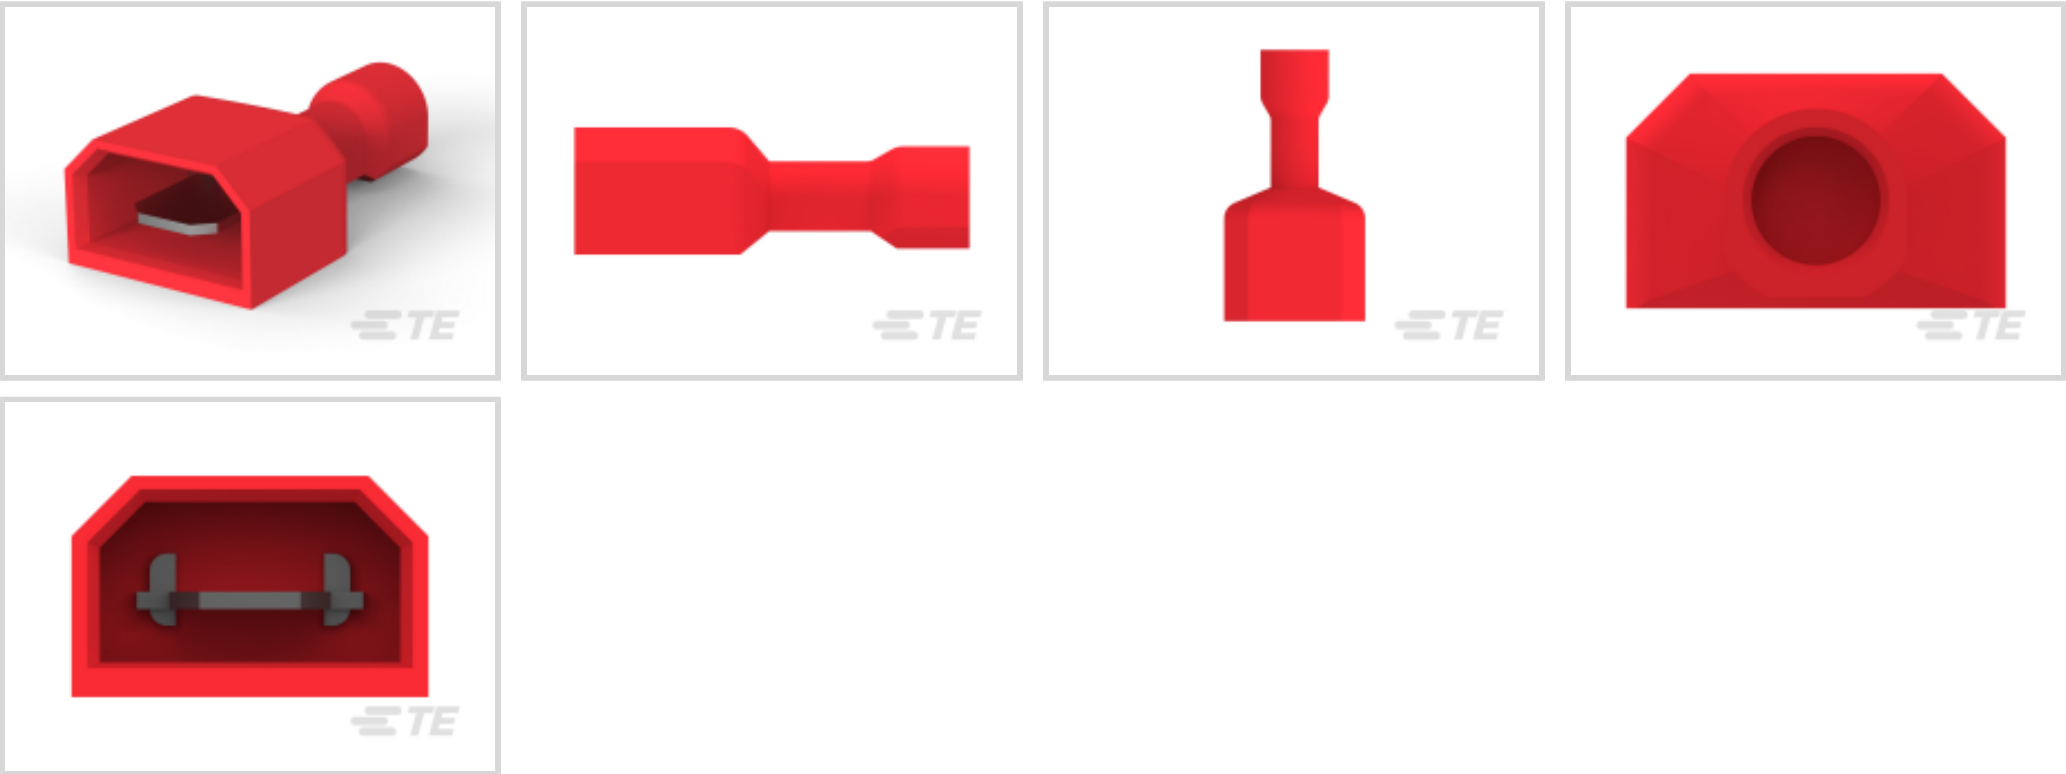

Quick Disconnect Terminal Type: **Tab**

Wire Size: **.32 - .82 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Closed
Termination Features	
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Mating Retention Type	Dimple
Dimensions	
Terminal Material Thickness	.41 mm[.016 in]
Product Length	20.14 mm[.793 in]
Compatible Insulation Diameter Range	3.43 mm[.135 in]
Wire Size	.32 - .82 mm²
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Industry Standards	
Compatible With Agency/Standards Products	UL
UL Flammability Rating	UL 94V-2
Packaging Features	
Packaging Quantity	1000
Packaging Method	Loose Piece/Carton
Other	
Barrel Color	Red

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 58628-2
PROCIMP DIESET 26-14 ULTRAFast

TE Part # 90390-3
DIE ULTRA-FAST FASTON 22-18 DIE SET

TE Part # 58628-1
PROCIMP T&D 26-14 ULTRAFast

TE Part # 2217481-1
KIT, BTLI, SDE CLOSED HEAD

TE Part # 2217481-2
KIT, BTLI, SDE CLOSED HEAD

Also in the Series | Ultra-Fast 187

Quick Disconnects(47)



Customers Also Bought

TE Part # 2-32053-1
PIDG SPD 22-16 COMM 22-18MIL 8

TE Part # 1546921-1
STR RLF ASSY,TUBING,SIZE 11

TE Part # 4-1614881-8
CPF 0603 33R 0.1% 25PPM 5K RL

TE Part # 1954289-3
Connector,Blade & Recpt 6 Pos

TE Part # 102142-9
UNV AMP-LATCH HDR HSG 16P W /MT

TE Part # D74058-000
WP-101165-0.85-9

TE Part # 3-1415073-1
RT4S4T30

TE Part # 350079-5
CMNL PIN 30-22 AUBR

TE Part # 5-2176421-3
TLRP 2512 2.0W R020 1% 50PPM 4K RL

Documents

Product Drawings

ULTRA-FAST 187 ASY REC 22-18 TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-521105-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-521105-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-521105-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

Ultra-Fast and Ultra Fast Plus

English

Product Specifications

Application Specification

English

Agency Approvals

UL

English